



CREATING FOR LIFE SCIENCE

Welcome to the new edition of the ABDOS LIFESCIENCES CATALOG

Abdos now has a new and meaningful vision for its stakeholders; "To be the first choice of customers by building long-term relationships with them through our product range, service levels, innovations and sustainability endeavours." In 2019–20 Abdos started its first overseas plant in Nigeria (Western Africa) in its packaging division. They set up a new greenfield state of the art manufacturing plant (in Kolkata, Eastern India) in its FMCG division. Abdos is into the diversified business of packaging, FMCG, distribution, contract manufacturing, and life sciences. Please connect with us through our websites and various social media platforms to know more about us.

The Life Sciences vertical of Abdos began in the year 2010 with a state of the art manufacturing and distribution centre in Roorkee (India) with offices in New Delhi (India), Kolkata (India), and it's logistics subsidiary in Venlo (Netherlands). Our products are used in various applications, from research to drug discovery & from quality control to diagnostics. Our products add value and improve the lives of people around us.

Last year Abdos Life sciences had undergone massive expansion in both manufacturing and logistics space. This new capability makes us one of the biggest clean room manufacturers in South East Asia. Two years back, Abdos set up its first logistics subsidiary in Europe, which has brought us closer to our customers in 32 European countries. In times to come, there are more subsidiaries planned in other parts of the world. Currently, Abdos products are available through our distributors in India and 65 countries worldwide.

This is our 7th edition of the product catalog with 25 new products and three new product lines. We have added MAXIRCF™ Trace Metal Free Centrifuge Tubes, Biofill™ Vacuum Filtration system, and an entirely new range of Electrophoresis. As always, we are continually evaluating new products, keeping in mind new growth areas and research in the field of life sciences.

In 2020, the global COVID-19 pandemic has changed the landscape of the world and has affected our families, businesses, communities, and our way of life. Our heart goes out to anyone who is impacted by the virus, to whom we extend our heartfelt wishes for a speedy recovery. We're genuinely inspired by the selfless healthcare workers around the world who are on the front lines, working tirelessly to care for people in need. During this time, Abdos team, in all our business verticals, continued to work tirelessly and relentlessly, and we have emerged more reliable than ever before.

Abdos continues to invest in products, infrastructure, customer services, and after-sales. Still, the future is 'digital,' and at Abdos, we embrace the future, so we look forward to connecting with you on our digital platforms like LinkedIn, Facebook, our mobile app, and at our website: www.abdoslifesciences.com. These platforms serve as a knowledge base on products, services, latest events, technical support, and certifications. It also provides some unique scientific utility tools that can be of help to researchers and technicians.

We thank all our stakeholders for their continuous support towards the growth of Abdos.

Jai Hind



Team Abdos

ABDOS manufacturing plant spread over 40,000 square meters







400+ Products & Delivering across 65+ Countries











ASSURED QUALITY

Abdos is investing into the future with cutting-edge robotics and automation platforms to provide consistent and high-performance products. We have initiated "manufacturing happiness" at all our production locations and automation continues to be an integral strategy to achieve it.

QUALITY OBJECTIVE

We are committed to provide the best quality products to our consumers at best possible prices. We will strive to innovate and respond creatively and competitively to changes in external environment and technological advancement. We believe our strength lies in our employees and we are ever so willing to give them training, equipment and tools to empower them to be confident of quality. We conduct periodic reviews to ensure our plant and maintenance systems run effectively and efficiently so that there is no compromise on quality.

We, at Abdos, promise to provide complete consumer satisfaction by emphasizing strongly on continual improvement through lean business processes, with the engagement of employees at all levels.

QUALITY MANAGEMENT

Abdos quality standards are certified according to ISO 9001:2015 through its state of the art production processes, quality inspections, process parameters, SOP and automations. Since 2015 Abdos has received NS-EN ISO 13485:2016 to establish itself as a high quality manufacturer of medical devices. Abdos believes in using the latest technologies with stringent quality control measures and periodic reviews to ensure our plants and warehouses run efficiently and effectively. We believe in the qualification and development of people in our organization and provide them with training, equipment and resources to empower them to be confident of quality.

CE MARKING

Products that fall under the scope of European Directive 98/79/EC on In Vitro Diagnostic Device have been specified as CE IVD in the catalogue. This helps us to comply with the general requirements and safety regulations of CE. Find CE IVD logo on the inside pages as shown here:



Quality Control Process

01

Check Incoming Products

Incoming products like raw materials, packaging materials and consumables are checked for contaminants, strength and aesthetics according to the agreed specifications with the supplier.

03

Application Tests in Laboratory

Each product is checked for physical, chemical and biological functions. Our in-house labs perform the necessary application tests as an end-user, to certify the products are fit to be dispatched to customers.

02

On-line Quality Inspection

During the manufacturing process, the product quality is checked in every shift based on Standard Testing Protocols. If any deviations arise, the required improvements are done during manufacturing.

04

Final Pre-Dispatch Audit

Products are finally tested for proper verification of labels, packaging and documents. Traceability of products is verified at this stage for lot number, expiry date, manufacturing date, etc.

Quality Certifications

Products from Abdos Life Sciences provide the following certifications and application dependent features.



E.A.R - CERTIFICATE GPSD 2001/95/EC & IVD 98/79/EC



QUALITY
MANAGEMENT SYSTEM
ISO 9001



ENVIRONMENT
MANAGEMENT SYSTEM
ISO 14001



MEDICAL DEVICES (Quality Management System) EN ISO 13485

Abdos Knowledge Center

Abdos is more than just products. Our endeavour has always been to provide information on our products and services to optimize the daily work flow. Visit our knowledge center below.



Mobile App


Featuring Data Comparisons, FAQs & More. Download Now from:






Website

Everything you need to know about Abdos Life Sciences, right from product catalog, with ordering facility to technical information, data comparisons & more.





COA Online

Visit ABDOS website and access all the latest COA files online.



Pursuing 'Green' has become a quest for ABDOS towards Go Green Earth, with competitiveness and global excellence.

As a young and innovative company, ABDOS is setting the environmental standards for others to follow.

STEPS TAKEN FOR BEING A GREEN ORGANIZATION

Green Logistics; Goods are transported by rail or sea whenever possible.

Hot runner moulds save on plastic usage.

Closed water cycle cooling process saves energy.

The use of modern, electronic moulding machines which consume less energy than the older, hydraulic machines.

The use of robotic and automation reduce human interference thereby reducing carbon footprint.

As a manufacturer, ABDOS has control over the design and manufacturing of it's products by reducing waste and weight of the plastic, paper bags and foils generated at ours and our supplier's plant.

Abdos eliminates printing waste by e-marketing it's products and services.

A large expanse of greenery and plants at all locations of ABDOS reduce ozone levels, helping to remove carbon dioxide and other greenhouse gases from the air, which cools the earth.



Royal Society of Chemistry

Institutes

- 1. Bhabha Atomic Research Centre, Department of Atomic Energy, Hyderabad.
- 2. Nuclear Fuel Complex, Department of Atomic Energy, Hyderabad
- 3. Analytical Chemistry Division, Bhabha Atomic Research Centre, Department of Atomic Energy, Mumbai.

Topic

Development of a microwave-assisted digestion method for the rapid determination of chloride and fluoride in nuclear-grade boron carbide powders

Product

ABDOS Centrifuge tubes of 15 mL and 50 mL capacity (Product code: P10402 & P10404)

Link

https://pubs.rsc.org/en/content/articlehtml/2014/ay/c3ay41313f



Springer

Institutes

Nanoformulation Research Laboratory, Faculty of Pharmacy, Jamia Hamdard (Hamdard University), New Delhi,

Topic

Transungual Delivery of Ketoconazole Nanoemulgel for the Effective Management of Onychomycosis

Product

ABDOS vortex mixer (Product code : E11190)

Link

https://link.springer.com/article/10.1208/s12249-016-0488-0

ScienceDirect[®]

Science Direct

Institutes

Department of Food Engineering & Technology, Sant Longowal Institute of Engineering & Technology, Longowal, Punjab 148106, India.

Topic

Structural modification of quinoa seed protein isolates (QPIs) by variable time sonification for improving its physicochemical and functional characteristics.

Produc

ABDOS Swirlex-Vortex Shaker (Product code : E11190)



spiedigitallibrary.org

Topic

Application of graphene paper laser ablation for separation of cancer cells.

Product

ABDOS Centrifuge tube (15 ml graduated) (Product code: P10402)



Springer

Institutes

Guwahati Biotech Park, Technology Complex, IIT Guwahati and The Sophisticated Analytical Instrument Facility (SAIF), NEHU Shillong, and College of Veterinary Science. Guwahati.

This work was financially supported by the Department of Biotechnology, Ministry of Science & Technology, Government of India under Grant No. BT/504/NE/TBP/2013.

Topic

Successful Delivery of Zidovudine-Loaded Docosanol Nanostructured Lipid Carriers (Docosanol NLCs) into Rat Brain

Product

ABDOS - Swirlex - Vortex Shaker, (Product code : E11190)
ABDOS Centrifuge tubes of 15 mL and 50 mL capacity (Product code: P10430 & P10431)

bio-protocol

Bio protocol

Inctituto

Microbiology, School of Natural Sciences, National University of Ireland, Galway, Ireland

Topic

Determination of Survival of Wildtype and Mutant Escherichia coli in Soil.

Product

- 1. ABDOS Sterile micropipette tips (100-1,000 μl) (Product code: P10102)
- 2. ABDOS Sterile micropipette tips (2-200 μ l) Product code: P10101)
- 3. ABDOS Microcentrifuge tube (1.5 ml) (Product code: P10202)
- 4. ABDOS Centrifuge tube (15 ml graduated) (Product code: P10402) 90 mm
- 5. ABDOS Petri dishes (Product code: P10901)

Link

https://archivesearch.library.nuigalway.ie/bitstream/handle/10379/6820/ Somorin_%26_0%27Byrne_2017.pdf?sequence=1&isAllowed=y

ELSEVIER

Elsevier

Institutes

Department of Food Engineering & Technology, Sant Longowal Institute of Engineering & Technology, Longowal, Punjab 148106, India.

Topic

Structural modification in album (Chenopodium album) protein isolates due to controlled thermal modification and its relationship with protein digestibility.

Product

ABDOS Swirlex-Vortex Shaker (Product code : E11190)

NOMENCLATURE

CE certified Quality management system Quality management system - Medical Devices **Environment Management System** Petridish Standard Gamma sterilization (Sterile R) Forensic DNA Grade **Accuracy Standards** IVD CERTIFIED IVD 98/79/EC **DNase Rnase Free Endotoxin Free** Human DNA free ATP & Pyrogen free **Heavy Metal Free** Leak-proof Tested 635 mm/Hg STERILE R Sterile (Gamma Irridiatation / Ethylene oxide/ E Beam) STERILE EO STERILE E GC/MS (Gas chromatography & Mass Spectrophotometry Test) 95 kPa pressure Test Autoclave / Non Autoclave **New Product** Alphanumeric Identification Product Suitable for food use Product Suitable for Real-time PCR

The technical data(dimensions, capacities and resistances) specified in this catalogue are approximated. The resistances(to chemical products, temperature, centrifugation..) may suffer variations depending on external conditions. We recommend to test the product under the forecasted conditions of use. Please do not hesitate to ask for samples if necessary.

Do not expose to flame

Recyclable

TABLE OF CONTENTS

PCR PLATES

PCR STRIP CAPS

PCR SEALING FILMS & WORKSTATION

13 - 24 93 - 102**CENTRIFUGE TECHNIQUES ELECTROPHORESIS SYSTEM** MICRO CENTRIFUGE TUBES MINI HORIZONTAL UNITS CENTRIFUGE TURES MIDI HORIZONTAL UNITS **RACKS FOR MICRO CENTRIFUGE TUBE** MAXI HORIZONTAL ELECTROPHORESIS SYSTEMS **RACKS FOR CENTRIFUGE TUBE** VERTICAL DUAL MINI ELECTROPHORESIS SYSTEMS **EOUIPMENTS & MORE POWER SUPPLIES & MORE CRYO TECHNIQUES** 25 - 31 MULTIPURPOSE RACKS & BOXES 103 - 109 **CRYO VIALS ROTATOR WORKSTATION** STORAGE VIALS MULTI COMBINATION RACKS **CRYO BOXES & MORE** REVERSIBLE RACKS POLYGRID TEST TUBE RACKS & MORE 32 - 73110 - 116 LIQUID HANDLING **BOTTLES & CARBOYS** SINGLE & MULTICHANNEL PIPETTES **NARROW & WIDE MOUTH BOTTLES** TIPS: MICRO & LARGE TIPS, FILTER TIPS, LOW RETENTION TIPS **ASPIRATOR BOTTLES SAMPLE CONTAINERS CARBOYS & MORE PASTEUR & SEROLOGICAL PIPETTES RIA VIALS & MORE** 74 - 80 117 - 132 **MICROBIOLOGY** GENERAL LABORATORY PRODUCTS PETRI DISH PS: 60, 90 & 140 MM **BEAKERS & MEASURING CYLINDERS** SOFT INOCULATION LOOPS **VOLUMETRIC FLASKS & DESSICATORS CELL SPREADERS & MORE BIOHAZARD & AUTOCLAVE DISPOSABLE BAGS GLOVES & SAFETY GOGGLES & MORE CELL CULTURE** 81 - 86**EQUIPMENTS** 133 - 161 CELL CULTURE FLASKS, PS **MAGNETIC STIRRERS & HOTPLATES** TISSUE CULTURE TREATED PLATES, PS **DIGITAL DRY BATH & THERMO MIX CELL CULTURE DISHES, PS ROTATING MIXERS & SHAKERS BIO REACTION TUBES, PP DIGITAL INCUBATORS** ROLLER, MEDIA & BIOFILL BOTTLES & MORE OIL FREE VACUUM PUMPS & MORE 87 - 92162 - 179 **PCR TECHNIQUES GENERAL INFORMATION PCR TUBES CONVERSION TABLE - A GUIDE TO BASIC METRIC ESSENTIALS**

TECHNICAL PROPERTIES OF ABDOS LABWARE

INDEX

TERMS & CONDITIONS



01 CENTRIFUGE TECHNIQUES

MICRO CENTRIFUGE TUBES

CENTRIFUGE TUBES

RACKS FOR MICRO CENTRIFUGE TUBE

RACKS FOR CENTRIFUGE TUBE

EQUIPMENTS & MORE

01 | Micro Centrifuge Tubes, PP

- Abdos Micro Centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- These tubes can be used between -80°C to 121°C & with various organic solvents.
- These tubes are boil proof.
- · These tubes come with integral snap cap.
- Frosting on the surface of the tubes makes writing easier.
- Large moulding in graduations make identification easy.
- Can withstand up to 20000 xg RCF*.
- · Amber colour micro centrifuge tubes suitable for light-sensitive samples do not allow any light to pass through the tubes.






















Micro Centrifuges Tube, PP							
Code	Capacity	Outer Diameter	Height	No. / case			
P10201	0.5 ml	10 mm	31.5 mm	1000			
P10202	1.5 ml	13 mm	41 mm	500			
P10203	2.0 ml	13 mm	41 mm	500			
Micro Centrifuges Tubes, PP (Coloured & Amber)							

Code		s Tubes, PP (Coloured & An	nber)		
		Capacity	Outer Diameter	Height	No. / case
	P10207	0.5 ml Coloured	10 mm	31.5 mm	1000
	P10201A	0.5 ml Amber	10 mm	31.5 mm	1000
	P10204	1.5 ml Coloured	13 mm	41 mm	500
	P10204A	1.5 ml Amber	13 mm	41 mm	500
	P10205	2.0 ml Coloured	13 mm	41 mm	500
	P10203A	2.0 ml Amber	13 mm	41 mm	500





02 | LAST DROP™, Low Retention Micro Centrifuge Tubes, PP

- Abdos Micro Centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- · Abdos low binding technology provides 10 times lesser retention level with highly viscous samples & saves costly reagents.
- · These tubes are boil proof.
- These tubes can be used at -80°C and with various organic solvents and are also boil proof.
- These tubes come with integral snap cap.
- · Frosting on the surface of the tubes makes writing easier.
- Large moulding in graduations make identification easy.
- Can withstand up to 20000 xg RCF*






















Code	Capacity	Outer Diameter	Height	No. / case
P10208	0.5 ml	10 mm	31.5 mm	1000
P10209	1.5 ml	13 mm	41 mm	500
P10210	2.0 ml	13 mm	41 mm	500

^{*}Depending on the quality of Centrifuge and compatibility of Rotor.

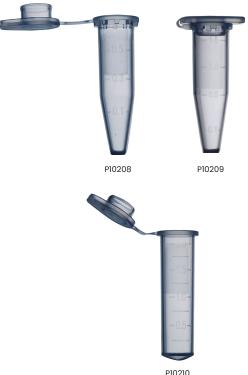

Centrifuge Tube Techniques

Features

Unique printing technology makes the surface chemical resistant & scratch proof.

Perfect grip on screw cap provides secure control on the cap in wet conditions.

Even wall thickness to withstand maximum G-force, 18000*g RCF.

Suitable for temperatures between -80°C and +121°C.

Sterile tubes have been validated according to ISO 11137 SAL 10⁻⁶

The large white frosted portion for easy writing.

Highly transparent, 5% less haze percentage than competitor.

Hydrodynamic conical bottom for perfect pelleting of sediments.

Abdos centrifuge tubes are manufactured from ultra pure USP class VI certified virgin medical grade polypropylene to ensure the highest quality & confirming to US FDA 21 CFR.

Free from heavy metals, natural rubber & inhibitory plasticizers.

Gas chromatography/ Mass spectrometry (GC/MS) tests ensure purity of the products.

The Cap

Specially designed flat thread confirms perfect vacuum tight closure, makes it leak proof & prevents override of cap.

Unique plug seal ensures perfect sealing & makes it leak proof.





03 | Centrifuge Tubes Conical Bottom, PP/HDPE

- Abdos Centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- · The large white frosted portion for easy writing.
- · Silk-Screen graduation makes identification easy.
- Amber colour option for light-sensitive samples.
- Built-in plug in the cap makes it leak proof.
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶
- · Can withstand up to 18000 xg RCF*.





















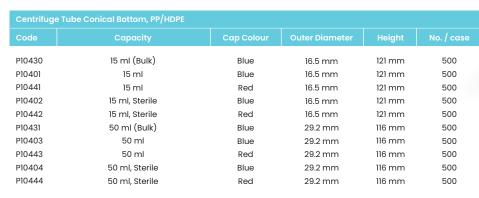

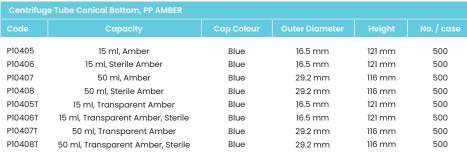

^{*}Depending on the quality of Centrifuge and compatibility of Rotor.

04 | Centrifuge Tubes Conical Bottom, PS/HDPE

- · Abdos Centrifuge tubes are manufactured using high purity virgin USP Class VI Polystyrene (PS) conforming to US FDA 21 CFR, free from natural rubber and heavy metal.
- · Polystyrene centrifuge tube are hydrophobic & its biologically inert surface is good for cell and protein recovery.
- · Perform well with animal cell culture handling.
- · The large white frosted portion for easy writing.
- Silk-Screen graduation makes identification easy.
- · Amber colour option for light-sensitive samples.
- Built-in plug in the cap makes it leak proof.
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶
- Can withstand up to 2500 xg RCF*.



























Code	Capacity	Cap Colour	Outer Diameter	Height	No. / Case
P10419	15 ml, Sterile	Blue	16.5 mm	121 mm	500
P10421	15 ml, Racked Sterile	Blue	16.5 mm	121 mm	750 (25 pcs x 30 racks)

^{*}Depending on the quality of Centrifuge and compatibility of Rotor.



^{*}Transparent Amber Centrifuge tubes can be supplied upon request.

05 | Centrifuge Tubes Self Standing, PP/HDPE

- Abdos Centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Skirted bottom makes it easier to use without any rack.
- The large white frosted portion for easy writing.
- · Silk-Screen graduation makes identification easy.
- · Amber colour option for light-sensitive samples.
- Built-in plug in the cap makes it leak proof.
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶
- Can withstand up to 7000 xg RCF*.





















Code	Capacity	Cap Colour	Outer Diameter	Height	No. / Case
P10432	50 ml (Bulk)	Blue	29.2 mm	117.3 mm	500
P10423	50 ml	Blue	29.2 mm	117.3 mm	500
P10449	50 ml	Red	29.2 mm	117.3 mm	500
P10424	50 ml, Sterile	Blue	29.2 mm	117.3 mm	500
P10450	50 ml, Sterile	Red	29.2 mm	117.3 mm	500

^{*}Depending on the quality of Centrifuge and compatibility of Rotor.



06 | PureRight™Individually Wrapped Centrifuge Tube Conical Bottom, PP/HDPE

- · Abdos Centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Best suited for less number of samples.
- The large white frosted portion for easy writing.
- · Silk-Screen graduation makes identification easy.
- Built-in plug in the cap makes it leak proof.
- Sterile Tubes have been validated according to ISO 11137 for SAL 10^{-6}
- Can withstand upto 18,000 xg RCF* & 7000 xg RCF* for Conical & Self-standing centrifuge tubes respectively.

























Code	Capacity	Cap Colour	Outer Diameter	Height	No. / Case
P10425	15 ml, Sterile	Blue	16.5 mm	121 mm	500
P10451	15 ml, Sterile	Red	16.5 mm	121 mm	500
P10426	50 ml, Sterile	Blue	29.2 mm	121 mm	500
P10452	50 ml, Sterile	Red	29.2 mm	121 mm	500
P10427	50 ml Self Standing, Sterile	Blue	29.2 mm	116 mm	450
P10453	50 ml Self Standing, Sterile	Red	29.2 mm	116 mm	450

^{*}Depending on the quality of Centrifuge and compatibility of Rotor.



07 | Racked Centrifuge Tubes Conical Bottom, Paper

- These Racks are designed to hold Centrifuge Conical Bottom.
- These racks designate a convenient solution for storing Abdos Centrifuge Tubes.
- These racks are made of eco-friendly paper to hold 25 Abdos 15 ml & 50 ml Conical Bottom Centrifuge Tubes.







Code	Capacity	Height	No. / Case
P10409	P10409 15 ml, Rack Only		10
P10410	50 ml, Rack Only	48 mm	10
P10411	15 ml, Racked	121 mm	750 (25 pcs x 30 racks)
P10412	15 ml, Racked, Sterile	121 mm	750 (25 pcs x 30 racks)
P10413	15 ml, Amber, Racked	121 mm	750 (25 pcs x 30 racks)
P10414	15 ml, Amber, Racked, Sterile	121 mm	750 (25 pcs x 30 racks)
P10415	50 ml, Racked	116 mm	400 (25 pcs x 16 Racks)
P10416	50 ml, Racked, Sterile	116 mm	400 (25 pcs x 16 Racks)
P10417	50 ml, Amber, Racked	116 mm	400 (25 pcs x 16 Racks)
P10418	50 ml, Amber, Racked, Sterile	116 mm	400 (25 pcs x 16 Racks)




08 | MaxiRCF™ Trace Metal Free Centrifuge Tubes

- Abdos MaxiRCF™ Trace Metal Free centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Abdos MaxiRCF[™] Trace Metal Free Centrifuge Tubes withstands 20,000xg RCF.
- Pure, Additive Free Natural Colour Cap for easy labelling and Trace Metal free.
- Abdos MaxiRCF™ Trace Metal Free Centrifuge Tubes works excellently in high density gradient separation of sample.
- · Large white frosted area for easy writing.
- Sterile tubes are validated according to ISO 11137 for SAL 10⁻⁶

*Note: MaxiRCF™ Trace Metal Free centrifuge tubes:

- 50 ml CT (Conical Bottom) with 20000*g RCF

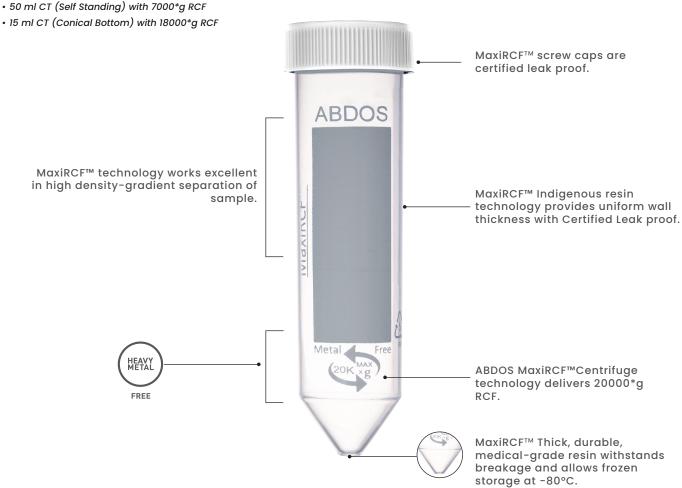





















Code	Capacity	Cap Colour	Outer Diameter	Height	No. / Case
P10480	15 ml (Bulk)	Natural	16.5 mm	121 mm	500
P10481	15 ml	Natural	16.5 mm	121 mm	500
P10482	15 ml, Sterile	Natural	16.5 mm	121 mm	500
P10483	50 ml (Bulk)	Natural	29.2 mm	116 mm	500
P10484	50 ml	Natural	29.2 mm	116 mm	500
P10485	50 ml, Sterile	Natural	29.2 mm	116 mm	500
P10486	50 ml, Self Standing (Bulk)	Natural	29.2 mm	117.3 mm	500
P10487	50 ml, Self Standing	Natural	29.2 mm	117.3 mm	500
P10488	50 ml, Self Standing (Sterile)	Natural	29.2 mm	117.3 mm	500

09 | Rack for Micro Centrifuge Tube, RPP

- Sturdy rack with rubber support at the bottom for stability.
- Racks lock together on each side to allow the user to attach several racks for larger experiments.
- Compatible with both 1.5 ml and 2.0 ml Micro Centrifuge Tube.
- · Easy removal and insertion of tubes.
- Each hole has moulded-in numbers for easy sample identification.





Code	Capacity	Places	Colour	L x W x H	No. / Case
P20205	1.5 & 2.0 ml	20 Places (10x2 Array)	White	215 x 70 x 40 mm	8



10 | Rack For Micro Centrifuge Tube, PC

- Easy to hold ergonomic design.
- Each hole has moulded-in numbers and letters for easy sample identification.
- Racks are stackable when empty or full.
- Easy removal and insertion of tubes.
- Compatible with both 1.5 ml and 2.0 ml Micro Centrifuge Tubes.





Code	Capacity	Places	Colour	LxWxH	No. / Case
P20201	1.5 & 2.0 ml	24 Places (6x4 Array)	White	164 x 100 x 59 mm	8
P20202	1.5 & 2.0 ml	24 Places (6x4 Array)	Yellow	164 x 100 x 59 mm	8
P20203	1.5 & 2.0 ml	48 Places (12x4 Array)	White	293 x 100 x 59 mm	8
P20204	1.5 & 2.0 ml	48 Places (12x4 Array)	Yellow	293 x 100 x 59 mm	8



11 | Centrifuge Tube Box, PP

- Abdos Centrifuge tube box provides a more durable and rugged alternative to cardboard or foam racks.
- The distinctive green colour on the 15 ml and blue colour on the 50 ml makes these racks easy to distinguish.
- These racks can withstand a temperature of -80°C to 121°C.
- All grids are properly indexed with a clear lid that provides easy tube identification.





Code	Tube Capacity	Colour	Places	LxWxH	No. / Case
P20604	15 ml	Green	36 Places (6 x 6 Array)	147 x 147 x 126 mm	4
P20605	50 ml	Blue	16 Places (4 x 4 Array)	147 x 147 x 126 mm	4




12 | Click Together Conical Tube Racks, ABS

- Shipped flat, they are easy to assemble and snap together securely.
- Designed for stable use in a water bath.
- · Alphanumeric index aids for tube identification.





Code	Tube Capacity	Colour	Places	LxWxH	No. / Case
P20218	15 ml & 50 ml	Blue	15 ml Tube - 30 (6 x 5 Array) 50 ml Tube - 20 (5 x 4 Array)	209 x 171 x 63 mm	4
P20219	15 ml & 50 ml	Blue	15 ml Tube - 18 (6 x 3 Array) 50 ml Tube - 10 (5 x 2 Array)	209 x 98 x 63 mm	4





13 | Universal Centrifuge Tube Rack, PP

- Ideal for firmly holding a wide range of tubes and vessels.
- Accepts tubes and vessels from 16-30 mm.
- Moulded indexing for easy identification of tubes and vials.
- Quickly change the tube with this adaptable polypropylene rack. Open the well with a turn of the knob or directly insert a tube into the opening.
- Generous handles for easy transport.





Code	Tube Capacity	Colour	Places	LxWxH	No. / Case
P20212	15 ml & 50 ml	Blue	12 (4 x 3 Array)	194 X 140 X 51 mm	1



14 | Foldable Space Saving Rack, PP

- Simple to open and close, expand and collapse when racks are needed.
- Designed to help recognize 15 and 50 ml tubes.
- Moulded indexing for easy identification of tubes and vials.
- Racks can be stacked in open or closed position.
- · Save space when racks are not in use.
- Available in individual 17 mm hole diameter for 15 ml tubes & 30 mm hole diameter for 50 ml tubes or combination of both 17 mm & 30 mm hole diameter for 15 ml & 50 ml centrifuge tubes.





Code	Tube Capacity	Colour	Places	LxWxH	No. / Case
P20213	15 ml	Purple	45 (9 x 5 Array)	255 x 137 x 72 mm	2
P20214	50 ml	Green	18 (6 x 3 Array)	255 x 137 x 72 mm	2
P20215	15 ml & 50 ml	Blue	15 ml Tube - 21 (7 x 3 Array) 50 ml Tube - 12 (6 x 2 Array)	255 x 137 x 72 mm	2
P20216	15 ml & 50 ml	Pink	15 ml Tube - 21 (7 x 3 Array) 50 ml Tube - 12 (6 x 2 Array)	255 x 137 x 72 mm	2





15 | Floating Rack for Micro Centrifuge Tube, PP

- · Use on the bench, with water bath or ice containers.
- Polypropylene racks keep micro tubes afloat in water bath or can be pushed into crushed ice – perfect for controlling sample temperature.
- Not recommended for autoclaving.
- Detachable legs provide two options:
- a. Attach legs so rack stands upright on bench top.
- b.Detach legs so samples can be quickly popped out by pushing down onto any surface.



Code	Tube Capacity	Colour	Places	LxWxH	No. / Case
P20225	1.5 ml & 2 ml	White	16	102 x 102 x 60 mm	4
P20226	1.5 ml & 2 ml	White	20	98 x 60 (Ø x h) mm	4



16 | Swirl Mini Micro Centrifuge

- Swirl is a small, compact and reliable centrifuge for spin-down and microfiltration procedures.
- Swirl is supplied with 8 place angular rotor of 1.5 ml and a PCR rotor that admit four strips of 0.2 mL PCR strip.
- It has a maximum speed of 7000 rpm/2680 xg RCF.
- It uses minimal bench-top space.
- Rotor can change without tools and the machine accelerates and brakes in seconds.
- Swirl adapts a Brushless DC Motor.
- CE explosion proof safe test IEC/EN61010-2-20.



Code	Product	No. / Case
E11501	Swirl Mini Micro Centrifuge Including 8 Place Rotor for 1.5 & 2.0 ml Tube & 4 Place	1
	Rotor for 8 x 0.2 ml Tube Strip	

Spare Accessories:		
Code	Product	No. / Case
E11502	8 Place Rotor for 1.5 & 2.0 ml	1
E11503	32 (8 x 4) Strips Place Rotor for 0.2 ml PCR & 64 Place Rotor for 0.2 ml PCR tubes	1

SPECIFICATIONS:

SPECIFICATIONS:	
Voltage	220-240 V
Frequency	50-60 Hz
Max Speed	7000 rpm
Max RCF	2680 xg
Run Time	Continuous operation
Rotor Capacity	0.2/0.5/1.5/2.0 mL x 8 0.2 mL x 32 PCR Strips 2.0 mL x 4 PCR 8 Strips
Noise Level	≤45 dB
Dimensions	160 x 170 x 122 mm
Weight	0.5 kg
Permissible ambient temperature	4 to 45°C
Permissible relative humidity	80%



17 | Swirl Maxi Micro Centrifuge

- Swirl Maxi is a personal micro centrifuge used for sedimentation of cells and virus, separation of sub-cellular organelles and isolation of macromolecules such as DNA, RNA, proteins or lipids.
- Swirl Maxi is used in physical and chemical analysis, biochemistry, cellular biology, clinical labs, blood donation centre and high-end research.
- Swirl Maxi has a large ergonomic design with easy to read display and sound.
- · Both RPM and G-force can be displayed.
- Swirl Maxi is stable and silent during operation. It also delivers fast acceleration and deceleration.
- Swirl Maxi conforms to international safety standards and regulations. It has also passed the explosion proof test from CE,
 TUV and FCC.
- Swirl Maxi adapts a Brushless DC Motor.
- Automatic lid-lock release prevents sample warming and allows easy access to samples.
- The short spin function is used for quick spins by pressing and holding PULSE key. The centrifuge speed can be accelerated and held at the target speed.
- High strength aluminium alloy rotors are fully autoclavable, and can withstand stream sterilizing at 121°C for 20 minutes.



Code	Product	No. / Case
E11510	Swirl Maxi Micro Centrifuge with 12 Place Rotor for 0.2, 0.5, 1.5 $\&$ 2.0 ml $$	1
Spare Ad	ccessories:	
Code	Product	No. / Case
E11511	12 Place Rotor for 0.2, 0.5, 1.5 & 2.0 ml	1
E11512	Rotor Adapter for 0.2 ml - 2.0 ml used with E11511	24
E11513	Rotor Adapter for 0.5 ml - 2.0 ml used with E11511	24

SPECIFICATIONS:

SPECIFICATIONS:	
Voltage	220-240 V
Frequency	50-60 Hz
Current	3 A
Max Speed	15000 rpm (500-15000 rpm) with increment
	of 100 rpm
Max. RCF [xg]	15100 xg with increment of 100 xg
Speed Accuracy	±20 rpm
Rotor Capacity	0.2mL, 0.5mL, 1.5 mL & 2mL x 12 places.
Run Time	30 sec - 99 min - HOLD (Continuous oper-
	ation)
Driving Motor	Brushless DC motor
Safety Devices	Dual door interlock
	Over-speed detection
	Over temperature detection
	Automatic internal diagnosis
Noise Level	≤54 dB
Additional Features	Speed/RCF switch
	Short-time run function
	Sound-alert function
Acceleration /Braking time	11 sec for Acceleration & 9 sec for Breaking
Dimensions	255 x 245 x 140 mm
Weight	6 kg
Permissible Ambient Temperature	4°C to 40°C
Permissible Relative Humidity	80%



18 | Swirl Clinical Centrifuge

- Swirl Clinical Centrifuge is used for separation of serum, plasma, urea, urine, blood samples and other routine
 applications in hospital and research. They are also used in environmental analyses for clarification of water and soil
 samples and in schools as a teaching aid.
- Swirl Clinical Centrifuge has a large ergonomic design with easy to read display and sound alert.
- · Automatic lid opening when run is complete prevents sample warming and allow easy access of samples.
- · Both RPM and G-force can be displayed.
- · Digital LCD display can show real time parameters and has symbol showing experimental process.
- Swirl Clinical is used for quick spins by pressing and holding the pulse key.
- It has precise control, high accuracy of speed and has gentle breaking at low speeds with efficient separation.
- Swirl Clinical conforms to international safety standards and regulations. It has also passed the explosion proof test from CE, TUV and FCC.
- Bio-safe rotor and anti-sample overflow prevents sample leakage in the centrifugal process causing microbial contamination.
- Swirl Clinical adapts a Brushless DC Motor.
- Passed EN61010-2-101:2002 for invitro diagnostic (IVD) medical equipment.
- · Goes into a self-diagnostic check when switched on and then displays accumulative time & last running parameter.



Code	Product	No. / Case
E11540	Swirl Clinical Clinical Centrifuge with 8 Place Rotor for 15 ml & 12 Place Rotor for 5, 7 & 10 ml centrifuge tube & Rotor Adapter for 10 ml centrifuge tube	1

Spare Ad	Spare Accessories:		
Code	Product	No. / Case	
E11541	8 Place Rotor for 15 ml & 12 Place Rotor for 5, 7 & 10 ml	1	
E11542	Rotor Adapter for 10 ml used with E11541	12	

SPECIFICATIONS :

SPECIFICATIONS:	
Voltage	220-240 V
Frequency	50-60 Hz
Current	3 A
Max Speed	300-4500 rpm with increment of 100 rpm
Max. RCF [xg]	2490 xg with increment of 100 xg
Speed Accuracy	±20 rpm
Rotor Capacity	5 mL/7 mL/10 mL x 12 places.
	15 mL x 8 places
Run Time	30 sec-99 min-HOLD (Continuous oper-
	ation)
Driving Motor	Brushless DC motor
Safety Devices	Dual door interlock
	Over-speed detection
	Over temperature detection
	Automatic internal diagnosis
Noise Level	≤56 dB
Additional Features	Speed/RCF switch
	Short-time run function
	Sound-alert function
Acceleration /Braking time	20 sec for both Acceleration & Breaking
Dimensions	301 x 354 x 217 mm
Weight	6 kg
Permissible Ambient Temperature	+4 to +40°C
Permissible Relative Humidity	80%



19 | Swirl Micro Plate Centrifuge

- Less than half the size of conventional centrifuge (9 x 10 inches).
- The easily reachable rotor chamber includes two plate carriers that rest at a 75° angle, thus allowing plates to be inserted confidently without seal in tapes or caps.
- Upon closing the lid of the centrifuge, the rotor accelerates and the centrifugal force swings the plates into a horizontal position. Any droplets on the walls of the plate quickly concentrate into the well bottoms.
- With a G-force of 600 xg, most samples can be spun.
- Just open the lid and the automatic electric brake brings the rotor to a quick & smooth stop in just 4.0 seconds.



Code	Product	No. / Case
E11550	Swirl Micro Plate Centrifuge	1
Spare Ac		
Code	Product	No. / Case
E11551	Adapter, 96 x 0.2 ml or 8 and 12 x PCR strips.	2

SPECIFICATIONS:

Voltage	220-230 V
Frequency	50-60 Hz
Max Speed	2550 rpm/600 xg
Rotor Capacity	2 x 2 PCR Plates
	2 x Microtiter plates
	24 x 0.2 mL PCR Strips
Deceleration	4 seconds
Dimensions	230 x 260 x 197 mm
Weight	4.0 kg
Permissible Ambient Temperature	4 to +40°C
Permissible Relative Humidity	80%

^{*}When stacking skirted PCR plates, max capacity is 4 plates.





Before & after centrifugation (angled position)



During centrifugation (Horizontal position)

#CommittedtotheEarth



O2CRYO TECHNIQUES

CRYO VIALS
STORAGE VIALS
CRYO BOXES
& MORE

20 | Cryo Vial External Thread, PP

- · Abdos Cryo Vial external thread are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- · Abdos Cryo Vial is designed for long-term cryogenic storage of biological samples, all type of cells and any enzymes or reagents.
- · It's leak-proof cap design and strong wall thickness makes it an ideal product for transporting samples and specimens.
- These cryo vials are designed for mechanical freezing and it's a screw cap reduces the risk of contamination due to handling.
- Manufactured to be used at a temperature between -196°C to 121°C.
- · The large white frosted portion for easy writing.
- Graduation in silk-screen printing makes identification easy.
- · Unique Star Foot design allows for single hand operation and grooves into Abdos P20616 single hand cryo holder rack.
- Best suited for IVD use (an IVD Certified product).
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶
























Code	Capacity	Outer Diameter	Height	No. / Case	
P60115	1.0 ml Sterile Star Foot	12.00 mm	41.0 mm	1000	
P60116	1.8 ml Sterile Star Foot	12.00 mm	48.5 mm	1000	
P60117	1.8 ml Sterile Round Bottom	12.00 mm	47.5 mm	1000	
P60118	4.5 ml Sterile Skirted Foot	11.80 mm	86.5 mm	500	

^{*} Please note compatable coders for P60118 Cryo Vial 4.5 ml Skirted Foot is P60104.





4.5

4.0

3.5

3.0



The graph demonstrates no absorbants & confirms no traceable leeching with DMSO (Dimethyl sulfoxide).

Caution: Do not use Abdos Cryogenic vial in the liquid phase of liquid nitrogen. Improper use may cause liquefied nitrogen to be trapped inside the vial & lead to pressure build up resulting in possible explosion or biohazard release. Can be used in vapour phase of liquid nitrogen.

21 | Cryo Vial Internal Thread, PP

- Abdos Cryo Vial internal thread are manufactured using high purity virgin USP Class VI Medical grade polypropylene
 (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Abdos Cryo Vial is designed for long-term cryogenic storage of biological samples, all type of cells and any enzymes or reagents.
- It's leak-proof cap design with Silicon Seal and strong wall thickness makes it an ideal product for transporting samples and specimens.
- · These cryo vials are designed for vapour phase LN, freezing and also incorporate a silicone seal to enhance cap sealing.
- Manufactured to be used at a temperature between -196°C to 121°C.
- · The large white frosted portion for easy writing.
- · Graduation in silk-screen printing makes identification easy.
- Unique Star Foot design allows for single hand operation and grooves into Abdos P20616 single hand cryo holder rack.
- The silicon ring used in Abdos Cryo Vial for Sealing effects is made up of the material & ingredient under the code of federal regulation 21, as per 21 CFR 177.2600 (G) & meets USP Class VI Regularities under plastic vial & Cap.
- Best suited for IVD use (an IVD Certified product).
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶























Code	Capacity	Outer Diameter	Height	No. / Case
P60108	1.0 ml Sterile Star Foot	12.3 mm	41.2 mm	1000
P60109	1.8 ml Sterile Star Foot	12.3 mm	47.5 mm	1000
P60110	1.8 ml Round Bottom	12.3 mm	46.2 mm	1000
P60112	4.5 ml Sterile Star Foot	12.3 mm	90.3 mm	500
P60113	4.5 ml Sterile Round Bottom	12.3 mm	89.0 mm	500

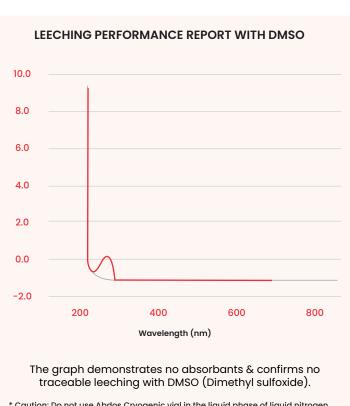

^{*} Caution: Do not use Abdos Cryogenic vial in the liquid phase of liquid nitrogen. Improper use may cause liquefied nitrogen to be trapped inside the vial and lead to pressure build up resulting in possible explosion or biohazard release. Can be used in vapour phase of liquid nitrogen.



22 | Cryo Coders for External & Internal Threaded Vials, HDPE

- · These coders fit onto the top of 'Abdos' skirted foot externally threaded cryogenic vial closures.
- · These provide quick visual identification of specific vials to simplify inventory maintenance.
- · Available in a wide range of colours.

Code	Colour Of Cap	No. / Case	
P60114 W	White	100	
P60114 B	Blue	100	
P60114 R	Red	100	
P60114 Y	Yellow	100	
P60114 G	Green	100	



23 | Storage Vial, PP

- Abdos Storage Vial are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Used for storage of PCR reagents, enzymes and other diagnostics & biochemical reagents or samples.
- HDPE screw closure is leak proof.
- · Can be used at low temperature.
- · Amber Storage Vial can be used for light-sensitive samples.





















Storage Vial Natural, PP				
Code	Capacity	Outer Diameter	Height	No. / Case
P60119	1.0 ml	12.0 mm	41 mm	1000
P60106	2.0 ml	11.8 mm	47.2 mm	1000
P60107	5.0 ml	11.8 mm	88.0 mm	1000

P60119 A 1.0 ml Amber 12.0 mm 41 mm 1000 P60119 A1 1.0 ml Transparent Amber 12.0 mm 41 mm 1000 P60106 A 2.0 ml Amber 11.8 mm 47.2 mm 1000 P60106 A1 2.0 ml Transparent Amber 11.8 mm 47.2 mm 1000	Storage Vial Amber, PP				
P60119 A1 1.0 ml Transparent Amber 12.0 mm 41 mm 1000 P60106 A 2.0 ml Amber 11.8 mm 47.2 mm 1000 P60106 A1 2.0 ml Transparent Amber 11.8 mm 47.2 mm 1000	Code	Capacity	Outer Diameter	Height	No. / Case
P60106 A 2.0 ml Amber 11.8 mm 47.2 mm 1000 P60106 A1 2.0 ml Transparent Amber 11.8 mm 47.2 mm 1000	P60119 A	1.0 ml Amber	12.0 mm	41 mm	1000
P60106 A1 2.0 ml Transparent Amber 11.8 mm 47.2 mm 1000	P60119 A1	1.0 ml Transparent Amber	12.0 mm	41 mm	1000
	P60106 A	2.0 ml Amber	11.8 mm	47.2 mm	1000
P60107 A 5.0 ml Amber 11.8 mm 88 mm 1000	P60106 A1	2.0 ml Transparent Amber	11.8 mm	47.2 mm	1000
1.0 Till 0.0 Till 1000	P60107 A	5.0 ml Amber	11.8 mm	88 mm	1000
P60107 A1 5.0 ml Transparent Amber 11.8 mm 88 mm 1000	P60107 A1	5.0 ml Transparent Amber	11.8 mm	88 mm	1000



P60107 P60106

24 | Single Hand Cryo Holder Rack, PP

- Designed for use with Cryogenic Vial, Freezer Tubes, Storage Vial and Micro Tubes.
- It has unique innovative locking system allowing the user to unlock star foot Cryo Vial with one hand.
- The rack has a secure locking system in each well that will not allow the Cryo Vial to turn on either side.
- Inbuilt numbered and letters grid for sample identification.
- · Anti-skid rubber feet support the rack.









25 | Cryo Box, PC

- Made of strong polycarbonate and designed to be used at a temperature between -196°C to 121°C.
- · Can be used in gas phase of liquid nitrogen with appropriate safety procedure in place.
- Transparent lids permit viewing of contents.
- These boxes create small, space-efficient storage system within a large mechanical freezer.
- Lids have numbered grid for sample identification. The surface of the lid has a frosted area suitable for writing with markers, facilitating inventory control.
- The dimensions of the cryo box are compatible with vertical, horizontal and drawer style freezer racks.
- · Specially Designed venting in base & lid ensures a smooth flow for vapours for consistency in cooling.





Code	Tube Capacity	Places	Colour	LxWxH	No. / case
P20601	1 - 2 ml	25 (5 x 5 Array)	White, Yellow, Blue	75 x 75 x 54 mm	8
P20601 Assorted	1 - 2 ml	25 (5 x 5 Array)	White, Yellow, Blue	75 x 75 x 54 mm	8
P20602	1 - 2 ml	81 (9 x 9 Array)	White, Yellow, Blue	133 x 132 x 54 mm	4
P20602 Assorted	1 - 2 ml	81 (9 x 9 Array)	White, Yellow, Blue	133 x 132 x 54 mm	4
P20603	5 ml	81 (9 x 9 Array)	White, Yellow, Blue	133 x 132 x 97 mm	4
P20603 Assorted	5 ml	81 (9 x 9 Array)	White, Yellow, Blue	133 x 132 x 97 mm	4
* Add colour code o	of your choice- W	rhite (W), Yellow (Y), Blue (B).		

26 | Cryo Box, System 100 places, PC

- Made of strong polycarbonate and designed to be used at a temperature between -196°C to 121°C.
- Can be used in gas phase of liquid nitrogen with appropriate safety procedure in place.
- These boxes have 10x10 array (100 places) that can optimize the storage volume of the end user.
- These boxes create small, space-efficient storage system within a large mechanical freezer.
- Transparent lids permit viewing of contents.
- Lids have numbered grid for sample identification. The surface of the lid has a frosted area suitable for writing with markers, facilitating inventory control.
- The dimensions of the P20615 Cryo Box are compatible with vertical, horizontal and drawer style freezer racks.





Code	Tube Capacity	Places	Colour	LxWxH	No. / case
P20615	1 - 2 ml (Freezer Compatible)	100 (10 x 10 Array)	White, Yellow, Blue	133 x 133 x 54 mm	4
P20611	1 - 2 ml	100 (10 x 10 Array)	White, Yellow, Blue	140 x 140 x 54 mm	4

^{*} Add colour code of your choice- White (W), Yellow (Y), Blue (B).



27 | Cryo Cube Box / Storage Cube Box, PP

- Manufactured in state of the art moulding facility using high purity polypropylene.
- These boxes are stackable, versatile and designed for sample storage up to -80°C.
- These boxes help you to meet storage requirements of 1.5 2.0 ml microtubes & 1.0-2.0 ml cryogenic vials.
- The dimension of P20614 Cryo Cube Box is compatible with vertical, horizontal & drawer style freezer racks.
- These boxes have hinged lid connected to the base and the ultra smooth locking system ensures secure closure preventing accidental opening of these boxes in deep freezers.
- Inbuilt numbered and letters grid for sample identification.





Code	Capacity	Places	Colour	L x W x H	No. / Case
P20612	1.5 - 2 ml Micro Tube & 1- 2 ml Cryo Tube	50 (10 x 5 Array)	Green, Yellow, Blue	142 x 85 x 59 mm	8
P20614	1.5 - 2 ml Micro Tube & 1- 2 ml Cryo Tube	81 (9 x 9 Array)	Green, Yellow, Blue	130 x 130 x 55 mm	4
P20607	1.5 - 2 ml Micro Tube & 1- 2 ml Cryo Tube	100 (10 x 10 Array)	Green, Yellow, Blue	140 x 140 x 55 mm	4



28 | Freezing Cardboard Cryo Boxes, CARDBOARD

- · Designed for storage and preservation of frozen samples.
- Can withstand ultra-low temperature in deep freezer.
- The removable top lid makes it easy to open and close.
- · These boxes can be used for upright freezers, drawers & chest freezers with dividers.
- Lamination on these boxes does not allow moisture to soak or liquid to stick on these boxes.





Code	Tube Capacity	Places	LxWxH	No. / Case
P20606	1.5 - 2 ml Micro Tube & 1- 2 ml Cryo Tube	81 (9 x 9 Array)	132 x 132 x 50 mm	8
P20613	1.5 - 2 ml Micro Tube & 1- 2 ml Cryo Tube	100 (10 x 10 Array)	132 x 132 x 50 mm	8



29 | Cryo Apron

- These Cryo aprons provide a high level of thermal protection to the torso and upper legs in harsh cryogenic atmospheres.
- Multi-layered construction allows for the maximum level of thermal protection and waterproof nylon outer shell protects you from cryogenic splashes and keeps you safe and comfortable.
- These Cryogenic aprons have quick-release buckles at the neck & waist for added safety and function.
- · Not for immersion in liquid nitrogen.

Code	Size	No. / Case
U20331	36 inch or 91.4 cm	1
U20332	42 inch or 106.7 cm	1
U20333	48 inch or 121.9 cm	1
U20334	54 inch or 137.2 cm	1

Application	Environment
Cold room / walking freezer	Cryo preservation facilities
Blast freezers	Cryogenic liquid producers
Delivery and filling of cryogenic liquid	Clinical lab Bio medical Blood banks Frozen food processing



30 | Cryo Gloves

- These cryogenic gloves protect your hands and arms when working in hazardous, ultra-cold environments.
- These gloves have an innovative design that offers superior thermal protection allowing for a maximum level of flexibility and dexterity.
- These cryo gloves are made from state-of-the-art fabrics and use a flexible, multi-layered insulated construction that provides maximum thermal protection to perform tasks effectively and safely.
- · High performance, thermal inner lining wicks moisture away from hands, maintaining comfort over extended periods.
- · Not for immersion in liquid nitrogen.

Code	Places	No. / Case
U20307	Wrist S	1 Pair
U20308	Wrist M	1 Pair
U20309	Wrist L	1 Pair
U20310	Wrist XL	1 Pair
U20311	Mid Arm S	1 Pair
U20312	Mid Arm M	1 Pair
U20313	Mid Arm L	1 Pair
U20314	Mid Arm XL	1 Pair
U20315	Elbow S	1 Pair
U20316	Elbow M	1 Pair
U20317	Elbow L	1 Pair
U20318	Elbow XL	1 Pair

Application	Environment				
Ultra low blast freezers	Clinical laboratory				
Cold rooms	Bio medical				
Dry ice handling	Blood banks Pharmaceutical Frozen food processing				



31 | Water Proof Cryo Gloves

- These cryogenic gloves protect your hands and arms when working in hazardous, ultra-cold environments.
- These gloves are designed to provide a high level of thermal protection where the exposure to cryogenic fluids might exist.
- These gloves are multi-layered and allow for a maximum level of thermal protection, flexibility and dexterity essential feature when the function is important and safety is critical.
- · Not for immersion in liquid nitrogen.

Code	Size	No. / Case
U20319	Wrist S	1 Pair
U20320	Wrist M	1 Pair
U20321	Wrist L	1 Pair
U20322	Wrist XL	1 Pair
U20323	Mid Arm S	1 Pair
U20324	Mid Arm M	1 Pair
U20325	Mid Arm L	1 Pair
U20326	Mid Arm XL	1 Pair
U20327	Elbow S	1 Pair
U20328	Elbow M	1 Pair
U20329	Elbow L	1 Pair
U20330	Elbow XL	1 Pair

Application	Environment
LN2 atmosphere and environment	Fertility clinic
Refrigirated liquid baths	Bio medical
Cryo freezers	Genetic and bio technology
Cryogenic grinding	Pharmaceutical



#CommittedtotheEarth



03 LIQUID HANDLING

SINGLE & MULTICHANNEL PIPETTES

TIPS: MICRO & LARGE TIPS, FILTER TIPS, LOW RETENTION TIPS

SAMPLE CONTAINERS

PASTEUR & SEROLOGICAL PIPETTES

RIA VIALS & MORE

Abdos Pipettes

ABDOS pipette meets the highest needs in precision and accuracy – combined with ultimate ergonomics and increased flexibility with sophisticated blend of features and functionality.

It is easy to calibrate and maintain with tools supplied.

It is supplied with operator manual that provides complete information on recalibration and maintenance of the pipette.









32 | Fixed Premium Pipette, PP





			Maximum Permissil	ole Systematic Error	Maximum Permissible Random Error		
Code	Capacity	Test Volume	Inaccuracy	Inaccuracy	Imprecision	Imprecision	No. / Case
E10001	5 μΙ	5 μΙ	± 1.3 %	± 0.065 µl	± 1.2 %	± 0.06 µl	1
E10002	10 μΙ	10 μΙ	± 0.8 %	± 0.08 µI	± 0.8 %	± 0.08 µl	1
E10003	20 μΙ	20 μΙ	± 0.6 %	± 0.12 µl	± 0.5 %	± 0.1 µl	1
E10004	25 µI	25 μΙ	± 0.5 %	± 0.125 μl	± 0.3 %	± 0.075 μl	1
E10005	50 µl	50 μl	± 0.5 %	± 0.25 µl	± 0.3 %	± 0.15 µl	1
E10006	100 μΙ	100 μΙ	± 0.5 %	± 0.50 µl	± 0.3 %	± 0.30 µl	1
E10007	200 μΙ	200 μΙ	± 0.4 %	± 0.80 µl	± 0.2 %	± 0.40 µl	1
E10008	250 μΙ	250 μΙ	± 0.4 %	± 1 µl	± 0.2 %	± 0.50 µl	1
E10009	500 µl	500 μΙ	± 0.3 %	± 1.5 µl	± 0.2 %	± 1.0 μl	1
E10010	1000 μΙ	1000 μΙ	± 0.3 %	± 3 µl	± 0.2 %	± 2.0 µl	1

33 | Premium Pipettes Semi-Autoclavable, PP





			Maximum Permissible Systematic Error		Maximum Permissible Random Error			
Code	Capacity	Increment	Test Volume	Inaccuracy	Inaccuracy	Imprecision	Imprecision	No. / Case
			2.5 µl	± 2.50 %	± 0.062 µl	± 2.00 %	± 0.05 µl	
E11100	0.1 – 2.5 µl	0.05 µl	1.25 µl	± 3.00 %	± 0.037 µl	± 3.00 %	± 0.0375 µl	1
			0.25 µl	± 12.00 %	± 0.03 µl	± 6.00 %	± 0.015 µl	
			10 µI	± 1.00 %	± 0.1 µl	± 0.80 %	± 0.08 µl	
E11101	0.5 – 10 µl	0.1 µI	5 µl	± 1.50 %	± 0.175 µl	± 1.50 %	± 0.075 µl	1
			1 µl	± 2.50 %	± 0.025 µl	± 1.50 %	± 0.015 µl	
			20 µl	± 0.90 %	± 0.18 µl	± 0.40 %	± 0.08 µl	
E11102	2 – 20 µl	0.5 µl	10 µl	± 1.20 %	± 0.12 µl	± 1.00 %	± 0.10 µl	1
			2 µl	± 3.00 %	± 0.06 µI	± 2.00 %	± 0.04 µl	
			50 µl	± 0.60 %	± 0.3 µl	± 0.30 %	± 0.15 µl	
E11106	5 – 50 µl	0.5 µl	25 µl	± 0.90 %	± 0.225 µl	± 0.60 %	± 0.15 µl	1
			5 μΙ	± 2.00 %	± 0.1 µl	± 2.00 %	± 0.1 µl	
			100 µl	± 0.80 %	± 0.80 µl	± 0.15 %	± 0.15 µl	
E11103	10 – 100 µl	1.0 µl	50 µl	± 1.00 %	± 0.50 µl	± 0.40 %	± 0.20 µl	1
			10 µl	± 3.00 %	± 0.30 µl	± 1.50 %	± 0.15 µl	
			200 µl	± 0.60 %	± 1.20 µl	± 0.15 %	± 0.30 µl	
E11104	20 – 200 µl	1.0 µl	100 µl	± 0.80 %	± 0.80 µl	± 0.30 %	± 0.30 µl	1
			20 µl	± 3.00 %	± 0.60 µl	± 1.00 %	± 0.20 µl	
			200 µl	± 0.60 %	± 1.20 µl	± 0.15 %	± 0.30 µl	
E11112	50 – 200 µl	1.0 µl	100 µl	± 0.80 %	± 0.80 µl	± 0.30 %	± 0.30 µl	1
			50 µl	± 1.00 %	± 0.50 µl	± 0.40 %	± 0.2 µl	
			1000 µl	± 0.60 %	± 6 µl	± 0.20 %	± 2 µl	
E11105	100 – 1000 µl	5 µl	500 µl	± 0.70 %	± 3.50 µl	± 0.25 %	± 1.25 µl	1
	·	•	100 µI	± 2.00 %	± 2 µl	± 0.70 %	± 0.70 µl	
			5000 µl	± 0.50 %	± 25 µl	± 0.15 %	± 7.5 µl	
E11131	1000 – 5000 µl	50 µl	2500 µl	± 0.60 %	± 15 µl	± 0.30 %	± 7.5 µl	1
			1000 µI	± 0.70 %	± 7 μl	± 0.30 %	± 3 µl	
			10000 μΙ	± 0.60 %	± 60 µl	± 0.20 %	± 20 µl	
E11132	2000 – 10000 µl	100 µI	5000 µl	± 1.20 %	± 60 µl	± 0.30 %	± 15 µl	1
	·	-	2000 µl	± 3.00 %	± 60 µl	± 0.60 %	± 12 µl	

34 | Premium Plus Pipettes Fully-Autoclavable, PP







				Maximum Permissible Systematic Error		Maximum Permissible Random Error		
Code	Capacity	Increment	Test Volume	Inaccuracy	Inaccuracy	Imprecision	Imprecision	No. / Case
			2.5 µl	± 2.50 %	± 0.062 µl	± 2.00 %	± 0.05 µl	
E11145	0.1 – 2.5 µl	0.05 µl	1.25 µl	± 3.00 %	± 0.037 µl	± 3.00 %	± 0.0375 µl	1
			0.25 µl	± 12.00 %	± 0.03 µl	± 6.00 %	± 0.015 µl	
			10 µl	± 1.00 %	± 0.1 µl	± 0.80 %	± 0.08 µl	
E11107	0.5 – 10 µl	0.1 µl	5 µl	± 1.50 %	± 0.175 µl	± 1.50 %	± 0.075 µl	1
			1 µl	± 2.50 %	± 0.025 µl	± 1.50 %	± 0.015 µl	
			20 µl	± 0.90 %	± 0.18 µl	± 0.40 %	± 0.08 µl	
E11108	2 – 20 µl	0.5 µl	10 µl	± 1.20 %	± 0.12 µl	± 1.00 %	± 0.10 µl	1
		·	2 µl	± 3.00 %	± 0.06 µl	± 2.00 %	± 0.04 µl	
			50 µl	± 0.60 %	± 0.3 µl	± 0.30 %	± 0.15 µl	
E11146	5 – 50 µl	0.5 µl	25 µl	± 0.90 %	± 0.225 µl	± 0.60 %	± 0.15 µl	1
		•	5 μl	± 2.00 %	± 0.1 µl	± 2.00 %	± 0.1 µl	
			100 µl	± 0.80 %	± 0.80 µl	± 0.15 %	± 0.15 µl	
E11109	10 – 100 µl	1.0 µl	50 μl	± 1.00 %	± 0.50 µl	± 0.40 %	± 0.20 µl	1
			10 µl	± 3.00 %	± 0.30 µl	± 1.50 %	± 0.15 μl	
			200 µl	± 0.60 %	± 1.20 µl	± 0.15 %	± 0.30 µl	
E11110	20 – 200 µl	1.0 µl	100 µl	± 0.80 %	± 0.80 µl	± 0.30 %	± 0.30 µl	1
	·		20 µl	± 3.00 %	± 0.60 µl	± 1.00 %	± 0.2 µl	
			200 µl	± 0.60 %	± 1.20 µl	± 0.15 %	± 0.30 µl	
E11147	50 – 200 µl	1.0 µl	100 µl	± 0.80 %	± 0.80 µl	± 0.30 %	± 0.30 µl	1
	·	·	50 µl	± 1.00 %	± 0.50 µl	± 0.40 %	± 0.2 µl	
			1000 µl	± 0.60 %	± 6 µl	± 0.20 %	± 2 µl	
E11111	100 – 1000 µl	5.0 µl	500 µl	± 0.70 %	± 3.50 µl	± 0.25 %	± 1.25 µl	1
	r	•	100 µl	± 2.00 %	± 2 µl	± 0.70 %	± 0.70 µl	
			5000 µl	± 0.50 %	± 25 µl	± 0.15 %	± 7.5 µl	
E11134	1000 – 5000 µl	50 µl	2500 µl	± 0.60 %	± 15 µl	± 0.30 %	± 7.5 µl	1
	•		1000 µI	± 0.70 %	± 7 µl	± 0.30 %	± 3 µl	



Premium Plus Multi Channel Pipettes

ABDOS Premium Plus Multi-Channel Pipette meets the highest needs in precision and accuracy – combined with ultimate ergonomics and increased flexibility with sophisticated blend of features and functionality.

These fully autoclavable 8-channel and 12-multichannel pipette is available for Standard 96-well plates.

Individual piston and Tip cone assemblies allow easy repair and maintenance.

It is easy to calibrate and maintain with tools supplied. Calibrated in accordance with ISO8655. The quality control includes the gravimetric testing with distilled water at 22°C.

It is supplied with operator manual that provides complete information on recalibration and maintenance of the pipette.



35 | Premium Plus 8-Channel Adjustable Multichannel Pipette

- Abdos Premium Plus Multi-channel Pipettes have a unique ergonomic design for comfortable finger support and convenient tip ejector design allows one-handed operation.
- The dispensing head of these pipettes rotate for optimum pipetting.
- The special compound material tip cone design allows visual seal verification and has excellent chemical resistance.
- · Individual piston and tip cone assemblies allow easy repair and maintenance.
- · Volume settings can be clearly read through digital display.
- · Abdos Premium Plus Multi-channel Pipettes are easy to calibrate and maintain with the tools supplied.
- These pipettes are designed to avoid repetitive strain injuries.
- All Abdos pipettes are supplied with operator manual that provides complete information on recalibration and maintenance of the pipettes.







				Maximum Permissible Systematic Error		Maximum Permissible Random Error		
Code	Capacity	Increment	Test Volume	Inaccuracy	Inaccuracy	Imprecision	Imprecision	No. / Case
			10 µl	± 1.50 %	± 0.15 µl	± 1.50 %	± 0.15 µl	
E11136	0.5 – 10 µl	0.1 µl	5 µl	± 2.50 %	± 0.125 µl	± 2.50 %	± 0.125 µl	1
			1 µl	± 4.00 %	± 0.04 µl	± 4.00 %	± 0.04 µl	
			50 µl	± 1.00 %	± 0.50 μl	± 0.50 %	± 0.25 µl	
E11137	5 – 50 µl	0.5 µl	25 µl	± 1.50 %	± 0.375 µl	± 1.00 %	± 0.25 µl	1
			5 μΙ	± 3.00 %	± 0.15 µl	± 2.00 %	± 0.10 µl	
			300 µl	± 0.70 %	± 2.10 µl	± 0.25 %	± 0.75 µl	
E11138	50 – 300 μl	5 µl	150 µl	± 1.00 %	± 1.50 µl	± 0.50 %	± 0.75 µl	1
	·	•	50 μl	± 1.50 %	± 0.75 µl	± 0.80 %	± 0.40 µl	

36 | Premium Plus 12-Channel Adjustable Multichannel Pipette







	Maximum Permissible		Maximum Permissible Systematic Error		Maximum Permissible Random Error		
Code	Test Volume Inaccuracy	Increment	Inaccuracy	Imprecision	Imprecision	No. / Case	
E11139	10 µl ± 1.50 % 5 µl ± 2.50 %	0.1 μΙ	± 0.15 μl ± 0.125 μl	± 1.50 % ± 2.50 %	± 0.15 µl ± 0.125 µl	1	
	1 µl ± 4.00 %		± 0.04 µl	± 4.00 %	± 0.04 µl		
E11140	50 µl ± 1.00 % 25 µl ± 1.50 %	0.5 µl	± 0.50 μl ± 0.375 μl	± 0.50 % ± 1.00 %	± 0.25 µl ± 0.25 µl	1	
	·		•		•		
E11141	150 µl ± 1.00 %	5 μΙ	± 1.50 µl	± 0.50 %	± 0.75 µl	1	
	5 μl ± 3.00 % 300 μl ± 0.70 %	·	± 0.15 μl ± 2.10 μl	± 2.00 % ± 0.25 %	± 0.10 µl ± 0.75 µl		

37 | Pipette Rack Stand, ACRYLIC

- · Holds five standard size pipettes.
- · Racks are mounted on their own stand.
- · Keeps working area or desk free from clutter.







38 | Pipette Rack Stand (Carsol Type), PP

- Holds Six standard size pipettes.
- The Carousel Stand rotates smoothly and comfortably.
- · Keeps working area or desk free from clutter.



Code	No. of Places	No. / Case
D70202	6	1



39 | Premium Electronic Pipette

- · Abdos Premium electronic pipette is fast, precise with an ergonomic design that is easy to use in laboratories.
- High accuracy, high performance stepper motor ensures accuracy and repeatability, eliminating manual pipetting errors.

 A motor driven digital control pipette with multi-function Pipetting, Mixing, Stepper and Dilution.
- · 2 buttons handle all operational settings.
- · Light weight, ergonomic design, small body dimension for easy handling that guarantees fatigue free pipetting.
- · Adjustable speeds for aspiration and dispensing.
- · Comprehensive range with easy programming.
- · Motor driven with build-in-error control improving pipetting precision and providing reliable results.
- Highly efficient lithium-ion battery offering long running time with each charge makes the Premium Electronic Pipette a work-horse during busy times in the laboratories.
- · Lower part is autoclavable.
- Reduces workload and improves the accuracy and precision.
- A bright LED display makes setting and reading easy, thus reducing or eliminating errors.
- User can Self-calibrate by limiting the pipette to a PC via USB connector.





Code	Capacity	Increment	Test Volume	Inaccuracy	Inaccuracy	Imprecision	Imprecision	No. / Case
E11161	0.5 - 10 µl	0.01 µl	10 µl	± 1.0 %	± 0.10 µl	0.05 *s.d µl	0.5 CV%	1
LIIIOI	0.0 10 μι	0.01 μι	1 μl	± 3.5 %	± 0.035 µl	0.03 *s.d µl	3.0 CV%	•
F11100	F	01	FO ::1	. 0.0 %	. 0.40l	0.15 *	0.2.0\/.	,
E11162	5 - 50 µl	0.1 µl	50 μl 5 μl	± 0.8 % ± 3.0 %	± 0.40 μl ± 0.15 μl	0.15 *s.d µl 0.125 *s.d µl	0.3 CV % 2.5 CV %	ı
E11163	30 - 300 µl	1 μΙ	300 μl 30 μl	± 0.6 % ± 3.0 %	± 1.8 µl ± 0.9 µl	0.6 *s.d µl 0.21 *s.d µl	0.2 CV % 0.7 CV %	1
				2.2.12				
E11164	100 – 1000 µI	5 µl	1000 µl	± 0.6 %	± 6.0 µl	2.0 *s.d µl	0.2 CV %	1
			100 µl	± 3.0 %	± 3.0 µl	0.6 *s.d µl	0.6 CV %	



PIPETTE TIPS, PP

WAFER VALUE ADDITIONS

Each wafer of the rack is printed with effective Volume Range and Lot Number with Product Code, making it easy to keep your work organized and ensure supplies are traceable.





Pipette Tips

Features

All Tips are manufactured from ultra pure USP Class VI certified virgin polypropylene to ensure the highest quality & confirming to US FDA 21 CFR. Free from heavy metals, natural rubber & inhibitory plasticizers.

Free from Bacteriostatic & Fungistatic property.

Superior leeching performance in its class assures contamination free results.

DNase, RNase & Pyrogen free.

Precise Graduation mark for error free pipetting.

Tips with High clarity for better visibility of samples.

Diamond polished moulds for an extremely hydrophobic & smooth surface to ensure lowest retention in its class.





ABDOS BEVELLED TIPS

Precise diamond polished with special treatment on bevelled orifice prevents smooth working & sample hold-up. Bevelled orifice prevents sample hang up and makes it easier to pipette-off the last drop of sample.

Bevelled tips prevent accidental damage of gel rupture during loading.

Perfect airlock grip on pipette by inner radial rings for accurate pipetting.



The Universal Tip collar fits all popular pipettes.

The use of multiple cavity tools guarantees high conformity within one batch. The automated moulding and assembling procedures carried out under validated clean-room conditions to eliminate contamination.

Thin-wall technology ensures perfect seal while reducing the loading and ejection forces.



ABDOS ULTRA-POINT TIPS

Ultra point orifice for precise work like gel loading & careful pipetting between space as small as 1 mm as in PAGE, electrophoresis & IEF.

Ultra clear transparency for two phase pipettng.



40 | Pipette Tips, Bulk in Resealable Bags, PP

- Bulk Micro Tips are offered in resealable zip lock bag.
- The micro Tips can be manually accumulated in empty boxes.
- The product is free from contamination and dust.
- · Abdos polyethylene pouches are recyclable.














Code	Capacity	Colour	No. / Case
P10115	0.1 - 10 µl (Graduated)	Natural	1000
P10137	0.1 - 10 µl Extended (Graduated)	Natural	1000
P10129	1 - 200 µl (Bevelled Graduated)	Yellow	1000
P10130	1 - 200 µl (Bevelled Graduated)	Natural	1000
P10101	1 - 200 µl (Ultra Point Tip Orifice)	Yellow	1000
P10105	1 - 200 µl (Ultra Point Tip Orifice)	Natural	1000
P10138	1 - 300 µl (Graduated)	Natural	1000
P10102	100 - 1000 µI	Blue	500
P10106	100 – 1000 µI	Natural	500
P10174	100 - 1000 µl XL (Graduated)	Natural	500
P10175	100 - 1250 µl (Graduated)	Natural	500



41 | Large Volume Pipette Tips, Bulk in Resealable Bags, PP

- The ergonomically optimized cone geometry provides the optimal pipette fit on the models from other manufacturers.
- Fine Graduations make visual checks of the pipetting volume even
















Code	Capacity	Colour	No. / Case
P10144	1 - 5 ml (Graduated)	Natural	100
P10145	1 - 10 ml (Graduated)	Natural	100



42 | PureRight™ Pipette Tips, Individually Wrapped, Sterile, PP

- Individually wrapped pipette tips are manufactured as per the sterile purity level.
- · Sterile individually wrapped tips have beed validated according to ISO 11137 SAL 10-6




















Code	Capacity	Colour	No. / Case
P10164	0.1 - 10 µl (Graduated)	Natural	400
P10165	0.1 - 10 µl (Extended Graduated)	Natural	400
P10161	1 - 200 µl (Bevelled Graduated)	Natural	400
P10166	1 - 300 µl (Graduated)	Natural	200
P10163	100 - 1000 µl	Natural	200
P10167	100 - 1000 µl XL (Graduated)	Natural	200
P10168	100 - 1250 µl (Graduated)	Natural	200
P10169	100 - 5000 µl (Graduated)	Natural	60
P10170	500 - 10000 µl (Graduated)	Natural	50



43 | Pipette Tips, Racked, PP

- Racked Micro Tips are offered in prefilled racks that don't require manual accumulation in empty boxes.
- · Polypropylene racks are very robust, sturdy with consistent and thick wall thickness.
- Racks are hinged with transparent lid & base providing excellent view inside the box.
- Racks are stackable. Reusable once empty.













11000	THEE THEE THEE TET O		
Code	Capacity	Colour	No. / Case
P10116	0.1 - 10 µl (Graduated)	Natural	10 Racks x 96 pcs
P10139	0.1 – 10 μl Extended (Graduated)	Natural	10 Racks x 96 pcs
P10140	1 - 200 μl (Bevelled Graduated)	Yellow	10 Racks x 96 pcs
P10141	1 - 200 μl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P10107	1 - 200 μl (Ultra Point Tip Orifice)	Yellow	10 Racks x 96 pcs
P10108	1 - 200 μl (Ultra Point Tip Orifice)	Natural	10 Racks x 96 pcs
P10142	1 - 300 μl (Graduated)	Natural	10 Racks x 96 pcs
P10109	100 - 1000 μΙ	Blue	10 Racks x 96 pcs
P10110	100-1000 μΙ	Natural	10 Racks x 96 pcs
P10155	100-1000 μl XL (Graduated)	Natural	10 Racks x 96 pcs
P10157	100-1250 µl (Graduated)	Natural	10 Racks x 96 pcs
P10159	100-5000 µl (Graduated)	Natural	6 Racks x 24 pcs
P10160	500-10000 μl (Graduated)	Natural	6 Racks x 24 pcs



44 | Pipette Tips, Sterile Racked, PP



















Code	Capacity	Colour	No. / Case
P10117	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs
P10147	0.1 – 10 μl Extended (Graduated)	Natural	10 Racks x 96 pcs
P10148	1 - 200 μl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P10149	1 - 200 µl (Bevelled Graduated)	Yellow	10 Racks x 96 pcs
P10111	1 - 200 µl (Ultra Point Tip Orifice)	Yellow	10 Racks x 96 pcs
P10112	1 - 200 µl (Ultra Point Tip Orifice)	Natural	10 Racks x 96 pcs
P10150	1 - 300 µl (Graduated)	Natural	10 Racks x 96 pcs
P10113	100-1000 μΙ	Blue	10 Racks x 96 pcs
P10114	100 - 1000 μΙ	Natural	10 Racks x 96 pcs
P10156	100-1000 µl XL (Graduated)	Natural	10 Racks x 96 pcs
P10158	100-1250 μl (Graduated)	Natural	10 Racks x 96 pcs
P10171	100-5000 µl (Graduated)	Natural	6 Racks x 24 pcs
P10178	500-10000 μl (Graduated)	Natural	6 Racks x 24 pcs



45 | Pipette Tips, Refill Pack, PP

- $\bullet\,$ Racked Micro Tips are offered in prefilled trays that can be directly loaded in the box.
- Easy to load and remove into boxes.
- Saves time and costs of manual accumulation in empty boxes.
- More Cost effective and economical than racked micro tips.
- · Fits Perfectly onto Abdos Micro Tip Box.
- 12 x 8 Array to align the contents in the box.
- Can be autoclaved when racked.
















IVD

Code	Capacity	Colour	No. / Case
P10118	0.1 - 10 µl (Graduated)	Natural	12 Refill Racks x 96 Pcs
P10152	1 - 200 µl (Bevelled Graduated)	Natural	10 Refill Racks x 96 Pcs
P10153	1 - 200 µl (Bevelled Graduated)	Yellow	10 Refill Racks x 96 Pcs
P10119	1 - 200 µl (Ultra Point Tip Orifice)	Yellow	10 Refill Racks x 96 Pcs
P10120	1 - 200 µl (Ultra Point Tip Orifice)	Natural	10 Refill Racks x 96 Pcs
P10154	1 - 300 µl (Graduated)	Natural	10 Refill Racks x 96 Pcs
P10176	100-1000 XL μl (Graduated)	Natural	6 Refill Racks x 96 Pcs
P10177	100-1250 µl (Graduated)	Natural	6 Refill Racks x 96 Pcs



LAST DROP™ Low Retention

Pipette Tips Features

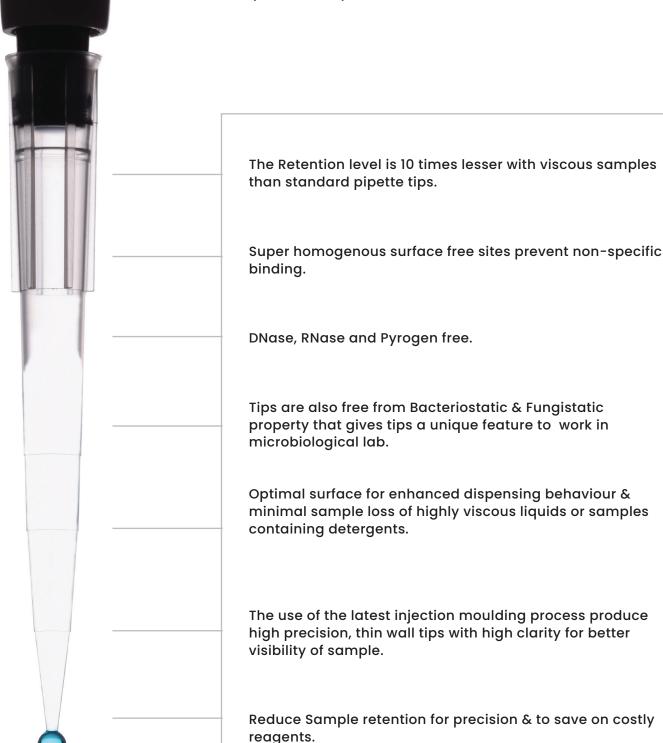


All tips are manufactured from ultrapure USP Class VI certified, Virgin PP (Polypropylene) to ensure the highest quality. Free from heavy metals, natural rubber and inhibitory plasticizers.

MATERIAL & METHOD

- 200µl Last Drop pipette tips were compared with other low retention tips in combination with an electronic pipette, were used to aspirate & dispense 100µl of Malachite Green, Methylene Blue, Glycerol & Titron-X (liquid detergent) at a constant pipetting speed.
- Residual in the pipette were washed out by repeated rinsing with 200µl water into cuvette and compared photometrically. The average values established are shown in the table.

COMPARISON CHART

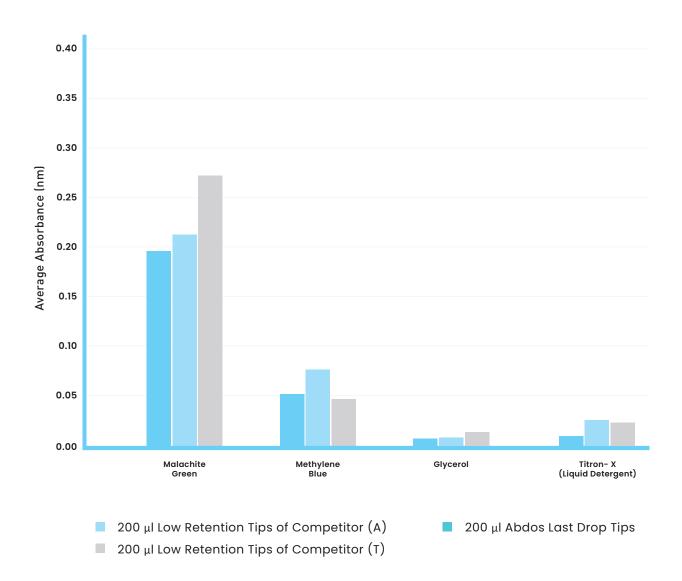

Result: Abdos Last Drop Pipette Tips clearly reduce sample loss. As seen above in the graph, it clearly indicates that Abdos Tips retained least amount of residue and saves on costly reagents.

46 | Last Drop™ Low Retention Pipette Tips, Bulk in Resealable Bags, PP

- Bulk Last Drop™ Micro Tips are offered in resealable zip lock bag.
- Tips can be manually accumulated in empty boxes.
- The product is free from contamination and dust.
- Abdos polyethylene pouches are recyclable.














Code	Capacity	Colour	No. / Case
P10001	0.1 - 10 µl (Graduated)	Natural	1000
P10002	0.1 - 10 µl Extended (Graduated)	Natural	1000
P10003	1 - 200 µl (Bevelled Graduated)	Natural	1000
P10004	1 - 200 µl (Ultra Point Tip Orifice)	Natural	1000
P10005	1 - 300 µl (Graduated)	Natural	1000
P10006	100 - 1000 μl	Natural	500
P10007	100 - 1000 μl XL (Graduated)	Natural	500
P10008	100 - 1250 µl (Graduated)	Natural	500



47 | PureRight™ Last Drop Low Retention Pipette Tips, Individually Wrapped, Sterile, PP

- Individually wrapped pipette tips are manufactured as per the sterile purity level.
- ullet Sterile individually wrapped tips have beed validated according to ISO 11137 SAL 10^{-6}




















Code	Capacity	Colour	No. / Case
P10010	0.1 - 10 μl (Graduated)	Natural	400
P10011	0.1 - 10 μl Extended (Graduated)	Natural	400
P10012	1 - 200 µl (Bevelled Graduated)	Natural	400
P10013	1 - 300 µl (Graduated)	Natural	200
P10014	100 - 1000 μΙ	Natural	200
P10015	100 - 1000 μl XL (Graduated)	Natural	200
P10016	100 - 1250 μl (Graduated)	Natural	200

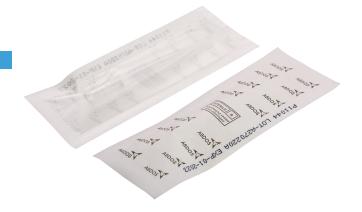

48 | Last Drop™ Low Retention Pipette Tips, Racked, PP

- Racked Last Drop™ Micro Tips are offered in prefilled racks that do not require manual accumulation in empty boxes.
- Polypropylene racks are very robust, sturdy with consistent and thick wall thickness.
- · Can be used for repeat autoclaving.
- · Racks are hinged with transparent lid & base providing excellent view inside the box.
- · Racks are stackable.
- · Reusable once empty.













Code	Capacity	Colour	No. / Case
P10020	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs
P10021	0.1 – 10 µl Extended (Graduated)	Natural	10 Racks x 96 pcs
P10022	1 - 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P10023	1 - 200 μl (Ultra Point Tip Orifice)	Natural	10 Racks x 96 pcs
P10024	1 - 300 µl (Graduated)	Natural	10 Racks x 96 pcs
P10025	100-1000 μΙ	Natural	10 Racks x 96 pcs
P10026	100 - 1000 μl XL (Graduated)	Natural	10 Racks x 96 pcs
P10027	100 - 1250 μl (Graduated)	Natural	10 Racks x 96 pcs



49 | Last Drop™ Low Retention Pipette Tips, Sterile Racked, PP





















Code	Capacity	Colour	No. / Case
P10040	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs
P10041	0.1 – 10 μl Extended (Graduated)	Natural	10 Racks x 96 pcs
P10042	1 - 200 μl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P10043	1 - 200 μl (Ultra Point Tip Orifice)	Natural	10 Racks x 96 pcs
P10044	1 - 300 μl (Graduated)	Natural	10 Racks x 96 pcs
P10045	100 - 1000 μΙ	Natural	10 Racks x 96 pcs
P10046	100 - 1000 µl XL (Graduated)	Natural	10 Racks x 96 pcs
P10047	100 - 1250 µl (Graduated)	Natural	10 Racks x 96 pcs



50 | Last Drop™ Low Retention Pipette Tips, Refill Pack, PP

- Racked Micro Tips are offered in prefilled trays that can be directly loaded in the box.
- · Easy to load and remove into boxes.
- Saves time and costs of manual accumulation in empty boxes.
- Fits Perfectly onto Abdos Micro Tip Box.
- 12 x 8 Array to align the contents in the box.
- · Can be autoclaved when racked.















Code Capacity P10060 0.1 - 10 µl (Graduated) 12 Refill Racks x 96 pcs Natural P10061 1 - 200 μl (Bevelled Graduated) 10 Refill Racks x 96 pcs Natural P10062 1 - 200 μl (Ultra Point Tip Orifice) Natural 10 Refill Racks x 96 pcs P10063 $1-300~\mu I$ (Graduated) Natural 10 Refill Racks x 96 pcs P10064 100 - 1000 μl XL (Graduated) 6 Refill Racks x 96 pcs Natural P10065 100 - 1250 μl (Graduated) 6 Refill Racks x 96 pcs Natural



SUPER™ Filter Tips

Features

Universal fit, leak proof fitment. Proprietary polyethylene super filter provides aerosol and aqueous liquid by-pass prevention in overpipetting hereby preventing cross All Tips are manufactured from ultra pure USP Class VI certified contamination. virgin polypropylene to ensure the highest quality. Free from, heavy metals natural rubber & inhibitory plasticizers. Hydrophobic filter that is additive free and does not absorb samples. Superior leeching performance in its class assures contamination Precise graduation mark for error free results. free pipetting. Precise safety gap between liquid Diamond polished moulds for an & filter for electronic pipette and extremely hydrophobic & smooth reverse pipetting. surface to ensure lowest retention in its class. 5 Stage quality control procedures ensure 100% quality & performance. The use of the latest injection All Abdos Tips are DNase, RNase & moulding processes produces high Pyrogen free. precision thin wall tips with high clarity for better visibility of samples.

Best Suited for Biological application.

Abdos Filter is 100% pure porous PE. It makes Recovery of Samples from Wetted, Filtered without Contamination.

Non Cytotoxic (ISO 10993-5 MRM, Minimal Essential Media Elution, GLP Compliant). 99.9% Bacterial Aerosol Filtration Efficiency (BFE), (ASTM F21012).

Non Hemolytic (Modified ASTM F 756-08 Hemolysis Direct Contact GLP with Human Blood).


Inert, Hydrophobic Filter does not trap or block the liquid.

*Note: Abdos SUPER™ filter tips are recomended in the WHO & ICMR approved Covid-19 testing protocol.

ABDOS SUPER™ FILTER PREVENTS BOTH LIQUID & AEROSOL PASSING THROUGH THE FILTER

Case Study:

Contamination is one of the major issue we faced while working in our labs. Majorly contamination is been carried out while pipetting the samples from one source to the other; therefore Abdos offers Super filter that prevents both Liquid & Aerosol passing through the filter, thus making pipette shaft contamination free.

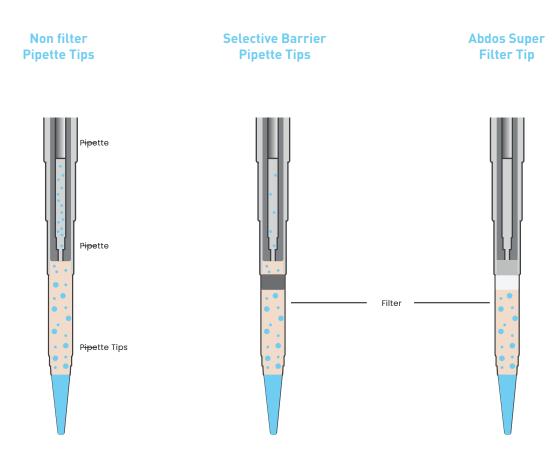

May lead to contamination of Most filter pipette tips do not act as a lose your precious samples.

the pipette as there is no barrier barrier to both liquid and Aerosol. The for Liquid or Aerosol to prevent Pores of the filter act as a selective entering into the shaft. Thus can barrier thereby contaminating the affect your experiment & you may pipette. While in other filter pipette tips, the liquid touches the filter, the filter becomes wet and locks. Hence, possibility of sample recovery is not possible.

Abdos Super filter prevents Aerosol passing through & aqueous liquid by-pass prevention in over-pipetting. Thus makes it unique in preventing the contamination.

Proprietary Pure Porous Hydrophobic PE filter helps us to recover contamination free samples from wetted filter and does not trap or block the liquid into the filter.

51 | Filter Pipette Tips, Bulk in Resealable Bags, PP

- Bulk Filter Pipette Tips are offered in resealable zip lock bag.
- Tips can be manually accumulated in empty boxes.
- The product is free from contamination and dust.
- Abdos polyethylene pouches are recyclable.
















Code	Capacity	Colour	No. / Case
P11001	0.1 - 10 µl (Graduated)	Natural	1000
P11002	0.1 - 10 µl Extended (Graduated)	Natural	1000
P11003	1 - 20 µl (Bevelled Graduated)	Natural	1000
P11004	1 - 100 µl (Bevelled Graduated)	Natural	1000
P11005	1 - 200 µl (Bevelled Graduated)	Natural	1000
P11006	1 - 300 µl (Graduated)	Natural	1000
P11007	100 - 1000 µI	Natural	500
P11015	100 - 1000 µl XL (Graduated)	Natural	500
P11016	100 - 1250 µl (Graduated)	Natural	500



52 | Large Volume Filter Pipette Tips, Bulk in Resealable Bags, PP

- · The ergonomically optimized cone geometry provides the optimal pipette fit on the models from other manufacturers.
- · Fine Graduations make visual checks of the pipetting volume even easier.



P1 P1
















ode	Capacity	Colour	No. / Case	
11017	100 - 5000 µl (Graduated)	Natural	100	
11018	500 - 10000 µl (Graduated)	Natural	100	



53 | PureRight™ Filter Pipette Tips, Individually Wrapped, Sterile, PP

- PureRight™ Individually Filter Tips are offered in sealed proof packaging.
- These tips are gamma radiated.
- The product is free from contamination and dust.
- · Every piece comes with infographics of Lot & Expiry details.
- Abdos polyethylene pouches are recyclable.


















Code	Capacity	Colour	No. / Case
P11008	0.1 - 10 µl (Graduated)	Natural	400
P11009	0.1 - 10 µl Extended (Graduated)	Natural	400
P11010	1 - 20 µl (Graduated)	Natural	400
P11011	1 - 100 µl (Graduated)	Natural	400
P11012	1 - 200 µl (Graduated)	Natural	400
P11013	1 - 300 µl (Graduated)	Natural	200
P11014	100 - 1000 µI	Natural	200
P11019	100 - 1000 µl XL (Graduated)	Natural	200
P11049	100 - 1250 µl (Graduated)	Natural	200
P10099	100 - 5000 µl (Graduated)	Natural	60
P10100	500 - 10000 µl (Graduated)	Natural	50

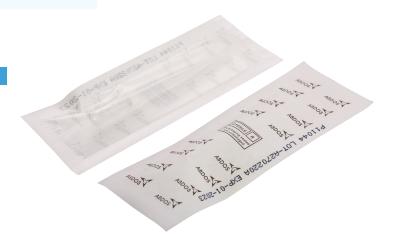

54 | Filter Pipette Tips - Racked, PP

- · Racked Filter Tips are offered in prefilled racks that do not require manual accumulation in empty boxes.
- Polypropylene racks are very robust, sturdy with consistent and thick wall thickness.
- Racks are hinged with transparent lid & base providing excellent view inside the box.
- · Racks are stackable.
- Reusable once empty.











Code	Capacity	Colour	No. / Case	
P11020	0.1 - 10 µl (Graduated)	Natural	10 Racks x 96 pcs	
P11022	0.1 - 10 μl Extended (Graduated)	Natural	10 Racks x 96 pcs	
P11024	1-20 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	
P11026	1-50 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	
P11028	1-100 μl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	
P11032	1 - 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	
P11034	1 - 300 µl (Graduated)	Natural	10 Racks x 96 pcs	
P11036	100-1000 μΙ	Natural	10 Racks x 96 pcs	
P11038	100 - 1000 μl (Graduated)	Natural	10 Racks x 96 pcs	
P11039	100 - 1250 µl (Graduated)	Natural	10 Racks x 96 pcs	
P11030	100 - 5000 µl (Graduated)	Natural	6 Racks x 24 pcs	
P11031	100 - 10000 ul (Graduated)	Natural	6 Racks x 24 pcs	



55 | Filter Pipette Tips, Sterile Racked, PP



















Code	Capacity	Colour	No. / Case
P11021	0.1 - 10 µl (Graduated)	Natural	10 Racks x 96 pcs
P11023	0.1 - 10 μl Extended (Graduated)	Natural	10 Racks x 96 pcs
P11025	1-20 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11027	1-50 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11029	1-100 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11033	1 - 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11035	1 - 300 µl (Graduated)	Natural	10 Racks x 96 pcs
P11037	100-1000 µl	Natural	10 Racks x 96 pcs
P11047	100 - 1000 µI (Graduated)	Natural	10 Racks x 96 pcs
P11048	100 - 1250 µI (Graduated)	Natural	10 Racks x 96 pcs
P10172	100 - 5000 µl (Graduated)	Natural	6 Racks x 24 pcs
P1∩173	100 - 10000 ut (Graduated)	Natural	6 Packs v 24 ncs



56 | Refill Filter Pipette Tips, Sterile PP

- Refill filter Tips are offered in prefilled tray that can be directly loaded in the box.
- Easy to load and remove into box.
- Saves time and costs of manual accumulation in empty box.
- More Cost effective and economical.
- · Each Wafer comes in Individual wrapping.



















Code	Capacity	Colour	No. / Case
P11092	0.1 - 10 µl (Graduated)	Natural	10 refill pack x 96 pcs
P11093	0.1 - 10 µl Extended (Graduated)	Natural	10 refill pack x 96 pcs
P11094	1 - 20 µl (Graduated)	Natural	10 refill pack x 96 pcs
P11095	1 - 100 µl (Graduated)	Natural	10 refill pack x 96 pcs
P11096	1 - 200 µl (Graduated)	Natural	10 refill pack x 96 pcs
P11097	1 - 300 µl (Graduated)	Natural	10 refill pack x 96 pcs
P11098	100 - 1000 µl	Natural	10 refill pack x 96 pcs
P11099	100 - 1000 µl XL (Graduated)	Natural	10 refill pack x 96 pcs
P11100	100 - 1250 µl (Graduated)	Natural	10 refill pack x 96 pcs



LAST DROP™ Filter Tips

Features

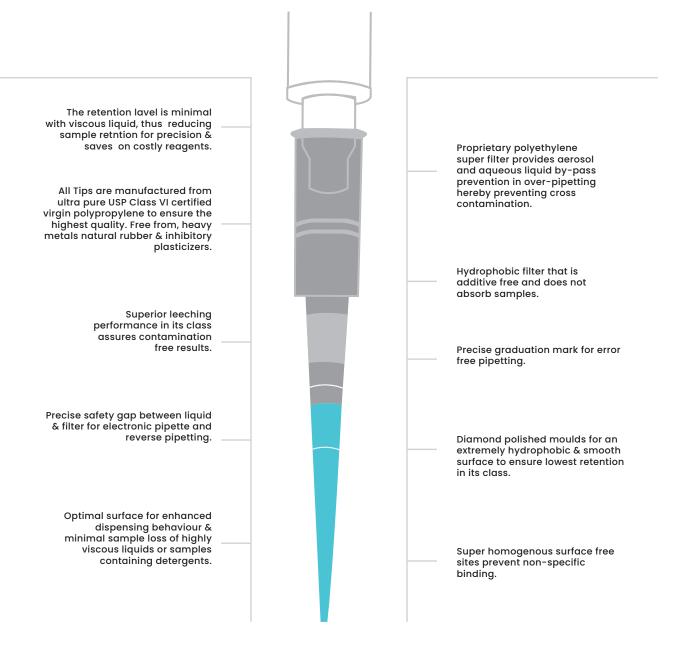

Best Suited for Biological application.

Abdos Filter is 100% pure porous PE. It makes Recovery of Samples from Wetted, Filtered without Contamination.

Non Cytotoxic (ISO 10993-5 MRM, Minimal Essential Media Elution, GLP Compliant).

99.9% Bacterial Aerosol Filtration Efficiency (BFE), (ASTM F21012).

Non Hemolytic (Modified ASTM F 756-08 Hemolysis Direct Contact GLP with Human Blood).


Inert, Hydrophobic Filter does not trap or block the liquid.

57 | Last Drop™, Low Retention Filter Pipette Tips, Bulk in Resealable Bags, PP

- Bulk Last Drop™ Filter Tips are offered in resealable zip lock bag.
- The micro Tips can be manually accumulated in empty
- The product is free from contamination and dust.
- Abdos polyethylene pouches are recyclable.



Code	Capacity	Colour	No. / Case
P11050	0.1 - 10 μl (Graduated)	Natural	1000
P11051	0.1 - 10 μl (Extended Graduated)	Natural	1000
P11052	1 - 20 µl (Bevelled Graduated)	Natural	1000
P11053	1 - 100 µl (Bevelled Graduated)	Natural	1000
P11054	1 - 200 μl (Bevelled Graduated)	Natural	1000
P11055	1 - 300 μl (Graduated)	Natural	1000
P11056	100-1000 μl (Bulk)	Natural	500
P11057	100 - 1000 µl (Graduated)	Natural	500
P11058	100 - 1250 µl (Graduated)	Natural	500
P11058	100 - 1250 µl (Graduated)	Natural	500

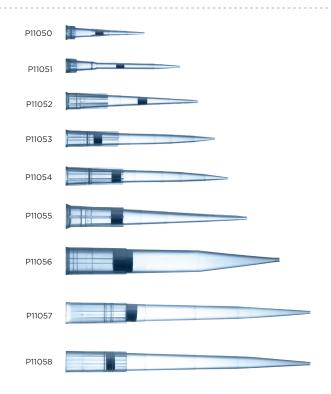

58 | PureRight™ Last Drop Low Retention Filter Pipette Tips, Individually Wrapped, Sterile, PP

- · Individually Filter Tips are offered in sealed proof packaging.
- These tips are gamma radiated.
- The product is free from contamination and dust.
- · Every piece comes with infographics of Lot and Expiry
- · Abdos polyethylene pouches are recyclable.



















Code	Capacity	Colour	No. / Case
P11040	0.1 - 10 µl (Graduated)	Natural	400
P11041	0.1 - 10 μl Extended (Graduated)	Natural	400
P11042	1 - 20 μl (Graduated)	Natural	400
P11043	1 - 100 μl (Graduated)	Natural	400
P11044	1 - 200 µl (Graduated)	Natural	400
P11045	1 - 300 µl (Graduated)	Natural	200
P11046	100 - 1000 µl (Graduated)	Natural	200
P11070	100 - 1000 µl XL, (Graduated)	Natural	200
P11071	100 - 1250 µl, (Graduated)	Natural	200



59 | Last Drop™, Low Retention Filter Pipette Tips - Racked, PP

- $\bullet \ \ \text{Racked Last Drop}^{\text{\tiny{TM}}} \ \text{Filter Tips are offered in prefilled racks that do not require manual accumulation in empty boxes.}$
- Polypropylene racks are very robust, sturdy with consistent and thick wall thickness.
- Racks are hinged with transparent lid & base providing excellent view inside the box.
- · Racks are stackable. Reusable once empty.













Code	Capacity	Colour	No. / Case
P11060	0.1 - 10 µl (Graduated)	Natural	10 Racks x 96 pcs
P11062	0.1 - 10 μl Extended (Graduated)	Natural	10 Racks x 96 pcs
P11064	1 - 20 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11066	1 - 50 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11068	1 - 100 μl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11072	1 - 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11074	1 - 300 µl (Graduated)	Natural	10 Racks x 96 pcs
P11076	100-1000 μΙ	Natural	10 Racks x 96 pcs
P11078	100 - 1000 μl (XL) (Graduated)	Natural	10 Racks x 96 pcs
P11080	100 - 1250 µl (Graduated)	Natural	10 Racks x 96 pcs



60 | Last Drop™, Low Retention Filter Pipette Tips - Sterile Racked, PP

















Code	Capacity	Colour	No. / Case
P11061	0.1 - 10 μl (Graduated)	Natural	10 Racks x 96 pcs
P11063	0.1 - 10 μl Extended (Graduated)	Natural	10 Racks x 96 pcs
P11065	1 - 20 μl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11067	1 - 50 μl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11069	1 - 100 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11073	1 - 200 μl (Bevelled Graduated)	Natural	10 Racks x 96 pcs
P11075	1 - 300 µl (Graduated)	Natural	10 Racks x 96 pcs
P11077	100-1000 μΙ	Natural	10 Racks x 96 pcs
P11079	100 - 1000 µI (XL) (Graduated)	Natural	10 Racks x 96 pcs
P11081	100 - 1250 µl (Graduated)	Natural	10 Racks x 96 pcs



61 | Last Drop™, Low Retention Refill Filter Pipette Tips - Sterile, PP

- Refill filter Tips are offered in prefilled tray that can be directly loaded in the box.
- Easy to load and remove into box.
- · Saves time and costs of manual accumulation in empty box.
- · More Cost effective and economical.



















Code	Capacity	Colour	No. / Case
P11082 P11083 P11084 P11085 P11086 P11087 P11088 P11089 P11090	0.1 - 10 µl (Graduated) 0.1 - 10 µl Extended (Graduated) 1 - 20 µl (Graduated) 1 - 100 µl (Graduated) 1 - 200 µl (Graduated) 1 - 300 µl (Graduated) 100 - 1000 µl 100 - 1000 µl XL (Graduated)	Natural Natural Natural Natural Natural Natural Natural Natural	10 refill pack x 96 pcs



62 | Empty Micro Tip Box, PP

- Abdos Micro Tip Boxes are robust with consistent wall thickness for repetitive use in single and multi channel pipette.
- Abdos Micro Tip Box can accommodate Abdos Micro Tips and the tip holding spaces are uniformly placed to facilitate easy use in multi channel pipette.
- These boxes are stackable.
- Transparent top cover provides an excellent view of the Micro Tips inside the box.
- Manufactured in high quality polypropylene.
- All Tip Boxes contain 96 Tip holes.
- · Can be autoclaved.





Code	Tip Capacity	Places	LxWxH	No. / Case
P20101	0.1 - 10 μΙ	96	126 x 93 x 70 mm	6
P20102	1 - 200 μΙ	96	127 x 93 x 70 mm	6
P20104	1 - 300 μΙ	96	127 x 93 x 77 mm	6
P20103	100 - 1000 μΙ	96	146 x 99 x 97 mm	6
P20105	100 - 1000 μl (XL)/ 1250	0 μΙ 96	146 x 99 x 120 mm	6
P20106	100 - 5000 μΙ	24	125 x 92 x 134 mm	3
P20107	500 - 10000 μΙ	24	125 x 92 x 172 mm	3



63 | Reagent Reservoir, HIPS

- Unique "trough within a trough" maximizes reagent recovery.
- Convenient pour-off spouts on all four corners.
- · A wide base provides stability and avoids spills.
- Graduated marks on inside wall.
- Superior design provides stronger sidewalls.
- 100ml reagent reservoir has capacity for extended multi-channel pipetting into microtiter plates.
- This design allows ample clearance for all types of pipettes.

Code	Capacity	No. / Case
P10501	25 ml	10
P10503	100 ml	10



ABDOS TIPS & LAST DROP PIPETTE TIPS

COMPATIBILITY CHART

	Pipettor Brand	/ Make		Abdos Single					Prem		s i Plus anne				(Ab Sing		Fixe Char							mium annel)		Abdos mium lti Cha	Plus
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.5 - 10 µl	2-20 µl	10-100 µԼ	20-200µԼ	100-1000 µl	0.5 - 10 มใ	2-20 µl	10-100 µl	20-200 µl	100-1000 µl	5 μί	10 µl	20 µl	25 µl	50 µl	100 μl	200 րլ	250 μί	500 µl	1000 µl	0.5 - 10 µl	5 - 50 μl	50-300 μl	0.5 - 10 มใ	5 - 50 μl	50-300 րԼ
P10115	P10001	0.2 - 10 μl	V					V					V	V									V			V		
P10137	P10002	0.2 - 10 μl	V					V					V	V									V			V		
P10129	-	2 - 200 µl		V	V	V			V	V	V				V	V	V	V	V	V				V	V		V	V
P10130	P10003	2 - 200 µl		V	V	V			V	V	V				V	V	V	V	V	V				V	V		V	V
P10101	-	2 - 200 µl		V	V	V			V	V	V				V	V	V	V	V	V				V	V		V	V
P10105	P10004	2 - 200 µl		V	V	V			V	V	V				V	V	V	V	V	V				V	V		V	V
P10138	P10005	2 - 300 µl		V	V	V			V	V	V				V	V	V	V	V	V				V	V		V	V
P10102	-	100 - 1000 μl					V					V									V	V						
P10106	P10006	100 - 1000 μl					V					V									V	V						

	Pipettor Brand/	Make		iohit igle c				hit el ti cha		1			Line		Lin	iohit i e® (r hann	nulti			it Pr e ch					roline annel)	(hit e Sing hann	
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.2-10µl	5-120µԼ	10-300µԼ	50-1000µl	0.2-10µl	5-120µl	10-300րԼ	0.5-10µԼ	2-20µl	10-100րլ	20-200րԼ	100-1000µl	0.5-10µԼ	5-100µԼ	30-300µԼ	0.2-10µԼ	5-100µԼ	10-250µԼ	10-500µԼ	50-1000µl	0.2-10µԼ	5-100µԼ	25-250µԼ	0.2-10µԼ	5-100րԼ	50-1200µԼ
P10115	P10001	0.2 - 10 μl	V				V			V					V			V					V			V		
P10137	P10002	0.2 - 10 µl	V				V			V					V			V					V			V		
P10129	-	2 - 200 µl		V								V	V			V			V					V			V	
P10130	P10003	2 - 200 µl		V								V	V			V			V					V			V	
P10101	-	2 - 200 µl		V								V	V			V			V					V			V	
P10105	P10004	2 - 200 µl		V								V	V			V			V					V			V	
P10138	P10005	2 - 300 µl		V	V				V			V	V			V	V		V	V				V	V		V	
P10102	-	100 - 1000 μl				V								V								V						
P10106	P10006	100 - 1000 μl				V								V								V						

	Pipettor Brand/	Make		Biohit ulti c				ele	ctro	rolin nics hann			iohit electi Iulti c	onics	5				Prol char	ine inel)			iohit Iulti d				Biohi roline l igle ch	Plus
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.2-10µl	5-100րԼ	50-1200µl	25-250 µl	0.2-10µl	5-100µԼ	10-250µԼ	50-1000µl	50-1200µl	0.2-10րԼ	5-100µԼ	10-250µԼ	50-1200µl	0.2-10µԼ	5-50µԼ	10-100րև	50-200µl	10-250µl	200-1000µլ	0.5-10µl	5-50µԼ	50-250µԼ	50-300րև	0.5-10µԼ	20-200µԼ	100-1000 או
P10115	P10001	0.2 - 10 μl	V				V					V				V						V				V		
P10137	P10002	0.2 - 10 μl	V				V					V				V						V				V		
P10129	-	2 - 200 µl		V				V					V				^	V	V				V				V	
P10130	P10003	2 - 200 µl		V				V					V				V	V	V				V				V	
P10101	-	2 - 200 µl		V				V					V				V	V	V				V				V	
P10105	P10004	2 - 200 µl		V				V					V				V	V	V				V				√	
P10138	P10005	2 - 300 µl		V		V		V	V				V	V			V	V	V	V			V	√	V		V	
P10102	-	100 - 1000 μl								V											V							V
P10106	P10006	100 - 1000 μι								V											V							V

	D:	/ Malea						Br	and ⁻	Trans	ferp	ette									Br	and E	Elect	ronic	S		
	Pipettor Brand/	маке			5	Single	e Cha	nnel						Mult	i Cha	anne	ι			Singl	le Cha	annel		М	ulti C	hanr	nel
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.1-1µԼ	0.5-10µԼ	2-20µl 'ULTRA MICRO'	2-20µl	5-50µl	10-100րլ	20-200µԼ	25-250µԼ	100-1000µl	0.5–10µԼ	2-20µl	2.5-25µl	5-50µԼ	10-100րև	20-200µԼ		0.5-10µԼ	10-100րև	20-200µւ	30-300µl	100-1000µl	0.5-10µԼ	5-100µԼ	10-200րև	15-300µԼ
P10115	P10001	0.2 - 10 μl		V								V							V					V			
P10137	P10002	0.2 - 10 μl		V								V							V					V			
P10129	-	2 - 200 µl					V	V	V						V	V	V			V	V				V	V	
P10130	P10003	2 - 200 µl					V	V	V						V	V	V			V	V				V	V	
P10101	-	2 - 200 µl					V	V	V						V	V	V			V	V				V	V	
P10105	P10004	2 - 200 µl					V	V	V						V	V	V			V	V				V	V	
P10138	P10005	2 - 300 µl					V	V	V	V					V	V	V	V		V	V	V			V	V	V
P10102	-	100 - 1000 μl									V												V				
P10106	P10006	100 - 1000 μl									V												V				

F	Pipettor Brand/	Make			Bra	nd Ti	ransi	ferp	ette	S					Ca	pp A	ero				Gilso	on P	ipetr	man		Gils Pipetma	
				S	ingle C	hanr	nel		Мι	ulti C	han	nel	Sin	gle C	hanr	nel /	Multi	Char	nnel		Sing	gle (Chan	nel		Multi Ch	iannel
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.1-1µl	0.5-10µԼ	2-20µl 'ULTRA MICRO'	10-100րԼ	20-200րե	100-1000µl	0.5-10µԼ	10-100րԼ	20-200րԼ	30-300µl	0.2-2µl	0.5-10µԼ	5-50µԼ	10-100րլ	25-200µԼ	50-300µl	100-1000րլ	0.2-2µԼ	1-10µl	2-20µl	20-100րԼ	50-200µl	200-1000µl	1-20µԼ	20-300µԼ
P10115	P10001	0.2 - 10 μl		V					V				V	V						V	V						
P10137	P10002	0.2 - 10 μl		V					V				V	V						V	V						
P10129	-	2 - 200 µl				V	V			V	V					V	V						V	V			
P10130	P10003	2 - 200 µl				V	V			V	V					V	V						V	V			
P10101	-	2 - 200 µl				V	V			V	V					V	V						V	V			
P10105	P10004	2 - 200 µl				V	V			V	V					V	V						V	V			
P10138	P10005	2 - 300 µl				V	V			V	٧	V				V	V	V					V	V			V
P10102	-	100 - 1000 μl						V											V						V		
P10106	P10006	100 - 1000 μl						V											V						V		

F	Pipettor Brand /	Make		G	ilson Pi	petmai	n Ultra		Gil	son Con	cept	Gil	son Conc	ept		Gilso	n Neo	
					Singl	e Chan	nel		Sin	gle Cha	nnel	Мі	ulti Chanı	nel		Single	Channe	
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.2-2µԼ	1–10µԼ	2-20µԼ	20-100µԼ	20-200µԼ	200-1000µԼ	0.5-10µԼ	5-100µԼ	20-300µԼ	1-10րԼ	10-100րև	30-300µl	0.2-2µԼ	1-10րԼ	20-100µԼ	100-1000րլ
P10115	P10001	0.2 - 10 µl		V					V			V				V		
P10137	P10002	0.2 - 10 µl		V					V			V				V		
P10129	-	2 - 200 µl				√	V			V			V				V	
P10130	P10003	2 - 200 µl				√	√			V			V				V	
P10101	-	2 - 200 µl				V	V			V			V				V	
P10105	P10004	2 - 200 µl				√	V			V			V				V	
P10138	P10005	2 - 300 µl				V	V			V	V		V	V			V	
P10102	-	100 - 1000 μl						V										V
P10106	P10006	100 - 1000 μl						V										V

F	Pipettor Brand/	Make	١	/istal	ab O	vati	on Q	S		Vista	alab (Ovati	on M		Vist	talab	Ovati	on E		Eppen	dorf	Refe	rence	:			endo roni	
				Sin	gle C	Char	nel			Sir	ngle (Chan	nel		M	1ulti (Chanr	nel		Sing	gle C	hanr	iel					
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.2-2µL	1-10µL	2-20µL	10-100µL	20-200µL	100-1000µL	0.2-2µL	1-10µL	2-20µL	10-100µL	20-200µL	100-1000µL	0.5-20µL	5-250µL	2-125µL	25-1250µL	0.1-10µl	"0.1-10µl 'ULTRA MICRO'"	2-20µԼ	10-100րլ	20-200µԼ	100-1000րլ	0.5-10µl	5-100µԼ	2-200µԼ	50-1000µԼ
P10115	P10001	0.2 - 10 μl	V	V	V				V	V	V				V				V		V							
P10137	P10002	0.2 - 10 μl	V	V	V				V	V	V				V				V		√							
P10129	-	2 - 200 µl				V	V					V	V			V	V					V	V			V	V	
P10101	-	2 - 200 µl				V	V					V	V			V	V					V	V			V	V	
P10105	P10004	2 - 200 µl				V	V					V	V			V	V					V	V			V	V	
P10138	P10005	2 - 300 µl				V	V					V	V			V	V					V	V			V	V	
P10102	-	100 - 1000 μl						V						V				V						V				V
P10106	P10006	100 - 1000 μl						√						√				√						√				√

F	Pipettor Brand/	Make	E	pper			_	า			·· <u> </u>	ndort	_			'Ther					Fin	Thern	tte"			pact2"
				Sin	gle (Chan	nel			Μι	ulti C	hanr	nel			Sir	ngle C	Chani	nel		Mul	ti Cha	nnel		s/m	C
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.1-2.5µl				0.5-10µԼ	5-100µԼ	50-100µԼ	0-300րԼ	30-300µl	50-1200µl	0.2-10µԼ	0.5-10µԼ	1407-9	40-200րլ	1000-1000µԼ	200-1000µԼ	0.1-10µl	10-100րլ	30-300µl	2-125µԼ	2-20µԼ	15-1250µԼ		
P10115	P10001	0.2 - 10 μl		V	V				V						V	V					V					
P10137	P10002	0.2 - 10 μl		V	V				V						V	V					V					
P10129	-	2 - 200 µl				V	V			V	V							V				V		V		
P10101	-	2 - 200 µl				V	V			>	V							V				V		V		
P10105	P10004	2 - 200 µl				V	V			>	V							V				V		V		
P10138	P10005	2 - 300 µl				V	V			V	V	V	V					V				V	V	V		
P10102	-	100 - 1000 μl						V						√*					V	V						
P10106	P10006	100 - 1000 μl						V						√*					V	V						

ſ	Pipettor Brand/	Make		Labr	net L	abp	ette		La	bnet	Labp	ette			Labı	net B	ioPe	tte E				1"		yo / 0: :hmat		
				Sing	gle C	Chan	nel		М	lulti	Chan	nel	Si	ngle	Chani	nel	١	1ulti	Chani	nel	Sin	gle Cl	nanne	l & M	ulti Cha	annel
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.1-2µl	0.5-10µl 2-20µl 10-100µl 20-200µl 100-1000µl						5-50µԼ	20-200րԼ	50-300µl	0.5-10µԼ	2-20µԼ	10-200րԼ	100-1000µԼ	0.5-10µԼ	2-20µl	10-200µԼ	100-1000րլ	0.5-10µԼ	2-20µԼ	10-50µԼ	10-100µԼ	20-200µԼ	100-1000րլ
P10115	P10001	0.2 - 10 µl	V	V					V				V				V				V					
P10137	P10002	0.2 - 10 μl	V	V					V				V				V				V					
P10129	-	2 - 200 µl				V	√				V				V				V					V	V	
P10101	-	2 - 200 µl				V	V				V				V				V					V	V	
P10105	P10004	2 - 200 µl				V	V				V	V			V				V					V	V	
P10138	P10005	2 - 300 µl				V	V				V	V			V				V					V	V	
P10102	-	100 - 1000 μl						V								V				V						√
P10106	P10006	100 - 1000 μl						√								√				√						√

ı	Pipettor Brand/	Maka					Soco	orex (Calib	ra /A	Accu	ra								,	4xyg	en Axy	/pet				
	ripettoi branu/	Маке			Sin	gle	Char	nel				Mul	ti Ch	anne	l			Sir	igle C	han	nel			Ν	1ulti C	hanne	el
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.1-20µԼ	0.2-20µl	0.5-10µl	1-10րլ	2-20µԼ	10-100րԼ	20-200µԼ	100-1000µl	1-10րլ	5-50µԼ	10-100րև	20-200µl	50-200µl	0.1-2µl	0.5-10µԼ	2-20µԼ	5-50µԼ	10-100րԼ	20-200µl	50-250µԼ	100-1000րլ	1-10րԼ	5-50µԼ	20-200µԼ	50-300µԼ
P10115	P10001	0.2 - 10 μl			V	V					V						V							V			
P10137	P10002	0.2 - 10 μl			V	V					V						V							V			
P10129	-	2 - 200 µl						V	V			V	V	V	V				V	V	V				V	V	V
P10130	P10003	2 - 200 µl						V	V			V	V	V	V				V	V	V				V	V	V
P10101	-	2 - 200 µl						V	V			V	V	V	V				V	V	V				V	V	V
P10105	P10004	2 - 200 µl						V	V			V	V	V	V				V	V	V				V	V	V
P10138	P10005	2 - 300 µl						V	V			V	V	V	V				V	V	V	V			V	V	V
P10102	-	100 - 1000 μl								V													V				
P10106	P10006	100 - 1000 µl								V													V				

Pipettor Brand	d/ Make	BRANI)	Ерре	endorf	Biohit Pro	oline plus	Gils	on	Ther	mo	Abo	los
Abdos Code for Pipette Tips	Volume	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml
P10144	1 - 5 ml			V		V		V				V	
P10145	1 - 10 ml		V		V		V		V				V

Р	ipettor Brand/ N	1ake	Abdos premium	Abdos premium Plus	ABDOS D. Pipette (Electronic)	Brand Transferpette S	Gilson Pipetman	Eppendorf Research
				Single channel			Single channel	
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	100-1000րև	100-1000րև	100-1000րև	100-1000րև	100-1000µԼ	100-1000րև
P10174	P10026	100 - 1000 μl XL	V	√	V	√	V	V
P10175	P10027	100 - 1250 μl	V	V	√	V	V	V

P	lipettor Brand/ M	lake	THERMO (Electronic) Finnpipette	Thermo Finnpipette F3	Nichiryo NICHIPET EX	SOCOREX ACURA 825	BIOHIT Proline	ErgoOne Star Lab
			Multi channel			Single channel		
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	100-1200µԼ	100-1000µԼ	100-1000µԼ	100-1000µԼ	100-1000µԼ	100-1000µԼ
P10174	P10026	100 - 1000 μl XL	V	V	V	V	V	V
P10175	P10027	100 - 1250 μl	V	√	V	V	V	V

ABDOS FILTER TIPS & LAST DROP FILTER PIPETTE TIPS

COMPATIBILITY CHART

ı	Pipettor Brand/	Make	Abd	os Pr gle (Sin-	Prer	nium	lbdo n Plu nann	ıs (Si	ingle				Ab Sing	dos Jle (emium annel)	Р	os Prei lus (M Channe	ulti
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.5 - 10 µl	2-20 µl	10-100 µԼ	20-200րլ	100-1000 µl	0.5 - 10 µl	2-20 µl	10-100 µl	20-200 או	100-1000 µl	5 րվ	10 µl	20 µl	25 µl	50 µl	100 µl	200 µl	250 µl	500 µl	1000 µl	0.5 - 10 µl	5 - 50 μl	50-300 μl	0.5 - 10 µl	5 - 50 µl	50-300 µl
P11001	P11050	0.2 - 10 μl	V					V					V	V									V			V		
P11002	P11051	0.2 - 10 μl	V					V					V	V									V			V		
P11003	P11052	2 - 20 µl		V	V	V			V	V	V				V	V	V	V	V	V				V	V		V	V
P11026	P11066	2 - 50 µl		V	V	V			V	V	V				V	V	V	V	V	V				V	V		V	V
P11004	P11053	2 - 100 µl		V	V	√			V	V	V				V	V	V	V	V	V				V	V		V	V
P11005	P11054	2 - 200 µl		V	V	V			V	V	V				V	V	V	V	V	V				V	V		V	V
P11006	P11055	2 - 300 µl		V	V	V			V	V	V				V	V	٧	V	V	V				V	V		V	V
P11007	P11056	100 - 1000 μl					V					V									V	V						

F	Pipettor Brand /	Make		nit eL le Cha				ohit e ti Cha	Line innel)		iohit						_ine® innel)			t Pro					roline han-		ohit e gle C nel)	Chan-
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.2-10µԼ	5-120µl	10-300µԼ	50-1000µԼ	0.2-10µԼ	5-120µլ	10-300µԼ	0.5-10µl	2-20µԼ	10-100րլ	20-200µl	100-1000րլ	0.5-10µԼ	5-100µԼ	30-300µl	0.2-10µԼ	5-100µԼ	10-250µl	10-500µԼ	50-1000µԼ	0.2-10µԼ	5-100րլ	25-250µԼ	0.2-10µԼ	5-100µԼ	50-1200µl
P11001	P11050	0.2 - 10 μl	V				V			V					V			V					V			V		
P11002	P11051	0.2 - 10 μl	V				V			V					V			V					V			V		
P11003	P11052	2 - 20 µl		V								V	V			V			V					V			V	
P11026	P11066	2 - 50 µl		V								V	V			V			V					V			V	
P11004	P11053	2 - 100 µl		V								V	V			V			V					V			V	
P11005	P11054	2 - 200 µl		V								V	V			V			V					V			V	
P11006	P11055	2 - 300 µl		V	V				V			V	V			V	V		V	V				V	V		V	
P11007	P11056	100 - 1000 μl				V								V								V						

F	Pipettor Brand/	Make		Biohit ılti Cl				t	roni	ine e cs nann			iohit Electi ulti C	ronics	;		Bic (Sin		Prol Chai)		iohit ulti C			Р	ohit Pr lus (Sii Chann	ngle
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.2-10µԼ	5-100µl	50-1200µԼ	25-250 µl	0.2-10µԼ	5-100µԼ	10-250µԼ	50-1000µԼ	50-1200µԼ	0.2-10µԼ	5-100µԼ	10-250µԼ	50-1200µԼ	0.2-10µԼ	5-50µԼ	10-100µԼ	50-200µԼ	10-250µԼ	200-1000µl	0.5-10µԼ	5-50µԼ	50-250µԼ	50-300µl	0.5-10µԼ	20-200µl	100-1000 או
P11001	P11050	0.2 - 10 μl	V				V					V				V						V				V		
P11002	P11051	0.2 - 10 μl	V				V					V				V						V				V		
P11003	P11052	2 - 20 µl		V				V					V				V	V	V				V				V	
P11026	P11066	2 - 50 µl		V				V					V				V	V	V				V				V	
P11004	P11053	2 - 100 µl		V				V					V				V	V	V				V				V	
P11005	P11054	2 - 200 µl		V				V					V				V	٧	٧				V				V	
P11006	P11055	2 - 300 µl		V		V		V	V				V	V			V	V	V	V			V	V	V		V	
P11007	P11056	100 - 1000 μl								V											V							V

	Dinatton Drand/	Maka						Bra	and 1	Trans	ferp	ette									Br	and E	Elect	ronic	S		
	Pipettor Brand/	маке			Si	ingle	Char	nel						Mult	ti Cha	anne	l			Singl	le Cha	annel		М	ulti C	hanr	nel
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.1-1µl	0.5-10µԼ	2-20µl 'ULTRA MICRO'	2-20µl	5-50µԼ	10-100µԼ	20-200µl	25-250µԼ	100-1000µԼ	0.5-10µԼ	2-20µl	2.5-25µl	5-50µԼ	10-100µԼ	20-200µԼ	30-300µԼ	0.5-10µԼ	10-100րև	20-200µւ	30-300µl	100-1000µԼ	0.5-10µԼ	5–100µԼ	10-200µԼ	15-300µԼ
P11001	P11050	0.2 - 10 μl		V								V							V					V			
P11002	P11051	0.2 - 10 µl		V								V							V					V			
P11003	P11052	2 - 20 µl					V	V	V						V	V	V			V	V				V	V	
P11026	P11066	2 - 50 µl					V	V	V						V	V	V			V	V				V	V	
P11004	P11053	2 - 100 µl					V	V	V						V	V	V			V	V				V	V	
P11005	P11054	2 - 200 µl					V	V	V						V	V	V			V	V				V	V	
P11006	P11055	2 - 300 µl					V	V	V	V					V	V	V	V		V	V	V			V	V	V
P11007	P11056	100 - 1000 μl									V												V				

I	Pipettor Brand/	Make			Bra	nd T	rans	ferp	ette	S					Ca	pp A	vero				Gilso	on P	ipetr	nan		Gilson Pi Ultı	
				Si	ingle C	hanr	nel		Μι	ılti C	han	nel	Sin	gle C	hanr	nel /	Multi (Char	nel		Sing	gle (Chan	nel		Multi Ch	nannel
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.1-1µԼ	-1µl 10µl MICRO' 00µl 000µl						10-100µԼ	20-200µԼ	30-300µԼ	0.2-2µl	0.5–10µl	5-50µԼ	10-100µԼ	25-200µԼ	50-300µԼ	100-1000µԼ	0.2-2µԼ	1-10µԼ	2-20µԼ	20-100µԼ	50-200µԼ	200-1000µl	1-20µԼ	20-300µԼ
P11001	P11050	0.2 - 10 μl		- 									V	V						V	V						
P11002	P11051	0.2 - 10 µl		V					V				V	V						V	V						
P11003	P11052	2 - 20 µl				V	V			V	V					V	V						V	V			
P11026	P11066	2 - 50 µl				V	V			V	V					V	V						V	V			
P11004	P11053	2 - 100 µl				V	V			V	٧					^	V						V	V			
P11005	P11054	2 - 200 µl				V	V			V	V					V	V						V	V			
P11006	P11055	2 - 300 µl				V	V			V	V	V				V	V	V					V	V			V
P11007	P11056	100 - 1000 μι						V											V						V		

	Pipettor Brand/	Make		G		<u> </u>	n Ultra			son Con			son Conc				n Neo	
					Singl	e Chan	nel		Sin	gle Cha	nnel	Mi	ulti Chan	nel		Single	Channe	l
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.2-2µl	1–10µԼ	2-20µԼ	20-100µԼ	20-200µԼ	200-1000µl	0.5-10µԼ	5-100µԼ	20-300µԼ	1-10րԼ	10-100րԼ	30-300µl	0.2-2µl	1-10µԼ	20-100µԼ	100-1000րլ
P11001	P11050	0.2 - 10 μl		V					√			V				V		
P11002	P11051	0.2 - 10 μl		V					√			V				V		
P11003	P11052	2 - 20 µl				V	V			V			V				V	
P11026	P11066	2 - 50 µl				V	V			V			V				V	
P11004	P11053	2 - 100 µl				V	V			V			V				V	
P11005	P11054	2 - 200 µl				V	V			V			V				V	
P11006	P11055	2 - 300 µl				V	V			V	V		V	V			V	
P11007	P11056	100 - 1000 μl						V										V

ı	Pipettor Brand/	Make	٧	'istal	ab C)vati	on Q	S		Vista	alab (Ovati	on M		Vist	talab	Ovati	on E	ı	Eppend	dorf	Refe	ence				ndo troni	
				Sing	gle (Char	nnel			Sir	igle (Chan	nel		M	Iulti (Chanr	nel		Sing	gle C	hann	iel					
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.2-2µL	1-10µL	2-20µL	10-100µL	20-200µL	100-1000µL	0.2-2µL	1-10µL	2-20µL	10-100µL	20-200µL	100-1000µL	0.5-20µL	5-250µL	2-125µL	25-1250µL	0.1-10µl	"0.1-10µl 'ULTRA MICRO'	2-20µl	10-100րե	20-200µԼ	100-1000µԼ	0.5-10µԼ	5-100µl	2-200µԼ	50-1000µԼ
P11001	P11050	0.2 - 10 µl	^	V	V				V	V	V				V				V		V							
P11002	P11051	0.2 - 10 μl	V	V	V				V	V	V				V				V		V							
P11003	P11052	2 - 20 µl				V	V					V	V			V	V					V	V			V	V	
P11026	P11066	2 - 50 µl				V	V					V	V			V	V					V	V			V	V	
P11004	P11053	2 - 100 µl				V	V					V	V			>	V					>	>			V	V	
P11005	P11054	2 - 200 µl				V	V					V	V			V	V					V	V			V	V	
P11006	P11055	2 - 300 μl				V	V					V	V			V	V					V	V			V	V	
P11007	P11056	100 - 1000 μl						V						V				V						V				V

	Pipettor Brand/	Make	Е	ppen			_	ch		_	Eppe	_							pette			Therr	ette	lmp	Matri act/Im	ipact2
				Sin	gle (Char	nel			М	ulti C	hanı	nel			Si	ngle (Chan	nel		Mι	ılti Ch	annel		s/mo	
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.1-2.5µԼ	0.5-10µԼ	2-20µԼ	10-100րլ	20-200րլ	100-1000րլ	0.5-10µԼ	5-100µԼ	50-100րԼ	0-300µԼ	30-300µl	50-1200µl	0.2-10µԼ	0.5-10µԼ	5-40µԼ	40-200րլ	100-1000րլ	200-1000µl	0.1-10µl	10-100րև	30-300µl	2-125µl	2-20µԼ	15-1250µl
P11001	P11050	0.2 - 10 μl		V	V				V						V	V					V					
P11002	P11051	0.2 - 10 μl		V	V				V						V	V					V					
P11003	P11052	2 - 20 µl				V	V			V	V							V				V		V		
P11026	P11066	2 - 50 µl				V	V			V	V							V				V		V		
P11004	P11053	2 - 100 µl				V	V			V	V							V				V		V		
P11005	P11054	2 - 200 µl				V	V			V	V							V				V		V		
P11006	P11055	2 - 300 µl				V	V			V	V	V	V					V				V	V	V		
P11007	P11056	100 - 1000 µl						V						√*					V	V						

F	Pipettor Brand/	Make		Labr							Labp Chan	pette inel	Si	ngle (Labı Chanı	net B			Chanı	nel	Sin		Ben	/o /0x chma		annel
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.1-2µԼ	0.5-10µԼ	2-20րլ	10-100ր1	20-200րԼ	1000-1000րլ	1-10րլ	5-50µԼ	20-200µl	50-300µl	0.5-10µԼ	2-20µԼ	10-200րԼ	100-1000µl	0.5-10µԼ	2-20րԼ	10-200րլ	100-1000րլ	0.5-10µԼ	2-20µլ	10-50µԼ	10-100րԼ	20-200րե	100-1000րլ
P11001	P11050	0.2 - 10 μl	V	V					V				V				V				V					
P11002	P11051	0.2 - 10 μl	V	V					V				V				V				V					
P11003	P11052	2 - 20 µl				V	V				V				V				V					V	V	
P11026	P11066	2 - 50 µl				V	V				V				V				V					V	V	
P11004	P11053	2 - 100 µl				V	V				V				V				V					V	V	
P11005	P11054	2 - 200 µl				V	V				V				V				V					V	V	
P11006	P11055	2 - 300 µl				V	V				V	V			V				V					V	V	
P11007	P11056	100 - 1000 μl						V								V				V						V

	Pipettor Brand/	Mako					Soci	orex	Calib	ra/A	ccui	ra								,	Axyg	en Ax	ypet				
	ripettoi brailu/	Make			Sin	gle	Char	nel				Mul	ti Ch	anne	l			Sin	gle C	han	nel			Ν	1ulti C	hanne	el
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.1-20µԼ	0.2-20µԼ	0.5-10µԼ	1-10րլ	2-20µԼ	10-100րև	20-200µl	100-1000րլ	1-10րլ	5-50µԼ	10-100µԼ	20-200µl	50-200µl	0.1-2µl	0.5-10µԼ	2-20µԼ	5-50µԼ	10-100րլ	20-200µl	50-250µl	100-1000µl	1-10րԼ	5-50µԼ	20-200րև	50-300µl
P11001	P11050	0.2 - 10 μl			V	V					V						V							V			
P11002	P11051	0.2 - 10 μl			V	V					V						V							V			
P11003	P11052	2 - 20 µl						V	V			V	V	V	V				V	V	V				V	V	V
P11026	P11066	2 - 50 µl						V	V			V	V	V	V				V	V	V				V	V	V
P11004	P11053	2 - 100 µl						V	V			V	V	V	V				V	V	V				V	V	V
P11005	P11054	2 - 200 µl						V	V			V	V	V	V				V	V	V				V	V	V
P11006	P11055	2 - 300 µl						V	V			V	V	V	V				V	V	V	V			V	V	V
P11007	P11056	100 - 1000 μl								V													V				

	Pipettor Brand/ N	1ake	BRANI)	Ерре	endorf	Biohit Pro	oline plus	Gils	on	Ther	mo	Abo	dos
f	odos Code for Filter pette Tips	Volume	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml
	P10144	1 - 5 ml			V		V		√				V	
	P10145	1 - 10 ml		V		V		V		V				V

F	Pipettor Brand/ M	lake	Abdos premium	Abdos premium Plus	ABDOS D. Pipette (Electronic)	Brand Transferpette S	Gilson Pipetman	Eppendorf Research
				Single channel			Single channel	
	Abdos Code for Last Drop Filter Pipette Tips		100-1000µl	100-1000µl	100-1000μl	100-1000µԼ	100-1000µl	100-1000րև
P11015	-	100 - 1000 μl XL	√	√	√	V	V	V
P11016	-	100 - 1250 μl	V	V	V	V	V	V

F	ipettor Brand/ M	lake	THERMO (Electronic) Finnpipette Multi channel	Thermo Finnpipette F3	Nichiryo NICHIPET EX	SOCOREX ACURA 825 Single channel	BIOHIT Proline	ErgoOne Star Lab
	Abdos Code for Last Drop Filter Pipette Tips		100-1200µl	100-1000րլ	100-1000µԼ	100-1000ן	100-1000րլ	100-1000րև
P11015	P11057	100 - 1000 μl XL	V	√	V	V	V	V
P11016	P11058	100 - 1250 μl	√	V	V	√	V	V

	Pipettor Brand/ Make		BRA	AND	Eppe	endorf		Proline lus	Gils	on	The	rmo	Ab	dos
	Abdos Code for Filter Pipette Tips	Volume	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml
Ì	P10170	1 - 5 ml			V		V		V				V	
	P10171	1 - 10 ml		V		V		V		V				V

Note: Variants of all tips are compatible with the pipette's brand mentioned in the above list.

Eg . Type : Tips - Bulk in Resealable Bags

Variants: Pipette Tips, (P10115, P10137, P10129, P10130, P10101, P10105, P10138, P10102, P10106, P10174, P10175)

Last Drop™ Low Retention Pipette Tips (P10001, P10002, P10003, P10004, P10005, P10006)

Filter Pipette Tips (P11001, P11002, P11003, P11004, P11005, P11006, P11007, P11015, P11016)

Last Drop™ Low Retention Filter Pipette Tips (P11050, P11051, P11052, P11053, P11054, P11055, P11056)

Followed with other variants & Types: Tips - Individually wrapped, Racked, Racked Sterile & Refill pack.

64 | Stepmate Stepper

- Stepmate Stepper is ideal for routine or research applications in diagnostics, molecular biology, environmental analysis and more.
- Stepmate stepper works on positive displacement pressure and offers highest precision dispensing of liquid media with high viscosity, high density and high vapour pressure.
- It provides up to 48 dispensing steps and improves work efficiently.
- It is lightweight and ergonomic.
- It can be used with one hand and is maintenance free.
- Factory fitted calibration.



Stepmate S	tepper	
Code	Capacity	No. / Case
E11171	0.5 - 50 ml	1

Suitable Tip	os & Adapter For Stepm	ate Stepper	
Code	Capacity	Colour	No. / Case
E11172D	0.5 ml	Natural	5
E11173D	1.25 ml	Natural	5
E11174D	2.5 ml	Natural	5
E11175D	5 ml	Natural	5
E11176D	12.5 ml	Natural	5
E11177D	25 ml	Natural	2 pcs piston + 1 pcs adaptor
E11178D	50 ml	Natural	2 pcs piston + 1 pcs adaptor
E11179D	25 & 50 Adaptor	-	10

^{*} The first and last dispending liquid should be discarded for precision.

Dial Setting	01	02	03	04	05
Number of Steps	48	23	15	11	8

Syringe Volume		Test	Volume ([μ l)		А%	Р%
0.50 ml	10	20	30	40	50	± 0.8	<= 0.7
1.25 ml	25	50	75	100	125	± 0.8	<= 0.5
2.50 ml	50	100	150	200	250	± 0.8	<= 0.4
5.00 ml	100	200	300	400	500	± 0.4	<= 0.3
12.50 ml	250	500	750	1000	1250	± 0.3	<= 0.3
25.00 ml	500	1000	1500	2000	2500	± 0.2	<= 0.3
50.0 ml	1000	2000	3000	4000	5000	± 0.2	<= 0.2



65 | Supreme Bottle Top Dispenser

- Supreme is a robust and reliable basic bottle top dispenser designed through years of research.
- · Supreme has a smooth and soft plunger for easy working in difficult laboratory conditions.

PTFE & ETP

· Fully Autoclavable.

SPECIFICATIONS:

Piston
Cylinder
Volume Adjustment

Volume Adjustment Knob

Value Housing

Value Assembly

Discharge Assembly Delivery Tube Inlet Tube

Calibration
Accuracy & Reproducibility

Compatibility

Borosilicate Glass
PP, 180°, Rotation
PFA
Borosilicate Glass Ball & Seat
PTFE
FEP
FEP

Individually Calibrated and Certified According to ISO 8655 Standards Excellent with all reagents except HF







Code	Capacity	Increment	Ac	curacy		cv	No. / Case
E11701	0.25 – 2.5 ml	0.05 ml	± 0.6 %	± 0.015 ml	± 0.2 %	± 0.005 ml	1
E11702	0.50 – 5 ml	0.1 ml	± 0.6 %	± 0.030 ml	± 0.2 %	± 0.010 ml	1
E11703	1 - 10 ml	0.2 ml	± 0.6 %	± 0.060 ml	± 0.2 %	± 0.020 ml	1
E11704	2.5 – 30 ml	0.5 ml	± 0.6 %	± 0.180 ml	± 0.2 %	± 0.060 ml	1
E11705	5 - 60 ml	1 ml	± 0.6 %	± 0.360 ml	± 0.2 %	± 0.120 ml	1
E11706	10 - 100 ml	2 ml	± 0.6 %	± 0.600 ml	± 0.2 %	± 0.200 ml	1



66 | Supreme Plus Bottle Top Dispenser

- Supreme duet is the most advanced, next generation, highly robust and reliable bottle top dispenser designed through years of research.
- Supreme duet has a recirculation valve for redirecting the liquid into the bottle for bubble free dispensing without any loss of reagent.
- Supreme duet has a smooth and soft plunger for easy working in difficult laboratory conditions.
- · Fully Autoclavable.

SPECIFICATIONS:

Piston Cylinder

Volume Adjustment Knob

Value Housing

Re-Circulation Value Housing

Value Assembly
Discharge Assembly

Delivery Tube

Calibration

Accuracy & Reproducibility

Compatibility

PTFE & ETP

Borosilicate Glass

PP,180° Rotation

PFA

PFA

Borosilicate Glass Ball & Seat

PTFE FEP

FEP

Individually Calibrated and Certified According to ISO 8655 Standards Excellent with all reagents except HF







Code	Capacity	Increment	Ac	curacy		cv	No. / Case
E11711	0.25 – 2.5 ml	0.05 ml	± 0.6 %	± 0.015 ml	± 0.2 %	± 0.005 ml	1
E11712	0.50 - 5 ml	0.1 ml	± 0.6 %	± 0.030 ml	± 0.2 %	± 0.010 ml	1
E11713	1 - 10 ml	0.2 ml	± 0.6 %	± 0.060 ml	± 0.2 %	± 0.020 ml	1
E11714	2.5 – 30 ml	0.5 ml	± 0.6 %	\pm 0.180 ml	± 0.2 %	± 0.060 ml	1
E11715	5 - 60 ml	1 ml	± 0.6 %	± 0.360 ml	± 0.2 %	± 0.120 ml	1
E11716	10 - 100 ml	2 ml	± 0.6 %	± 0.600 ml	± 0.2 %	± 0.200 ml	1



67 | Supreme Duet Bottle Top Dispenser

- · Supreme duet is the most advanced, next generation, highly robust and reliable bottle top dispenser designed through years of research.
- · Supreme duet has a recirculation valve for redirecting the liquid into the bottle and rinsing the instrument without dismounting from the bottle.
- Supreme duet with a worldwide patent can be used in 4 modes: dilution, rinsing, dual liquid handling and re-circulation all in a single unit.
- · Supreme duet has a smooth and soft plunger for easy working in difficult laboratory conditions.
- Fully Autoclavable.

SPECIFICATIONS:

Piston PTFE & ETP Cylinder **Borosilicate Glass** Volume Adjustment Knob PP, 180° Rotation Value Housing PFA Re-Circulation Value Housing PFA Value Assembly Borosilicate Glass Ball & Seat Discharge Assembly PTFE FEP **Delivery Tube** Inlet Tube FEP Calibration Individually Calibrated and Certified Accuracy & Reproducibility According to ISO 8655 Standards Compatibility Excellent with all reagents except HF



(E)	150 8655 121°C				
Code	Capacity	Increment	Accuracy	cv	No. / Case
E11731	0.25 – 2.5 ml	0.05 ml	± 0.6 % ± 0.015 ml	± 0.2 % ± 0.005 ml	1
E11732	0.50 – 5 ml	0.1 ml	± 0.6 % ± 0.030 ml	± 0.2 % ± 0.010 ml	1
E11733	1 - 10 ml	0.2 ml	± 0.6 % ± 0.060 ml	± 0.2 % ± 0.020 ml	1
E11734	2.5 – 30 ml	0.5 ml	± 0.6 % ± 0.180 ml	± 0.2 % ± 0.060 ml	1
E11735	5 - 60 ml	1 ml	± 0.6 % ± 0.360 ml	± 0.2 % ± 0.120 ml	1
E11736	10 - 100 ml	2 ml	± 0.6 % ± 0.600 ml	± 0.2% ± 0.200 ml	

68 | Serological Pipettes Sterile, PS

- ABDOS serological pipettes are designed for accurate and rapid fluid dispensing.
- ABDOS sterile serological pipettes are pyrogen free and PE filter plugged for a variety of liquid handling applications.
 The sharp, black, highly legible permanent graduations prevent ambiguity and guarantee precise reading and accurate dispensing to ±2%.
- Made of transparent medical grade polystyrene, sterilized by gamma irradiation.
- ABDOS serological pipettes are tested for endotoxins (0.005 Eu/ml), cytotoxicity (ISO 10993-5) and are guaranteed non-haemolytic.
- · Ideal in Cell culture & tissue culture applications.
- The reverse graduations of ABDOS disposable serological pipettes show volume removed or remaining on all pipettes larger than 1mL. Moreover, the generous negative graduations provide additional pipetting volume.
- ABDOS sterile serological pipettes have an effective filter barrier to prevent overflow of liquid into pipette. Designed to fit with available motorized pipette controllers.



Code


Height









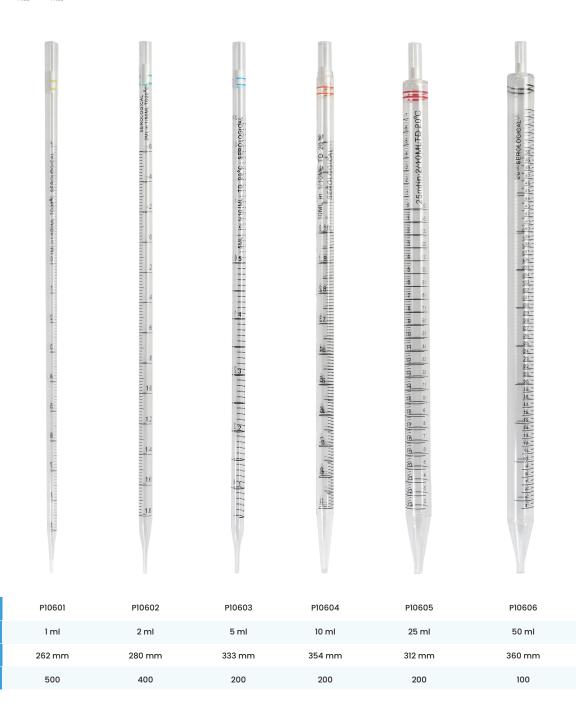

69 | Fast Release Pipette Pump

- Abdos fast release pipette pump ensures quick and accurate operation.
- This lightweight pipette pump has a fast release trigger that dispenses the entire pipette contents.
- The thumb wheel easily rotates for precision aspirating or dispensing, down to a volume of one drop at a time.
- The thumb wheel can be used to blow out the contents of the pipette.
- · Resistant to acids, alkalis.
- Easily disassemble for cleaning.

Code	Capacity	No. / Case
E11219	2 ml	4
E11220	10 ml	4
E11221	25 ml	4



70 | Handypette Pipette Aid

- · Colour coded by volume with green for 10 ml and red for 25 ml.
- Users can easily insert glass and plastic pipettes into the collar with stable fingers for secure hold.
- Rotating the knurled thumbwheel draws liquid to desired volumes. To release liquid apply light pressure to the fast release lever. For gradual dispensing rotate the thumb wheel.
- · Resistant to acids, alkalis.
- · Easily disassemble for cleaning.

Code	Capacity	No. / Case
E11222	2 ml	4
E11218	10 ml	4
E11216	25 ml	4



71 | Rave Pipette Controller, PP

- Abdos Rave Pipette Controller is robust, lightweight and its simple to use operations makes it ideal for repetitive pipetting.
- Users can use Volumetric and Serological Pipettes ranging from 1 ml to 100 ml.
- Abdos Rave Pipette Controller has autoclavable silicone pipette holder.
- Abdos Rave Pipette Controller is supplied with integral and replaceable 0.3 um filter. The in-line filter prevents contamination.
- Precise Pipetting control is possible in Abdos Rave Pipette Controller.

Rave Pipette Controller					
Code	Product	No. / Case			
E11113	Rave Pipette Controller	1			
Spare Filters					
Code	Product	No. / Case			
E11119	Spare 3.00 um Filter	1			



72 | Rave Pipette Filler

- Abdos Rave Plus Pipette Filler is robust, light-weight and is ergonomically designed to allow longer, fatigue- free pipetting.
- Abdos Rave Plus Pipette Filler is powerful and can fill a 50 ml Pipette in less than 10 seconds. Motor & pump operate quietly with very low vibration.
- Users can use Volumetric and Serological Pipettes ranging from 1 ml to 100 ml.
- Abdos Rave Plus Pipette Filler is supplied with Lithium-ion battery that provides enough battery power to finish the
 users series.
- Abdos Rave Pipette Controller is supplied with integral and replaceable 0.45 um filter.

SPECIFICATIONS:

Battery

Battery Service Life

More than 8 hours of Intermittence use.

Charging Time

Approx. 2 Hours.

Pipette Types

Glass or Plastic Pipettes (0.1–100ml)

Aspirate Speeds

Dispense Speeds

8 Gravity Dispense

Filter

0.45 µm Hydrophobic



Rave Pipette Filler					
Code	Product	No. / Case			
E11114	Rave Plus Pipette Filler	1			
E11120	Rave Eco Pipette Filler	1			

Rave Pipette Filler					
Code	Product	No. / Case			
E11116	Spare 0.45 um Filter	1			
E11117	Spare Lithium - ion	1			
E11118	Spare Adapter	1			



73 | Pipette Stand Vertical, PP

- $\bullet \ \ \text{These Polypropylene racks can hold up to 28 glass or plastic pipettes in vertical position}.$
- The Heavy base has a diameter of 9 inch and polypropylene coated square rod having a length of 15 inches is screwed into the base.
- These racks are available in white colour.
- There are two discs to hold the pipette and give it stability. Both Discs can be moved in upward and downward direction to accommodate various lengths of pipette.
- Can be autoclaved.







74 | Pipette Stand Horizontal, PP

- These Polypropylene racks can hold upto 12 glass or plastic pipettes in horizontal position.
- The rack consists of three polypropylene coated metal rods to provide stability and strength to rack.
- Can be Autoclaved.
- · These Racks are available in white colour.
- These racks can be easily assembled or disassembled to save space.



Code	Places	No. / Case
P70204	12	6



75 | Pipette Storage Rack with Magnet, ABS

- These racks help to protect and organize glass and plastic pipettes.
- Angled four shelved compartments keep 0.1 to 50 mL pipettes or cans within easy reach while preventing damage and clutter.
- These have cut-out viewing window and come with two removable attachments that hold pipette bulbs, fillers, and pumps.
- These unique innovative magnetized racks have strong magnets on both sides and mount securely to most metal surfaces.


Code	Places	LxWxH	No. / Case
P70202	Store 1 - 50 ml pipette or cans	291 x 88 x 401 mm	1



76 | Pipette Storage Rack, ABS

- These racks can be assembled together horizontally or vertically to build the desired configuration, or used as individual holders, using sections.
- Angle shelve design makes these racks compatible to use for storing 0.1 to 50 ml of Serological pipettes.
- Can be used bench-top or can be connected to most metal surfaces.

Code	Size (W x H x D)	Compatible	No. / Case
P10620	301 x 100 x 127.5mm	0.1 ml to 50 ml	3



77 | Pasteur Pipettes, LDPE

- Excellent chemical stability.
- Suitable for drawing, transferring and blending various volumes of liquid.
- Transparent with clear graduation markings for easy liquid level observation.
- Manufactured in ISO 8 grade clean room.
- No additive contamination.
- Pipettes can be twisted and contorted for use with micro-vessels & oddly shaped containers.
- High precision and good repeatability.
- The individually packed pipettes are sterilized by Gama radiation.



Code	P31207	P31208
Capacity	0.4 ml	0.4 ml Sterile, Individually wrapped
Height	131 mm	131 mm
No./Case	500	500

P31201	P31202	
1.0 ml	1.0 ml Sterile, Individually wrapped	
154 mm	154 mm	
500	450	

P31209	P31210		
2.0 ml	2.0 ml Sterile, Individually wrapped		
152 mm	152 mm		
500	450		

P31205	P31206	
3.0 ml	3.0 ml Sterile, Individually wrapped	
154 mm	154 mm	
500	450	

78 | RIA Vial & Cap / Test Tube & Cap

- Abdos Ria Vials are polypropylene/polystyrene tubes generally used in Radioimmuno Assay –a scientific method used to test antigens (for sample, hormone levels in the blood) without the need to use a bioassay.
- Abdos Ria Vial PP are clear and can withstand 3000*g RCF during centrifugation while the transparent polystyrene tubes can withstand 1400*g RCF.
- The PP tubes can accept common acids, alkalies & solvents at room temperature while the PS tubes can accept mild bases, weak acids but not organic solvents.
- Amber Ria Vials are used for light sensitive samples.
- Abdos Ria Vials PP are autoclavable while PS tubes are non-autoclavable.




















RIA Vial & Plastic Test Tube				
Code	Фхһ	Material	Capacity	No. / Case
P10301	12 x 75 mm	PP	5 ml	500
P10303	12 x 75 mm	PS	5 ml	500
P10305	12 X 40 mm	PP	2.5 ml	500
P10306	12 X 40 mm	PS	2.5 ml	500
P10308	13 X 100 mm	PP	8 ml	500
P10309	13 X 100 mm	PS	8 ml	500
P10310	16 X 100 mm	PP	10 ml	500
P10311	16 X 100 mm	PS	10 ml	500

RIA Vial Cap & Plastic Test Tube Cap				
Code	Ф	Material	No. / Case	
P10304	12 mm	HDPE	500	
P10307	12 mm	PP	500	
P10302	12 mm	LDPE	500	
P10312	13 mm	HDPE	1000	
P10313	16 mm	HDPE	1000	

Amber RIA Vial				
Code	Фхһ	Material	Capacity	No. / Case
P10301A	12 x 75 mm	PP Amber	5 ml	500
P10301A1	12 x 75 mm	PP Transparent Amber	5 ml	500
P10305A	12 x 40 mm	PP Amber	2.5 ml	500
P10305A1	12 x 40 mm	PP Transparent Amber	2.5 ml	500

Amber RIA Vial Cap, HDPE			
Code	Φ	Material	No. / Case
P10304A	12 mm	HDPE Amber	500
P10304A1	12 mm	HDPE Transparent Amber	500













79 | Sample Container, PP/HDPE

- Ultra clear polypropylene container with polyethylene leak proof screw cap.
- · Frosted portion for easy writing.
- · Clear and easy to read graduations.
- Sterile container is individually packed in polyethylene pouch.
- · Clean room ISO class 8.



















PYROGEN FREE	FREE FREE LEAKTEST 121°C FREE FREE	D SIEKILE K			
Code	Capacity	Colours	Subdivision	Height	No. / Case
P40101	60 ml	Blue, Red & White	10 ml	55 mm	400
P40102	60 ml Sterile, Individually wrapped	Blue, Red & White	10 ml	55 mm	350
P40105	60 ml (Spoon Included)	Blue, Red & White	10 ml	55 mm	400
P40106	60 ml, Sterile Individually Wrapped (Spoon Included)	Blue, Red & White	10 ml	55 mm	350
P40103	120 ml	Blue, Red & White	20 ml	76 mm	200
P40104	120 ml Sterile, Individually wrapped	Blue, Red & White	20 ml	76 mm	200
P40112	200 ml	Blue, Red & White	20 ml	120 mm	150
P40113	200 ml Sterile, Individually wrapped	Blue, Red & White	20 ml	120 mm	100
Add Col	our Code of your choice: BLUE (B), RED (R), WH	ite (w)			



An IVD CERTIFIED PRODUCTS best recommended for diagnostics with a leakproof screw cap, principally important when transporting hazardous material. Ideal for transport and storage of urine, sputum and most liquids or particulate samples.

Samples containers shatter resistant Manufactured from ultra-pure USP-VI Virgin Polypropylene (PP) and Comply with the requirement of 21 CFR 177.1520.

Containers are Manufactured inside the controlled, validated Clean Room ISO Class 8 by high-end Injection Moulding using high precision moulds which ensure smooth and symmetrical End product.



04MICROBIOLOGY


PETRI DISH PS: 60, 90 & 140 MM


HOMOGENIZERS

SOFT INOCULATION LOOPS

CELL SPREADERS & MORE

Petri Dish Features

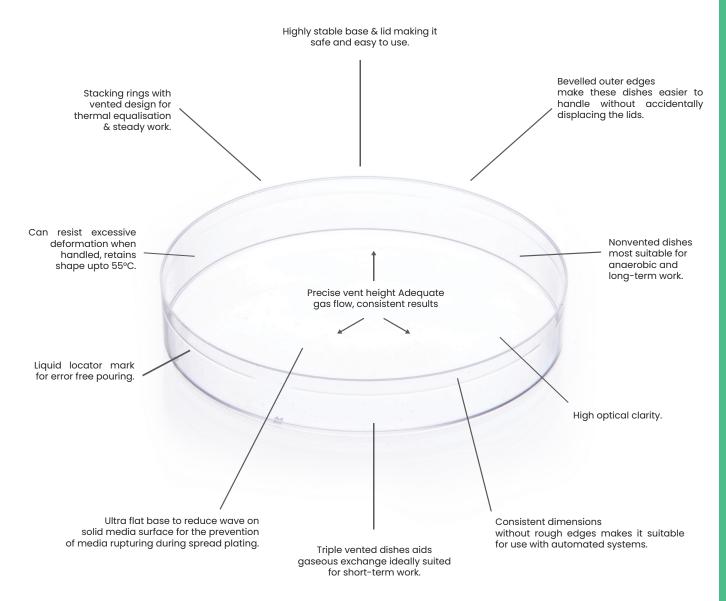

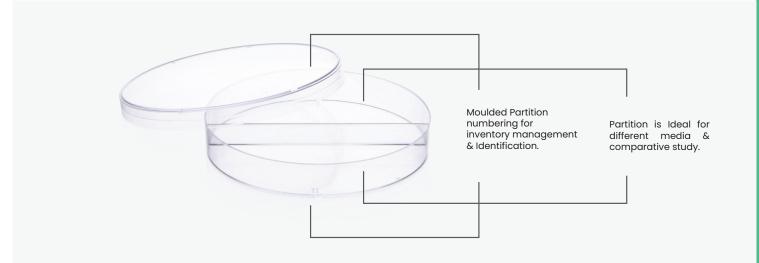

80 | Petri Dish, PS

- Abdos high quality disposable Petri Dishes are suitable for all microbiological applications manufactured as per ISO 24998 'Plastics laboratory ware Single-use'.
- · Robust dimensional accuracy of 90 mm ensures compatibility with most automated systems.
- Extremely high optical clarity for easy view on microscope.
- Vented Dishes have elevated lid that allows for superior gas exchange and evaporation.
- · Non-Vented Dishes have flat lid that prevents evaporation, encouraging long incubation period & anaerobic application.
- Shallow dish design allows for maximum use of incubator space.
- · Easy to stack.
- Abdos Petri Dishes retain their shape upto 55°C.
- Aseptic Dishes are manufactured in clean room under controlled low bio-burden conditions for best performance in all applications.
- Abdos Petri Dishes are also available in two & three compartments that enable parallel testing of single sample using different agar, solvents and reagents.
- Sterile Plates have been validated according to ISO 11137 for SAL 10-6





















	Petri Dish - Aseptic, PS								
Code	Diameter	Height	Compartment	Vented	Packing	No. / case			
P10931	60 mm	14.20 mm	No	0 Vent	Sleeve of 20	1400			
P10932	60 mm	14.20 mm	No	3 Vent	Sleeve of 20	1400			
P10901	90 mm	15.80 mm	No	3 Vent	Sleeve of 20	480			
P10902	90 mm	15.80 mm	No	3 Vent	Individual Wrapped	380			
P10903	90 mm	15.80 mm	No	0 Vent	Sleeve of 20	480			
P10904	90 mm	15.80 mm	No	0 Vent	Individual Wrapped	380			
P10933	140 mm	17.50 mm	No	0 Vent	Sleeve of 5	180			
P10934	140 mm	17.50 mm	No	3 Vent	Sleeve of 5	180			

Petri Dish - Gamma Radiated Sterile, PS							
Code	Diameter	Height	Compartment	Vented	Packing	No. / case	
P10935	60 mm	14.20 mm	No	0 Vent	Sleeve of 20	1400	
P10936	60 mm	14.20 mm	No	3 Vent	Sleeve of 20	1400	
P10905	90 mm	15.80 mm	No	3 Vent	Sleeve of 20	480	
P10906	90 mm	15.80 mm	No	3 Vent	Sleeve of 10	480	
P10907	90 mm	15.80 mm	No	3 Vent	Individual Wrapped	380	
P10908	90 mm	15.80 mm	No	0 Vent	Sleeve of 20	480	
P10909	90 mm	15.80 mm	No	0 Vent	Sleeve of 10	480	
P10910	90 mm	15.80 mm	No	0 Vent	Individual Wrapped	380	
P10937	140 mm	17.50 mm	No	0 Vent	Sleeve of 5	180	
P10938	140 mm	17.50 mm	No	3 Vent	Sleeve of 5	180	

	Petri Dish - Gamma Radiated Sterile, Double Wrapped, PS					
Code	Diameter	Height	Compartment	Vented	Packing	No. / case
P10928	90 mm	15.80 mm	No	0 Vent	Sleeve of 18	432
P10927	90 mm	15.80 mm	No	0 Vent	Sleeve of 8	384
P10939	90 mm	15.80 mm	No	3 Vent	Sleeve of 18	432
P10940	90 mm	15.80 mm	No	3 Vent	Sleeve of 8	384

	2 Compartment Petri Dish - Aseptic, PS						
Code	Diameter	Height	Compartment	Vented	Packing	No. / case	
P10911	90 mm	15.80 mm	2 Compartment	3 Vent	Sleeve of 20	480	
P10912	90 mm	15.80 mm	2 Compartment	3 Vent	Individual Wrapped	380	
P10913	90 mm	15.80 mm	2 Compartment	0 Vent	Sleeve of 20	480	
P10914	90 mm	15.80 mm	2 Compartment	0 Vent	Individual Wrapped	380	

		2 Cor	mpartment Petri Dish - Gar	nma Radiated Ste	rile, PS	
Code	Diameter	Height	Compartment	Vented	Packing	No. / case
P10915	90 mm	15.80 mm	2 Compartment	3 Vent	Sleeve of 20	480
P10916	90 mm	15.80 mm	2 Compartment	3 Vent	Individual Wrapped	380
P10917	90 mm	15.80 mm	2 Compartment	0 Vent	Sleeve of 20	480
P10918	90 mm	15.80 mm	2 Compartment	0 Vent	Individual Wrapped	380



	3 Compartment Petri Dish - Aseptic, PS							
Code	Diameter	Height	Compartment	Vented	Packing	No. / case		
P10919	90 mm	15.80 mm	3 Compartment	3 Vent	Sleeve of 20	480		
P10920	90 mm	15.80 mm	3 Compartment	3 Vent	Individual Wrapped	380		
P10921	90 mm	15.80 mm	3 Compartment	0 Vent	Sleeve of 20	480		
P10922	90 mm	15.80 mm	3 Compartment	0 Vent	Individual Wrapped	380		

	3 Compartment Petri Dish - Gamma Radiated Sterile, PS							
Code	Diameter	Height	Compartment	Vented	Packing	No. / case		
P10923	90 mm	15.80 mm	3 Compartment	3 Vent	Sleeve of 20	480		
P10924	90 mm	15.80 mm	3 Compartment	3 Vent	Individual Wrapped	380		
P10925	90 mm	15.80 mm	3 Compartment	0 Vent	Sleeve of 20	480		
P10926	90 mm	15.80 mm	3 Compartment	0 Vent	Individual Wrapped	380		



81 | Petri Dish Stand, ACRYLIC

- The simple design can hold and secure glass and plastic petri-dishes.
- This stand makes transport safe and easier.
- · Clear racks give the visibility to check culture during incubation.



Code	Places	Size (W x H x D)	Compatible Petridish	No. / Case
P10970	28	213 v 252 v 112mm	90mm	1



82 | Soft Inoculation Loop, ABS

- · Smooth surface provides uniform and gentle streaking without damaging the gel surface.
- Polygonal shaft improves grip, assists orientation and makes operation easy.
- · Available in individual wrapped pack and zip lock sleeve that eliminates the risk of contamination.
- Sterile loops have been validated according to ISO 11137 for SAL 10^{-6}





Code	Capacity	Colour	Length	Packing	No. / Case
P10985	1 μl loop + Incorporated Needle	White	200 mm	Sleeve of 20	2000
P10986	1 µl loop + Incorporated Needle	White	200 mm	Individually Wrapped	500
P10987	10 µl loop + Incorporated Needle	Blue	200 mm	Sleeve of 20	2000
P10988	10 µl loop + Incorporated Needle	Blue	200 mm	Individually Wrapped	500



83 | Cell Spreader Gamma Radiated Sterile, PP

- Cell spreaders are designed to spread and disperse liquid onto the surface of an agar or any media plate without gouging or cutting the medium.
- Available in Triangular, T-shaped & L-shaped.
- Sterile Cell Spreader has been validated according to ISO 11137 for SAL 10^{-6}





Code	Shape	Length	Blade Width	Colour	Packing	No. / Case
P10989	Triangle Shaped	215 mm	30 mm	Blue	Individually Wrapped	100
P10990	Triangle Shaped	240 mm	60 mm	Yellow	Individually Wrapped	100
P10991	T- Shaped	140 mm	35 mm	Blue	Individually Wrapped	400
P10995	L - Shaped	145 mm	37.5 mm	Green	Individually Wrapped	100
P10996	L - Shaped	145 mm	37.5 mm	Green	Sleeve of 10	500



84 | Swirlex - Digital Handheld Homogenizer

- ABDOS Swirlex-Digital Handheld Homogenizer is a powerful handheld homogenizer designed to rapidly homogenize, disperse and disintegrate biological samples in 10-30 seconds with adjustable speed ranging from 8,000 rpm up to 30,000 rpm.
- The homogenizer is ideal to use with samples from 0.5ml to 250ml with three types of generator probes available for different sample volume range.
- It is lightweight, can be held with one hand and also mounted to a stand for fatigue-free and longer operation. Complete homogenization of tissues (muscle, liver, breast tissue, etc.) is generally achieved in a few seconds.
- Autoclavable generator shaft is made up of 316L stainless steel Interchangeable generator probes that are easily disassembled for clean-up.
- · Optional H-type stand with adjustable height and angle available for more convenient and lengthier operation.

Swirlex-I	Digital Hand Held Homogenizer		
Code	Product	Volume Range	No. / Case
E12410	Swirlex-Digital Hand Held Homogenizer with Dispersing shaft Suporting for volume 0.1-50 ml & Support Stand	0.1-50 ml	1
E12420	Swirlex-Digital Hand Held Homogenizer with Dispersing shaft Suporting for volume 1-250 ml & Support Stand	1-250 ml	1

Spare Accessories							
Code	Product	Volume Range	No. / Case				
E12411	Dispersing Shaft - Length-90mm, process volume- 0.1-50 ml	5 mm	1				
E12412	Dispersing Shaft - Length-160mm, process volume- 0.3-50 ml	7 mm	1				
E12413	Dispersing Shaft - Length-150mm, process volume-1-250 ml	10 mm	1				
E12414	Dispersing Shaft Length-170mm;process volume-2-250 ml	14 mm	1				
E12415	Support Stand	-	1				

Voltage	220-240 V
Frequency	50-60 Hz
Motor Type Universal Motor	AC Carbon Brush Motor
Speed range	8000-30000 rpm
Max. Circum Speed	6.3-14 m/sec
Speed Control Dial Knob	6 Stage
Working Volume (ml, H ₂ O)	0.1-50 ml (5mm Dispersing Sh
	1-250 ml (10mm Dispersing Sh
Maximum Viscosity	5,000 mPas
Material of Dispersing Shaft	SS 316L Stainless steel, PTFE
Weight	0.6 kg
Dimension (L x W x H)	46 x 55 x 230 mm
Noise	72 dB
Permissible ambient Temperature &	5-40°C
Humidity	
Permissible relative humidity	80%
Protection Class	IP20





85 | Swirlex - Flapping Homogenizer (Stomaker)

- Swirlex-Flapping Homogenizer (Stomaker) is a new generation lab blender, silent, easy-to-use & has a new design, with great new features, along with the silent blending. It is adapted to all kinds of applications and with a guarantee of optimal extraction, it is a great tool for lab analyses avoiding all risk of cross-contamination and damage.
- It can be used to extract bacteria from solid samples as well as homogenization of animal tissues, cosmetics, and biological samples. It is convenient, very quick, mild, accurate and also provides good repeatability.
- To extract bacteria from solid samples, put the original samples and the diluents into a sterile bag. Put the bag then into the homogenizer, through the flapping of the paddles. The material inside the bag can rapidly reach a homogenized state by the pressure, shaking, and vibration inside.
- In order to get a guaranteed uniformity of the effective extraction of the bacteria inside and on the surface of the solid samples, make sure to include all the materials in the sterile bag to the homogenizer. Then the homogenized sample can be used for analysis, the sterile bag avoids the cross-contamination.
- The main advantage of Swirlex -flapping homogenizer is that it is convenient, very quick, mild, accurate and also provides good repeatability. Samples used for the extraction will not be contaminated, damaged, heated, and no sterilization, as well as no container is needed, thus no container cleaning process either.

Swirlex -	Swirlex - STOMAKER - Flapping Homogenizer						
Code	Product	Flapping Speed	Exterior Size	Interior Size	No. / Case		
E12430	Stomaker, Stainless Steel Door	Adjustable between 20-600 Stokes/min (10-300rpm/min)	45 x 21 x 24 cm	10 x 19 x 22 cm	1		
E12431	Stomaker Plus, Stainless Steel Door with Observation Window	Adjustable between 20-600 Stokes/min (10-300rpm/min)	45 x 21 x 24 cm	10 x 19 x 22 cm	1		

Spare Accessories						
Code	Product	Capacity	No. of bag / Box			
E12432	Sterilization Bag	80 ml	1500 (25 pcs per pack, 60 packs per case)			
E12433	Sterilization Bag	400 ml	500 (25 pcs per pack, 20 packs per case)			
E12435	Sterilization Bag with filter on one side	400 ml	500 (25 pcs per pack, 20 packs per case)			
E12436	Sterilization Bag with overall filter	400 ml	500 (25 pcs per pack, 20 packs per case)			
E12437	Clip for Sterilization Bag	-	1			

SPECIFICATIONS:	STOMAKER	STOMAKER PLUS
Voltage	220-240 V	220-240 V
Frequency	50-60 Hz	50-60 Hz
Door Design	Stainless Steel Door	Stainless Steel Door with ob-
		servation window
Capacity Range	50-400 mL	50-400 mL
Flapping Speed	Adjustable between 20~600	Adjustable between 20~600
	Stokes/min(10~300rpm/min)	Stokes/min(10~300rpm/min)
Exterior Size (W x D x H)	45 x 21 x 24 cm	45 x 21 x 24 cm
Interior Size (W x D x H)	10 x 19 x 22 cm	10 x 19 x 22 cm



#CommittedtotheEarth



05 CELL CULTURE

CELL CULTURE FLASKS, PS
TISSUE CULTURE TREATED PLATES, PS
CELL CULTURE DISHES, PS
BIO REACTION TUBES, PP
ROLLER, MEDIA & BIOFILL BOTTLES

86 | Cell Culture Flasks, PS

- · Abdos Tissue culture treated plates are made from the highest quality of virgin polystyrene.
- Culture Flasks have been treated with vacuum plasma to assure uniform growth.
- Flat high clarity polysterene surface for distortion-free observation.
- Angled neck for easy access till corner of the flask.
- · Frosted writing area with clear moulded graduation marking.
- · Designed with precision for stackable stability.
- · Culture flask with breathable vented cap membrane 0.22 um, hydrophobic filter ensure gas exchange without contamination.
- Sterilized by E-beam, Sterile culture flask has been validated according to ISO 11137 for SAL 10⁻⁶











FREE	FREE FREE	FREE				
Code	Capacity	Cap Style	Cell Growth Area	Recommended Medium Volume	No. / Pack	No. / Case
P21010	50 ml	Sealed Cap	25 cm ²	5 ml - 7.5 ml	10	200
P21011	50 ml	Vent Cap	25 cm ²	5 ml - 7.5 ml	10	200
P21012	250 ml	Sealed Cap	75 cm ²	15 ml - 22.5 ml	5	100
P21013	250 ml	Vent Cap	75 cm ²	15 ml - 22.5 ml	5	100
P21014	750 ml	Sealed Cap	175 cm²	35 ml - 52.5 ml	5	40
P21015	750 ml	Vent Cap	175 cm²	35 ml - 52.5 ml	5	40
P21016	950 ml	Sealed Cap	225 cm ²	45 ml - 67.5 ml	5	25
P21017	950 ml	Vent Cap	225 cm ²	45 ml - 67.5 ml	5	25
		1				

87 | Tissue Culture Treated Plates, PS

- · Abdos Tissue culture treated plates are made from highest quality of virgin polystyrene.
- Plates are designed with low profile & low-evaporation rate ensuring no loss of samples.
- · Vital gaps on the bottom corners of each plate eliminates scraping of the microscopic lens.
- Plates have been treated with vacuum plasma to assure uniform growth.

Both vent and plug seal caps are available

- · Easy to peel-open and individually wrapped blister pack with lot number for traceability.
- Sterilized by E-beam, Sterile plates have been validated according to ISO 11137 for SAL 10-6











STERILE E

Code	No. of well	Cell Growth Area	Bottom shape	Recommended Medium Volume	No. / Case
P21020	6	9.5 cm ²	flat	1.90 ml - 2.90 ml	50
P21021	12	3.6 cm ²	flat	0.76 ml - 1.14 ml	50
P21022	24	1.9 cm ²	flat	0.38 ml - 0.57 ml	50
P21023	48	0.88 cm ²	flat	0.19 ml - 0.28 ml	50
P21024	96	0.32 cm ²	flat	0.10 ml - 0.20 ml	100
P21025	96	0.32 cm ²	U	0.10 ml - 0.20 ml	100
P21026	96	0.32 cm ²	V	0.10 ml - 0.20 ml	100

88 | Cell Culture Dish, PS

- · Abdos Tissue culture treated plates are made from highest quality of virgin polystyrene.
- · Culture dishes are ideal for all types of culturing where microscopic observation is required.
- Dishes have been treated with vacuum plasma to assure uniform growth.
- Flat high clarity polysterene surface for distortion-free observation.
- Sterilized by E-beam, Sterile culture dish has been validated according to ISO 11137 for SAL 10⁻⁶











Code	Diameter	Height	Cell Growth Area	Recommended Medium Volume	No. / Pack	No. / Case
P21030	35 mm	9 mm	9 cm ²	1.80 ml - 2.70 ml	20	500
P21031	60 mm	12 mm	21 cm ²	4.20 ml - 6.30 ml	20	500
P21032	100 mm	17.7 mm	55 cm ²	11 ml - 16.50 ml	20	300
P21033	150 mm	23.1 mm	152 cm²	30.40 ml - 45.60 ml	5	100

89 | Cell Scraper, PP/HIPS

- Abdos Cell Scrapers blades are made for HIPS and handle is made of PP.
- Specially designed with free rotating blade to turn as per required direction.
- Sterilized by E-beam, Sterile cell scrapers have been validated according to ISO 11137 for SAL 10⁻⁶











APPLICATION

P21040 - T-25/ T-75 Cell Culture flasks, 60 mm cell culture dish P21041 - T-75/ T-175/ T-225 Cell Culture flasks, 150 mm cell culture dish

Code	Length	Blade Width	No. / Case
P21040	220 mm	13 mm	100
P21041	280 mm	20 mm	100

L 10-6

90 | Cell Strainers

- ABDOS Cell strainers are manufactured from a strong medical grade nylon mesh with fine and even spaced pores used for isolating primary cells to suffice tissue culture technique for obtaining uniform single cell suspension from tissues.
- These strainers are available in 3 mesh sizes : 40 µm, 70 µm and 100 µm with 3 different color codings for easy identification.
- The frame of strainer is made of virgin Polypropylene with extended lip for easy handling.
- These strainers provide ideal fitment with ABDOS 50 ml Centrifuge tubes.
- Sterilized by Gamma irradiation, Cell Strainers have been validated according to ISO 11137 for SAL 10⁻⁶









Code	Pore Size	Colour	No. / Case
P21050	40 μm	Blue	50
P21051	70 µm	White	50
P21052	100 µm	Yellow	50



91 | Roller Bottles, PS

- ABDOS Roller bottles are made from the highest quality Polystyrene suitable for high yield of cell growth and multiplication.
- These bottles are available in 3 volumes of 1000ml, 2000ml, 5000ml with wide cell growth area of 490cm², 850cm², 1900cm² for adhesions and huge growth volume for cell suspension.
- These bottles are Designed with large knurls on the cap for easy grip and to prevent slip during process.
- These bottles have silk-printed graduation for easy identification.
- Suitable for all the general instruments and automation used in tissue/ cell culture technique.
- Sterilized by Gamma irradiation, sterile roller bottles have been validated according to ISO 11137 for SAL 10^{-6}











Code	Capacity	Cap Style	Cell Growth Area	Recommended Medium Volume	Surface treated	No. / Case
P21060	1000 ml	Sealed	490 cm ²	100 ml - 150 ml	Yes	24
P21061	1000 ml	Vent	490 cm ²	100 ml - 150 ml	Yes	24
P21062	1000 ml	Sealed	490 cm ²	100 ml - 150 ml	No	24
P21063	1000 ml	Vent	490 cm ²	100 ml - 150 ml	No	24
P21064	2000 ml	Sealed	850 cm ²	180 ml - 260 ml	Yes	12
P21065	2000 ml	Vent	850 cm ²	180 ml - 260 ml	Yes	12
P21066	2000 ml	Sealed	850 cm ²	180 ml - 260 ml	No	12
P21067	2000 ml	Vent	850 cm ²	180 ml - 260 ml	No	12
P21068	5000 ml	Sealed	1900 cm ²	300 ml - 400 ml	Yes	12
P21069	5000 ml	Vent	1900 cm ²	300 ml - 400 ml	Yes	12

92 | Bio Reaction Tubes, PP

- ABDOS Bio-Reaction tubes are manufactured with high purity virgin Class
 VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Bioreaction tubes are convenient and economical option for small scale, high density suspension cell culture and are ideal for biological reaction experiments that require aseptic conditions with free gas exchange.
- These tubes consist of ultrasonically welded 0.22 μm hydrophobic membrane to allow gas exchange.
- These tubes come with a large unerasable frosting white printed writing area and engraved graduation.
- These tubes are ideal for culture and centrifuge applications. Can withstand maximum 12,000*g RCF for 15ml tubes, 16,000*g RCF for 50ml conical bottom tubes, and 6,000*g RCF for self-standing tubes.











Code	Capacity	Bottom	No. / Pack	No. / Case
P21070	15 ml	Conical	10	100
P21071	50 ml	Conical	10	100
P21072	50 ml	Self-standing	10	100



93 | Media Bottles, PETG

- · ABDOS Media Bottle is manufactured with high quality PETG that complies US FDA 21 CFR, free from heavy metals.
- The Cap of the bottle is Screw cap made with HDPE (High Density Polyethylene), free of heavy metal.
- These bottles come with embossed graduation on two sided.
- · These bottles have a Shelf life of three years from the month of production.
- These bottles are compatible to work in Temperature range from -60 °C to 60°C.















FREE FREE			
Capacity	Сар	Sterile	No. / Case
500 ml	Yes	No	24
500 ml	Yes	Yes	24
	Capacity 500 ml	Capacity Cap 500 ml Yes	Capacity Cap Sterile 500 ml Yes No



94 | BIOFILL QUICK-CONNECT PEDESTAL SYSTEM

- BIOFILL Quick-Connect Pedestal System or cradle ring provides hands-free operation. Simply attach your vacuum line to the Quick-Connect hardware. When you are ready to filter, set the BIOFILL Filtration unit onto the base or cradle and open the built-in vacuum control. These units are specially designed to upgrade your efficiency and productivity in various life science applications such as tissue culture, cell therapy, genomics, and drug discovery.
- · These two filtering options offer a permanent vacuum hose connection and minimize set-up time. The vacuum hose connects to the back of the pedestal or cradle ring and enables adjustable flow control using the on/off switch. This patented docking system is made from aluminium. Works in conjunction with BIOFILL Bottle Top Filtration system in 15 ml, 50 ml, 250 ml, 500 ml, and 1000 ml.
- Dual Centrifuge Tube Stand holder provides a stationary set-up and preventing spills and tissue culture hood contamination. These optional holders allow for hands-free operation of the filter unit. Works in conjunction with BIOFILL Filtration system in 15 ml & 50 ml.

Code	Product Description	Application	No. / Case
E12400	Vacuum Filtration Pedestal	Works in conjunction with BIOFILL Bottle Top Filtration system in 15 ml, 50 ml, 250 ml, 500 ml and 1000 ml.	1
E12401	Vacuum Filtration Cradle Ring	Works in conjunction with BIOFILL Bottle Top Filtration system in 15 ml, 50 ml, 250 ml, 500 ml and 1000 ml.	1
E12402	Polystyrene Dual Centrifuge Stand	Works in conjunction with BIOFILL Filtration system in 15 ml & 50 ml.	5



95 | BIOFILL Bottle Top Filtration System

- BIOFILL Bottle Top Filtration System is available as a Full Assembly or as a bottle top Funnel. ABDOS BIOFILL Bottle Top
 Filtration Systems are disposable, sterile, vacuum operated systems for the sterile preparation of buffers, tissue culture
 media, microbiological media, and other biological fluids. Systems are available with asymmetric 0.1 µm, 0.22 µm & 0.45
 µm PES membranes. ABDOS PES membrane has low protein binding and is surfactant-free.
- BIOFILL Filtration system is designed for sterilization or clarification of aqueous laboratory fluids. The filters are gamma radiated & manufactured in clean room plant.
- The complete system is composed of a polystyrene filter funnel and receiver bottle, a SECURE grasp cap, and a vacuum hose adapter. Systems are also available with 15 ml and 50 ml polypropylene centrifuge tubes.
- Filtration funnels are compatible with the Quick Connect pedestal system, a cradle ring for use with existing lab stands, & vacuum hose adapters. Quick-Connect pedestal offers one-time vacuum connection and one-handed operation. Quick Connect Pedestal are sold separately.



BIOFILL Bottle Top Filtration System

		Funnel capacity	Receiver	Filter Pore	Membrane	/ .
Code	Product Description	Volume	Capacity Volume	Size	Diameter	No. / Case
P21090	$250 ml,\ 0.2 \mu m$ High Flow PES Bottle Top Filter Full Assembly, Sterile	250 ml	250 ml	0.2 μm	66 mm	12
P21091	500ml, $0.2\mu m$ High Flow PES Bottle Top Filter Full Assembly, Sterile	500 ml	500 ml	0.2 μm	90 mm	12
P21092	1000mL, 0.2µm High Flow PES Bottle Top Filter Full Assembly, Sterile	1000 ml	1000 ml	0.2 μm	90 mm	12
P21093	$250 ml,\ 0.45 \mu m$ High Flow PES Bottle Top Filter Full Assembly, Sterile	250 ml	250 ml	0.45 μm	66 mm	12
P21094	500ml, $0.45 \mu m$ High Flow PES Bottle Top Filter Full Assembly, Sterile	500 ml	500 ml	0.45 μm	90 mm	12
P21095	1000ml, 0.45µm High Flow PES Bottle Top Filter Full Assembly, Sterile	1000 ml	1000 ml	0.45 μm	90 mm	12
P21096	$250 ml,\ 0.1 \mu m$ High Flow PES Bottle Top Filter Full Assembly, Sterile	250 ml	250 ml	0.1 μm	66 mm	12
P21097	500ml, 0.1μm High Flow PES Bottle Top Filter Full Assembly, Sterile	500 ml	500 ml	0.1 μm	90 mm	12
P21098	1000ml, 0.1µm High Flow PES Bottle Top Filter Full Assembly, Sterile	1000 ml	1000 ml	0.1 μm	90 mm	12
P21099	50ml centrifuge Tube and Funnel , 0.2 μ m High Flow PES Membrane, Sterile	50 ml	50 ml	0.2 μm	40 mm	24
P21100	15ml centrifuge Tube and Funnel , 0.2 μ m High Flow PES Membrane, Sterile	50 ml	15 ml	0.2 μm	40 mm	24

BIOFILL Bottle Top Funnel

Code	Product Description	Funnel capacity Volume	GL Threads	Filter Pore Size	Membrane Diameter	No. / Case
P21101	250ml Funnel Only with 0.2 um PES Membrane, Sterile	250 ml	45	0.2 μm	66 mm	24
P21102	500ml Funnel Only with 0.2 um PES Membrane, Sterile	500 ml	45	0.2 μm	90 mm	24
P21103	1000ml Funnel Only with 0.2 um PES Membrane, Sterile	1000 ml	45	0.2 μm	90 mm	24
P21104	250ml Funnel Only with 0.1 um PES Membrane, Sterile	250 ml	45	0.1 μm	66 mm	24
P21105	500ml Funnel Only with 0.1 um PES Membrane, Sterile	500 ml	45	0.1 μm	90 mm	24
P21106	1000ml Funnel Only with 0.1 um PES Membrane, Sterile	1000 ml	45	0.1 μm	90 mm	24
P21107	250ml Funnel Only with 0.45 um PES Membrane, Sterile	250 ml	45	0.45 μm	66 mm	24
P21108	500ml Funnel Only with 0.45 um PES Membrane, Sterile	500 ml	45	0.45 μm	90 mm	24
P21109	1000ml Funnel Only with 0.45 um PES Membrane, Sterile	1000 ml	45	0.45 μm	90 mm	24







#CommittedtotheEarth



06 PCR TECHNIQUES

PCR TUBES

PCR PLATES

PCR STRIP CAPS

PCR SEALING FILMS & WORKSTATION

96 | PCR Tubes, PP

- Abdos PCR tubes are manufactured in state of the art precision moulded facility using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber and heavy metal.
- Abdos PCR tubes have thin and consistent wall thickness to reduce insulating effect on the tube.
- Abdos PCR tubes have longer length and even cap insertion that ensures tight fit eliminating risk of sample evaporation.
- · The caps are optically clear for real time qPCR.











Code	Capacity	Туре	Height	No. / Case
P10701	0.2 ml	Clear Flat Cap	21.5 mm	1000
P10702	0.2 ml	Domed Cap	23.16 mm	1000



97 | Strip Tubes without Cap – 8 strips & 12 strips, PP

- Abdos PCR Strip Tubes are manufactured in state of the art precision moulded facility using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber and heavy metal.
- Strip Tubes have uniform ultra thin walls to reduce insulating effect on the strips.
- Optically clear for real time qPCR.
- Strip Tubes are available in both Standard and Low Profile Wells.









Code	Capacity	Туре		No. / Case
P10706	0.2 ml	8 Strip Standard Tubes	20.7 mm	125 strips
P10708	0.1 ml	8 Strip Low Profile Tubes	16.1 mm	125 strips
P10707	0.2 ml	12 Strip Standard Tubes	20.7 mm	80 strips
P10705	0.2 ml	12 Strip Standard Tubes with flat cap	20.7 mm	80 strips



98 | Strip Caps, PP

- Abdos Strips PCR Caps are manufactured in state of the art precision moulded facility using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber and heavy metal.
- Caps feature ultra-clear surface ideal for fluorescent, luminescent and real time PCR applications.
- · Optically clear caps for real time qPCR.












Code	Capacity	Туре	No. / Case
P10709	0.2 ml	8 Strip Cap Flat Optically Clear	125 strips
P10711	0.2 ml	8 Strip Cap Domed	125 strips

^{*}Strip caps for P10707 will be available on request



99 | PCR Plates Family, PP

- Abdos PCR plates are manufactured in state of the art precision moulded facility using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber and heavy metal.
- Ultra thin and consistent wall thickness allows precise thermal transfer.
- Maximum G-Force 4000 RCF.
- Abdos PCR plates are qPCR compatible.
- DNase, RNase, Endotoxin and PCR inhibitor free.
- Kindly see Thermal Cycler Compatibility Chart on Page No. 91.














Code			No. / Case
P10713	96 Well standard well	Unskirted Standard Well	25 Plates
P10714	96 Well low profile well	Unskirted Low Profile well	25 Plates
P10715	96 Well elevated top well	Unskirted Elevated Top Standard Well	10 Plates
P10722	96 Well semi-skirted low profile well	Semi-Skirted low profile	25 Plates
P10716	96 Well semi-skirted standard well	Semi - Skirted Standard Well	10 Plates
P10723	96 Well fully skirted low profile well	Fully-Skirted Low Profile Well	10 Plates
P10717	384 Well fully skirted well	Fully - Skirted Well	10 Plates

















P10713

P10714

P10715

P10716

P10717

P10722

P10723

100 | Sealing Mats, Silicone

- These mats are made of silicone rubber and designed to seal all PCR plates except P10717.
- The mat is made up of 96 (12 x 8 array) plugs.
- The mat has to be compressed. A plug that caps the individual well seals each well on the PCR plate.

Code	Туре	No. / Case
P10721	Silicone Sealing Mats	50 mats

^{*}These mats are used for sealing all the above PCR plates except P10717.



101 | Sealing Films, Polyester

- Abdos sealing films are optically clear and are suitable for use in real-time PCR applications and PCR plates.
- The film is adhesive coated and sticks to the plate.
- · Abdos sealing films are disposable and for single use only.

Code	Туре	No. / Case
D10710	Clogr Soal Film	100 abouts



102 | Sealing Films, Aluminium

- These sealing films are aluminium hence completely opaque and the end user cannot see the contents in the well. The film is adhesive coated and sticks to the plate.
- These films are readily pierceable either by manual pipette or by liquid handling robot. Once the hole is pierced the film is no longer self sealing.

Code	Туре	No. / Case
P10719	Silver Seal	100 sheets



103 | PCR Workup Rack, PP

- Manufactured in state of the art moulding facility using high purity polypropylene.
- These workup racks can be easily stackable.
- These racks can accommodate unskirted, semi-skirted and skirted 96 well PCR plates. It can also accommodate strip PCR tubes.
- Legs at all four corners make it robust and stable for good grip on the surface.
- These racks have Moulded alphanumeric indexing for fast and accurate identification.
- Operating temperature is -80°C to +121°C.
- · Can be autoclaved.
- Available in colours (Red, Green, Yellow, White & Blue).







104 | PCR workstation rack with lid, PP

- Manufactured in state of the art moulding facility using high purity polypropylene.
- These workstation are easily stackable.
- These racks can accommodate unskirted, semi-skirted and skirted 96 well PCR plates, individual PCR tubes and 0.5, 1.5 & 2.0 ml micro centrifuge tubes.
- These workstations have moulded alphanumeric indexing for fast and accurate identification.
- These workstations are ideal platform to satisfy all pre or post PCR sampling applications.
- Operating temperature is -80°C to +121°C.
- Can be autoclaved.
- Available in colours (Red, Green, Yellow, White & Blue).







THERMAL CYCLER COMPATIBILITY GUIDE for ABDOS 96 & 384 Wellplates

Well Shape		P10713 96 Well, Unskirted Standard Well	P10714 96 Well, Unskirted Low Profile Well	P10715 96 Well, Unskirted, Elevated Top, Standard Well	P10722 96 Well, Semi Skirted, Low Profile Well	P10716 96 Well, Semi Skirted, Standard Well	P10723 96 Well, Fully Skirted, Low Profile Well	P10717 384 Well, Full Skirted, Low Profile Well
Standard well (Overall well height approx 21 mm, Max. capacity > 350L)		•		•		•		
Low Profile well (Overall well height approx 16 mm; Max capacity approx. 200L)			•		•		•	50 μl
Manufacturer	Thermal Cycler Model							
APPLIED BIOSYSTEMS								
Thermal Cyclers	2700	•		•		•		•
	9600	•		•		•		
	9700	•		•		•		•
	9800 "Fast"							
"Real Time" Thermal Cyclers	5700	•				•		
	PRISM 7000	•				•		
	7300	•			•			
	7500	•			•			
	7500 "Fast"							
	7700	•				•		
6	7900HT	•			•			
Sequencers	PRISM 310	•		•		•		
	PRISM 3100	•		•		•		
	3130 (XL)	•		•		•		
	3700	•		•		•		•
	PRISm 3730 (XL)	•		•		•		
AMERSHAM								
Sequencers	Mega BACE 500						•	
	Mega MACE 1000						•	
DEGUMAN	Mega BACE 4000							•
BECKMAN								
Sequencers	CEQ	•						
BIOMETRA								
Thermal Cyclers	Uno	•	•	•		•	•	
	Uno II	•	•	•		•		•
	T1 Thermal Cycler	•	•	•		•	•	•
	Tgradient	•	•	•		•	•	
	Trobot	•	•	•		•	•	•
BIO-RAD / MJ RESEARCH								
Thermal Cyclers	Gene Cycler	•		•				
	PTC -100	•	•	•		•	•	•
	PTC -200	•	•	•		•	•	•
	PTC-225 TETERAD	•	•	•		•	•	•
	DYAD-DYAD Disciple	•	•	•		•	•	•
	iCYCLER	•		•		•	•	
"Pool Time" Thornest Cool	MyCycler	•		•		•		
"Real Time" Thermal Cyclers	OPTICON / OPTICON2	•	•				•	
	Chrome 4		•				•	
	ICYCLER	•		•		•	•	•
	Myiq			•		•	•	
Sequencers	IQ5			•		•	-	
	BaseStation						•	
CORBETT RESEARCH	D 0 1 0/							
Thermal Cyclers	PamCycler 96	•				•		
	PamCycler 384						•	•

Plates to SBS Specifications foot print. Certified Free From DNase, RNase and Detectable DNA.

This chart is intended as a guide only. Abdos cannot accept any liability or responsibility for information given.

PCR is a patented process of Roche Holdings.

THERMAL CYCLER COMPATIBILITY GUIDE for ABDOS 96 & 384 Wellplates

		D46540						
		P10713	P10714	P10715	P10722	P10716	P10723	P10717
		96 Well,	96 Well,	96 Well,	96 Well,	96 Well, Semi	96 Well,	384 Well,
Well Shape		Unskirted Standard Well	Unskirted	Unskirted,	Semi Skirted,		Fully Skirted,	Full Skirte
		Standard Wett	Low Profile Well	Elevated Top, Standard Well	Low Profile Well	Standard Well	Low Profile Well	Low Profi Well
			Wett	Standard Wett	Wett		wett	Well
Standard well								
Standard well (Overall well height approx 21 mm Max. capacity > 350L)		•		•		•		
Low Profile well (Overall well height approx 16 mm; Max capacity approx. 200L)							•	50 μl
Max capacity approx. 200L)			•		•		·	30 M
Manufacturer	Thermal Cycler Model							
EPPENDORF								
Thermal Cyclers	Mastercycler	•	•	•		•	•	
	Mastercycler Gradient	•		•				
	Mastercycler ep	•	•	•		•	•	
	Mastercycler M384							•
"Real Time"Thermal Cyclers	Mastercycler ep Realplex		•				•	
ERICOM								
Thermal Cyclers	Power Block L	•	•	•	•			
	Deltacycler L	•	•	•		•		
	Deltacycler LL	•	•	•	•			
	Single Block Twin Block	•	•	•		•		
ESC0	Iwin Block	•	•	•		•		
L300	Cwift	•		•		•		•
FLEXI	Swift	•		•		•		
Thermal Cyclers	Cono			_		_		
Thermat Cyclers	Gene Genius	•		•		•	•	•
O CTORN	Gerilus	•		•		•	•	
G-STORM	001	•	•	•	•	•		
Thermal Cyclers	GS1 GS4				•			
	GSX	•	•	•	•	•		
	GSXs	•	•	•	•	•		
MWG								
Thermal Cyclers	Primus 96	•	•	•	•	•	•	
,	Primus 384							•
ROCHE								
	Lightcyler 480							•
STRATAGENE								
Thermal Cyclers	Robocycler 96	•				•		
	Robocycler Gradient	•	•	•	•	•	•	
"Real Time"Thermal Cyclers	Mx4000 and Mx 3000	•	•	•	•			
TAKARA								
Thermal Cyclers	TP 240						•	
	TP3000	•	•	•	•	•	•	
TECHNE								
Thermal Cyclers	Touchgene	•	•	•	•	•		
	Cyclogene	•	•	•	•	•		
	Genius	•	•	•	•	•		
	Genius Quad Genius (TC412)	•	•	•	•	•	•	
	Flexigene	•	•	•	•	•	•	•
	Touchgene X	•	•	•	•	•	•	•
	Touchgene Gradient (TC512)	•	•	•	•	•	•	•
	Quantica		•				•	
"Real Time"Thermal Cyclers								
THERMO HYBAID	PCR Sprit	•	•	•	•	•	•	
THERMO HYBAID	PCR Sprit MBS Satalite (Multiblock)	•	•	•	•	•	•	•
"Real Time"Thermal Cyclers THERMO HYBAID Thermal Cyclers								•
THERMO HYBAID	MBS Satalite (Multiblock) System Px2 and PxE		•	•		•		
THERMO HYBAID	MBS Satalite (Multiblock) System Px2 and PxE PCR Express and Omni-E	•	•	•	•	•	•	•
THERMO HYBAID	MBS Satalite (Multiblock) System Px2 and PxE PCR Express and Omni-E Touchdown	•	•	•	•	•	•	•
THERMO HYBAID	MBS Satalite (Multiblock) System Px2 and PxE PCR Express and Omni-E	•	•	•	•	•	•	•

Plates to SBS Specifications foot print. Certified Free From DNase, RNase and Detectable DNA. This chart is intended as a guide only. Abdos cannot accept any liability or responsibility for information given. PCR is a patented process of Roche Holdings.



07ELECTROPHORESIS SYSTEM

MIDI HORIZONTAL UNITS

MAXI HORIZONTAL ELECTROPHORESIS SYSTEMS

VERTICAL DUAL MINI ELECTROPHORESIS SYSTEMS

POWER SUPPLIES & MORE

105 | ABDOS Mini Horizontal Gel Unit

- The system has moulded basic unit with fixed platinum electrode assembly along with Gel running and Gel casting Tray.
- The combs are adjustable by height to offer complete control over loading volume and well depth, upto a maximum of 32 samples throughput.
- Gel length is a short 6 cm ideal for rapid separations.
- The tank is very compact reducing the buffer volume required to cover the gel, providing greater control over the voltage gradient and run-time.



ABDOS-Mini Horizontal Electrophoresis System		
Code	Product	No. / Case
E12100	Mini Horizontal System includes Basic unit with fixed Platinum Electrode Assembly, Gel Running Trays of 6 x 7.5 cm (1 No.), 16 Well ABS comb with 1.5 mm thickness (2 Nos.), Connecting Cord (1 Pair).	1

Spare Accesso	Spare Accessories		
Code	Product	No. / Case	
E12101	Gel Running Tray : 6 X 7.5 cm	1	
E12102	Gel Casting Tray : 6 X 7.5 cm	1	
E12103	16 Well Adjustable Comb	1	
E12104	Connecting Cord for El2100	2	

or contoation.	
Material	ACRYLIC
Unit Dimensions (L x B x H)	14 x 25 x 7 cm
Gel Dimensions (W x L)	6 x 7.5 cm
Buffer Volume	325 ml
Maximum Sample Capacity	32
Adjustable Combs	16 Well Adjustable comb (2 Nos)
Comb Thickness	1 mm, 1.5 mm or 2 mm
Comb Throughput	16 samples
Comb Slots	2
UV Trays	Gel Running Tray with inbuilt Casting Gates
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended Power Supply	E12376 & E12377



106 | ABDOS Mini Plus Horizontal Gel Unit


- The system has moulded basic unit with fixed platinum electrode assembly along with Gel running and Gel casting Tray.
- The combs are adjustable by height to offer complete control over loading volume and well depth, upto a maximum of 80 samples throughput.
- Gel length is a short 10 cm ideal for rapid separations.
- The tank is very compact reducing the buffer volume required to cover the gel, providing greater control over the voltage gradient and run-time.



ABDOS Mini P	ABDOS Mini Plus Horizontal Electrophoresis System		
Code	Product	No. / Case	
E12126	Mini Plus Horizontal System includes Basic unit with fixed Platinum Electrode Assembly, Gel Running Trays of 10 x 11.5cm (1 No.), 20 Well ABS Comb with 1.5 mm thickness (2 Nos.), Connecting Cord (1 Pair)	1	

Spare Accesso	Spare Accessories			
Code	Product	No. / Case		
E12127	Gel Running Tray : 10 X 11.5 cm	1		
E12128	Gel Casting Tray : 10 X 11.5 cm	1		
E12129	20 Well Adjustable Comb	1		
E12130	Connecting Cord for El2126	2		

Material	ACRYLIC
Unit Dimensions (L x B x H)	17 x 23.5 x 7 cm
Gel Dimensions (W x L)	10 x 11.5 cm
Buffer Volume	450 ml
Maximum Sample Capacity	80
Adjustable Combs	20 Well Adjustable comb (2 Nos)
Comb Thickness	1, 1.5 or 2 mm
Comb Throughput	20 samples
Comb Slots	4
UV Trays	Gel Running Tray with inbuilt Casting Gates
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended Power Supply	E12376 & E12377

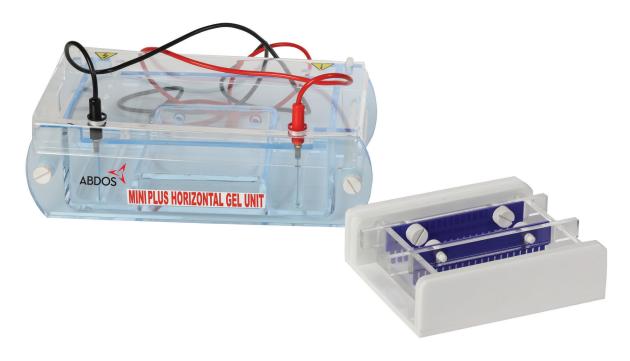

107 | ABDOS Midi Horizontal Gel Unit

- The system has moulded basic unit with fixed platinum electrode assembly along with Gel running and Gel Casting Tray.
- The combs are adjustable by height to offer complete control over loading volume and well depth, up to a maximum of 112 samples throughput.
- Gel length is a short 10 cm ideal for rapid separations.
- The tank is very compact reducing the buffer volume required to cover the gel, providing greater control over the voltage gradient and run-time.



ABDOS-Midi Horizontal Electrophoresis System		
Code	Product	No. / Case
E12151	Midi Horizontal System includes Basic unit with fixed Platinum Electrode Assembly, Gel Running Trays of 12.8 x 15 cm (1 No.), 28 Well ABS Comb with 1.5 mm thickness (2 Nos.), Connecting Cord(1 Pair)	1

Spare Accessories		
Code	Product	No. / Case
E12152	Gel Running Tray : 12.8 X 15 cm	1
E12153	Gel Casting Tray : 12.8 X 15 cm	1
E12154	28 Well Adjustable Comb	1
E12155	Connecting Cord for E12151	2

SPECIFICATION:

Material
Unit Dimensions (L x B x H)
Gel Dimensions (W x L)
Buffer Volume
Maximum Sample Capacity
Adjustable Combs
Comb Thickness
Comb Throughput
Comb Slots
UV Trays
Platinum Electrode
Connecting Cord
Recommended Power Supply

ACRYLIC
21 x 30.5 x 8 cm
12.8 x 15 cm
900 ml
112
28 Well Adjustable comb (2 Nos)
1, 1.5 or 2 mm
28 samples
4
Gel Running Tray with inbuilt Casting Gates
Red and Black (1 Pair)
Red and Black (1 Each)
E12377



108 | ABDOS Maxi Horizontal Gel Unit

- The system has large 20 x 20 cm gel Tray that is ideal for high resolution techniques, such as screening PCR Products and RFLP analysis.
- The combs are height adjustable to offer complete control over loading volume and well depth.
- The system has four comb positions along the tray for fast separation of a maximum of 168 samples.
- The Combs in this system are compatible with Multichannel pipette with a maximum of 42 sample throughput to reduce gel loading time.



ABDOS MAXI Horizontal Electrophoresis System		
Code	List of Power Supply Systems	No. / Case
E12176	Maxi Horizontal System includes Basic unit with fixed Platinum Electrode Assembly, Gel Running Trays of 20 x 20cm (1 No.), 42 Well ABS Comb with 1.5 mm thickness (2 Nos.), Connecting Cord(1 Pair)	1

Spare Accessories		
Code	Product	No. / Case
E12177	Gel Running Tray : 20 X 20 cm	1
E12178	Gel Casting Tray : 20 X 20 cm	1
E12179	42 Well Adjustable Comb	1
E12180	Connecting Cord for E12176	2

Material	ACRYLIC
Unit Dimensions (L x B x H)	26 x 47 x 8.5 cm
Gel Dimensions (W x L)	20 x 20 cm
Buffer Volume	2200 ml
Maximum Sample Capacity	168
Adjustable Combs	42 Well Adjustable comb (2 Nos)
Comb Thickness	1, 1.5 or 2 mm
Comb Throughput	42 samples
Comb Slots	4
UV Trays	Gel Running Tray with inbuilt Casting Gates
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended Power Supply	E12377



109 | ABDOS Maxi Plus Horizontal Gel Unit

- The system has large 25 x 30 cm gel Tray that is ideal for high resolution techniques, such as screening PCR Products and RFLP analysis.
- The combs are height adjustable to offer complete control over loading volume and well depth.
- The system has 12 comb positions at different intervals along the tray for fast separation of a maximum of 624 samples.
- The Combs in this system are compatible with Multichannel pipette with a maximum of 52 sample throughput to reduce gel loading time.



ABDOS-MAXI Plus Horizontal Electrophoresis System		
Code	List of Power Supply Systems	No. / Case
E12201	Maxi Plus Horizontal System includes Basic unit with fixed Platinum Electrode Assembly, Gel Running Trays of 25 x 30 cm (1 No.), 52 Well ABS Comb with 1.5 mm thickness (2 Nos.), Connecting Cord (1 Pair)	1

Spare Accessories		
Code	Product	No. / Case
E12202	Gel Running Tray : 25 X 30 cm	1
E12203	Gel Casting Tray : 25 X 30 cm	1
E12204	52 Well Adjustable Comb	1
E12205	Connecting Cord for El2201	2

SPECIFICATION.	
Material	ACRYLIC
Unit Dimensions (L x B x H)	34 x 57 x 10 cm
Gel Dimensions (W x L)	25 x 30 cm
Buffer Volume	3000 ml
Maximum Sample Capacity	256
Adjustable Combs	52 Well Adjustable comb (6 Nos)
Comb Thickness	1, 1.5 or 2 mm
Comb Throughput	52 samples
Comb Slots	12
UV Trays	Gel Running Tray with inbuilt Casting Gates
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended Power Supply	E12377



110 | ABDOS Vertical Dual Mini Gel System


- The system is a twin plate 8 x 7 cm mini-gel unit designed specifically for PAGE techniques requiring self-cast gels, although precast gels may also be used.
- The system contains standard casting units.
- The system is compatible with standard, 8 x 7cm (W x H) commercially available precast gels.
- Low buffer volume within the inner chamber of the GRM and bottom reservoir economises buffer consumption.
- Combs and spacers available in 0.5 & 1 mm thickness.
- The system has a small footprint area and occupies minimal bench space.



ABDOS Vertical Mini Dual Slab Gel Electrophoresis System		
Code	Product	No. / Case
E12226	Vertical Mini Dual Slab Gel Electrophoresis System - Basic unit includes Dual Vertical Assembly, Glass Plates (Rectangular & Notched): 2 sets, Comb 0.5 mm Thickness (7 wells) - 2 No's, Comb 1 mm Thickness (7 wells) - 2 No's, Spacer 0.5 mm Thickness - 4 No's, Spacer 1.0 mm Thickness - 4 No's, Gel Casting Stand - 1No, Supporting Screws-2 No's, Safety Lid - 1 No, Connecting Cord - 1 Pair	1

Spare Accessories		
Code	Product	No. / Case
E12227	Glass Plates(Notched & Rectangular)	1 set
E12228	Mini Multiple Gel Casting Unit(For 2 Gels)	1
E12229	Teflon Comb 7 well 0.5 mm	1
E12230	Teflon Comb 7 well 0.75 mm	1
E12231	Teflon Comb 7 well 1.0 mm	1
E12232	Teflon Comb 7 well 1.5 mm	1
E12233	Teflon Comb 10 well 0.5 mm	1
E12234	Teflon Comb 10 well 0.75 mm	1
E12235	Teflon Comb 10 well 1.0 mm	1
E12236	Teflon Comb 10 well 1.5 mm	1
E12237	Teflon Spacers 0.5 mm	6
E12238	Teflon Spacers 0.75 mm	6
E12239	Teflon Spacers 1.0 mm	6
E12240	Teflon Spacers 1.5 mm	6
E12241	ACRYLIC Clamp(1 pcs) and Screws(2 pcs)	1 set
E12242	Gel Developing Tray with Gel Holder 8 x 7 cm(05-02)	1
E12243	Glass Plate Stand	1
E12244	Connecting Cords	2

Material	ACRYLIC
Unit Dimensions (L x B x H)	16 x 20 x 15 cm
Upper Buffer Tank Dimension (L x B x H)	70 x 70 x 43 cm
Lower Buffer Tank Dimension (L x B x H)	150 x 130 x 115 cm
Active Gel Dimension (W X H)	8 x 7 cm
Maximum Sample Capacity	14
Recommended Buffer Volume	Upper Tank: 150 ml Lower Tank: 200 ml
Water Circulation Facility	Yes
No. of Combs	7 well Teflon comb 0.5 & 1.0 mm (2 Nos each)
No. of Teflon Spacer	0.5 & 1 mm (4 Nos each)
Glass plates	Notched & Rectangular (2 Sets)
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended power supply	E12377

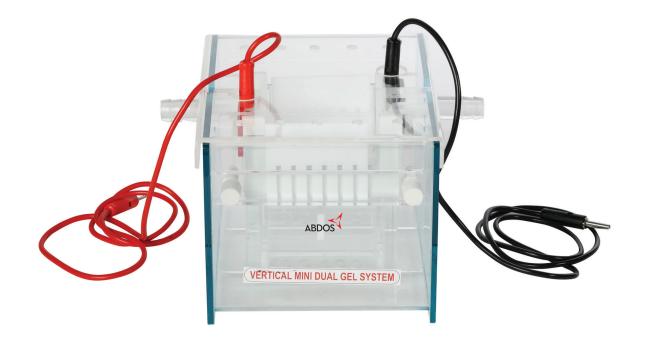

111 | ABDOS Vertical Midi - Gel System

- The system is a single plate 16 x 14 cm midi-gel unit a simple, non-cooled cost-effective solution for low throughput PAGE.
- Low buffer volume within the inner chamber of the GRM and bottom reservoir economises buffer consumption.
- Ventilation holes in the system prevent the build-up of condensation during electrophoresis.
- Combs and spacers available in 0.5, 1.0 and 1.5 $\,$ mm thickness.
- The system has a small footprint area and occupies minimal bench space.



ABDOS Vertical Midi Slab Gel Electrophoresis System			
Code	Product	No. / Case	
E12276	Vertical Midi Slab Gel Electrophoresis Systembasic unit includes Vertical Assembly, Glass plates (Rectangular and Notched): 2 sets, Comb 0.5 mm Thickness (13 wells) – 1 No, Comb 1 mm Thickness (13 wells) – 1 No, Comb 1.5 mm Thickness (13 wells) – 1 No, Spacer 0.5 mm Thickness – 2 No's, Spacer 1.0 mm Thickness – 2 No's, Spacer 1.5 mm Thickness – 2 No's, Gel Casting Stand – 1No, Supporting Screws–2 No's, Safety Lid–1 No, Connecting cord–1 Pair.	1	

Spare Accessories			
Code	Product	No. / Case	
E12277	Glass Plates(Notched & Rectangular)	1 set	
E12278	Regular Multiple Gel Casting Unit(For 2 Gels)	1	
E12279	Gel Developing Tray with Gel Holder for 16 x 14 cm	1	
E12280	Gradient Maker, total Capacity 25 + 25 ml	1	
E12281	Teflon Comb 13 well 0.5 mm	1	
E12282	Teflon Comb 13 well 1.0 mm	1	
E12283	Teflon Comb 13 well 1.5 mm	1	
E12284	Teflon Comb 20 well 0.5,1.0, 1.5 mm	1	
E12285	Teflon Spacers 0.5 mm	1 pack (6 pcs per pack)	
E12286	Teflon Spacers 1.0 mm	1 pack (6 pcs per pack)	
E12287	Teflon Spacers 1.5 mm	1 pack (6 pcs per pack)	
E12288	Teflon Spacers 3.0 mm	1 pack (6 pcs per pack)	
E12289	ACRYLIC Combprep. 3 well 3.0 mm	1	
E12290	ACRYLIC Combprep. 3 well 6.0 mm	1	
E12291	ACRYLIC Clamp (1 pcs) and Screws (2 pcs)	1 pack	
E12292	Lavelling Screws	3	
E12293	Glass Plate Stand	1	
E12244	Connecting Cords	2	



Material	ACRYLIC
Unit Dimensions (L x B x H)	25 x 20 x 27 cm
Upper Buffer Tank Dimension (L x B x H)	140 x 60 x 25 cm
Lower Buffer Tank Dimension (L x B x H)	200 x 60 x 60 cm
Active Gel Dimension (WX H)	16 x 14cm
Maximum Sample Capacity	13
Recommended Buffer Volume	Upper Tank: 150 ml, Lower Tank: 200ml
No. of Combs	13 well Teflon comb, 0.5, 1.0 & 1.5 mm (1 Nos each)
No. of Spacer	0.5, 1 mm & 1.5 mm (4 Nos each)
Glass plates	Notched and Rectangular (2 Sets)
Gasket	Fixed
Clamp & Screws	4 Sets
No. of Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended power supply	E12377

112 | ABDOS Vertical Dual Midi Gel System

- The system is a twin plate 16 x 14 cm midi-gel unit designed specifically for PAGE techniques requiring self-cast gels, although precast gels may also be used.
- The system contains standard casting units.
- The system is compatible with standard, 16 x 14cm (W x H) commercially available precast gels.
- Low buffer volume within the inner chamber of the GRM and bottom reservoir economises buffer consumption.
- Combs and spacers available in 0.5 & 1 mm thickness.
- The system has a small footprint area and occupies minimal bench space.



ABDOS Vertical Midi Dual Slab Gel Electrophoresis System		
Code	Code Product	
E12326	Vertical Midi Dual Slab Gel Electrophoresis System - Basic unit includes Dual Vertical Assembly, Glass Plates(Rectangular & Notched): 2 sets, Comb 0.5 mm Thickness (13 wells) - 2 No's, Comb 1 mm Thickness (13 wells) - 2 No's, Spacer 0.5 mm Thickness - 4 No's, Spacer 1.0 mm Thickness - 4 No's, Gel Casting Stand - 1 No, Supporting Screws - 4 No's, Safety Lid - 1 No, Connecting Cord-1 Pair	1

Spare Accessories		
Code	Product	No. / Case
E12327	Glass Plates(Notched & Rectangular)	1 set
E12328	Regular Multiple Gel Casting Unit(For 2 Gels)	1
E12329	Gel Developing Tray with Gel Holder for 16 x 14 cm	1
E12330	Gradient Maker,total Capacity 25 + 25 ml	1
E12331	Teflon Comb 13 well 0.5 mm	1
E12332	Teflon Comb 13 well 1.0 mm	1
E12333	Teflon Comb 13 well 1.5 mm	1
E12334	Teflon Comb 20 well 0.5,1.0, 1.5 mm	1
E12335	Teflon Spacers 0.5 mm	6
E12336	Teflon Spacers 1.0 mm	6
E12337	Teflon Spacers 1.5 mm	6
E12338	Teflon Spacers 3.0 mm	6
E12339	ACRYLIC Combprep. 3 well 3.0 mm	1
E12340	ACRYLIC Combprep. 3 well 6.0 mm	1
E12341	ACRYLIC Clamp(1) and Screws(2)	1 pack
E12342	Lavelling Screws	3
E12343	Glass Plate Stand	1
E12244	Connecting Cords	2

SPECIFICATION:

Material

Unit Dimensions (L x B x H)	23 x 18 x 27.5 cm
Upper Buffer Tank Dimension (L x B x H)	140 x 70 x 20 cm
Lower Buffer Tank Dimension (L x B x H)	200 x 160 x 190 cm
Active Gel Dimension (W x H)	16 x 14 cm
Maximum Sample Capacity	26
Recommended Buffer Volume	Upper Tank : 250 ml Lower Tank : 500 ml
Water Circulation Facility	Yes
No. of Combs	13 well Teflon comb 0.5 & 1.0 mm (2 Nos each)
No. of Teflon Spacer	0.5 & 1 mm (4 Nos each)
Glass plates	Notched and Rectangula (2 Sets)
Clamp & Screws	4 Sets
No. of Platinum Electrode	Red and Black (1 Pair)
Gasket	Fixed
Connecting Cord	Red and Black (1 Each)
Recommended power supply	E12377

ACRYLIC



113 | Digital Model Power Supply

- It consists of a small Power supply suitable for most Electrophoresis System tanks and applications. The front panel and graphical display are designed for ease of use. The display provides all useful information during runs.
- · Digital Power supplies are the most robust, long lasting and durable electrophoresis power supplies in the market.



FEATURES:

- Operates in constant Voltage and Constant Current Method
- Digital Display for Volt, Current and Timer
- · Runs two gels simultaneously
- Feather Touch Knobs
- Overload protection
- Short Circuit Protection



Code	Product descri	ption	No. / Case
E12376 Digital Power Supply 0-300 V ; 0-100 mA ; 30 W Power supply for 230 V main supply; Two(2) output Terminal		• • •	1
SPECIFIC	ATION:		
Body		MS with Powder Coated Body	
Dimensi	ion (LxWxH)	24 x 16 x 11 cm	
Input		220-240 V,50-60 Hz, AC	
Output '	Voltage	0 to 300 V DC	
Output	Current	0 to 100 mA	
Timer		0 minutes to 9.99 Hrs cut off tim	ner
Input Po	wer Cable	3-Wire Grounded	
Output I	Power	30 W	
Protecti	on	Auto balancing facility for cons (V) and current modes (mA) wand short circuit protection	

Digital display for Volt, Current and Run time

Can run 2 units simultaneously

114 | Microprocessor based Programmable Power Supply

Display

Output Terminal

Code Product description



FEATURES

- Compact and Lightweight
- LCD Digital Display & Digital Control
- · Runs Four Gels simultaneously
- · Short circuit & overload production
- Pause Key function to hold the output power
- · Auto Recovery after Power failure
- Alarm & Memory option



El2377 Microprocessor Based Programable Power Supply 0-300 V; 0-400 mA			1
SPECIFIC	ATION:		
Body		MS with Powder Coated	
Dimens	ion (L x W x H)) 240 x 260 x 120 mm	
Power R	Requirement	220-240 V,50-60 Hz, AC	
Output	Voltage	0 to 300 V	
Output	Current	0 to 400 mA	
Timer		0 minutes to 24 Hrs	
Parame	eters	16 programmable	
Display		LCD Digital Display	
Output	Terminal	4 Parallel (4mm Socket)	



08 MULTIPURPOSE RACKS & BOXES

ROTATOR WORKSTATION

MULTI COMBINATION RACKS

REVERSIBLE RACKS

POLYGRID TEST TUBE RACKS

& MORE

115 | Rotator Workstation, PP

- Abdos rotator workstation is a unique ultimate workstation helping you organize your laboratory work.
- Cube shaped multi-hole rack suitable for different products, has a unique rotate and lock design that helps add or subtract racks according to end user's needs.
- These racks can withstand temperature of -80°C to 121°C.





Code	Tube Capacity	LxWxH	No. / Case
P20208	PCR Tubes & Plates, 0.5ml & 1.5ml & 2.0ml, 15ml & 50ml	108 x 68 x 108 mm	4 (assorted colours)

Product Compatibility chart for Rotatory Workstation:

PRODUCT	NO. PER UNIT	
50 ml Centrifuge Tube	2 per unit	
15 ml Centrifuge Tube	8 per unit	
1.5 ml or 2.0 ml Micro Centrifuge Tube	9 per unit	
0.5 ml Micro Centrifuge Tube	6 per unit	
PCR Plates (unskirted or semi skirted 96 well)	1 per 2 unit locked together	
PCR 8-tube strip	6 per unit	
PCR 12-tube strip	8 per 2 unit	
PCR 0.2 ml tubes	48 per unit	

Assorted colours consist of Blue (B), Green (G), Yellow (Y) & Red (R).



116 | Multi Combination Racks, PP

- Abdos multi combination rack is a unique combination for various tubes and vials.
- Multi-Hole for keeping different products as per own requirement, and has a unique rotate and lock design that helps add or subtract racks according to end user's needs.
- These racks can withstand temperature of -80°C to 121°C.





Code	Tube Capacity	LxWxH	No. / Case
P20209	0.5ml & 1.5ml & 2.0ml, 12 x 75 Tube,	175 x 90 x 65 mm	4 (assorted colours)
	15ml & 50ml		



Product Compatibility chart for Rotatory Workstation:

PRODUCT	NO. PER UNIT
50 ml Centrifuge Tube	4 per unit
15 ml Centrifuge Tube	12 per unit
1.5 ml or 2.0 ml Micro Centrifuge Tube	32 per unit
0.5 ml Micro Centrifuge Tube	32 per unit
RIA Vial 12 x 75 mm (5ml tube)	32 per unit

Assorted colours consist of Blue (B), Green (G), Yellow (Y) & Red (R).



117 | Expanding Tube Rack, PP

- · Abdos Expanding tube racks are designed to reduce sample handling time and the need for several racks when working with samples for cold temperature
- · The opening and closing mechanism allows the rack to expand, creating more space for sample handling. When done, simply collapse the rack back to its compact form and its ready for the freezer.
- Stackable, with alphanemeric well identifications.
- Temperature range of -80°C to 121°C.





Code	Tubes	Capacity	Places	LxWxH	No. / Case
P20230	12 mm	1.5 & 2.0 mL	64	310 x 128 x 335 mm	1
P20231	78 mm & 51 mm	0.5 ml & 0.2 ml	64 - 0.5 ml & 96 - 0.2 ml	310 x 128 x 310 mm	1





118 | Reversible Rack with Cover, PP

- · Manufactured in the state of the art moulding facility using high purity virgin polypropylene.
- Holds 1.5/2.0ml micro centrifuge tubes on one side with smaller positions for the 0.5ml tubes on another side.
- 16 x 5 Array on the 80 Place rack for 0.5, 1.5 & 2.0 ml micro centrifuge tubes and 12 x 8 array On the 96 place rack for 0.5, 1.5 ml & 2.0 ml micro centrifuge tubes.
- Moulding Indexing for easy reference of tubes and vials.





Code	Tubes Capacity	Places	LxWxH	No. / Case
P20206	1.5/2.0 ml & 0.5 ml	96 (12 x 8 Array)	220 x 150 x 50 mm	6
P20206 Assorted	1.5/2.0 ml & 0.5 ml	96 (12 x 8 Array)	220 x 150 x 50 mm	6 (2 pieces of each colour)
P20207	1.5/2.0 ml & 0.5 ml	80 (16 x 5 Array)	240 x 85 x 50 mm	6
P20207 Assorted	1.5/2.0 ml & 0.5 ml	80 (16 x 5 Array)	240 x 85 x 50 mm	6 (2 pieces of each colour)

Add colour of your choice- Green (G), Yellow (Y), Blue (B).



119 | Twisty Tube Rack, PP

- · These racks make dilution and concentration study easier as they can transfer samples between 0.2ml PCR tubes to 0.5, 1.5 and 2.0ml tubes.
- · Can be rotated and customized according to end-user application.
- These racks have tapered wells that securely suspend tubes and makes removal
- · Moulded in indexing for easy retrieval of tubes.
- These Racks can withstand a temperature of -80°C to 121°C.
- Blue section holds 48 (0.5ml) tubes and reverses side holds 48 (1.5ml) tubes whereas purple section holds 96 (0.2ml) tubes and 48 (1.5ml) tubes on the reverse side.





Code	Tube Capacity	Colour	Places	LxWxH	No. / Case
P20210	0.2ml, 0.5ml,	Blue, Purple	0.2 ml - 96	296 x 118 x 34 mm	1 Kit (Blue + Purple)
	1.5ml & 2.0 ml		0.5 ml - 48		
			1.5/2.0 ml - 48		



120 | Frosty Mate™ Storage Racks, PC

- These racks have consistent thermal protection to maintain low temperatures.
- These racks are suitable for storage for PCR reagents, cells, enzymes
 or other temperature sensitive reagents and protecting the critical
 sample from temperature fluctuations.
- · Moulded indexing makes identification faster and easier.
- These racks are available in two temperature range :
 - (a)-20°C unit will maintain a temperature between -10°C & -20°C for up to three hours.
 - (b) 0°C unit will maintain a temperature of 0°C for 5 hours.
- These racks are filled with an inert, non-toxic gel.








-20°C Frosty Mate™ Freezer Storage Racks					
Code	Capacity	Places	LxWxH	No. / Case	
P11104	1.5 - 2.0 ml Micro Tube, 1.0 - 2.0 ml Cryo Tube & 0.5 ml Micro Tube with external attachment	32 (8 x 4 Array)	240 x 120 x 120 mm	1	

C	0°C Fro	sty Mate™ Freezer Storage Racks			
C	Code	Capacity	Places	L x W x H	No. / Case
F	P11105	1.5 – 2.0 ml Micro Tube, 1.0 – 2.0 ml Cryo Tube & 0.5 ml Micro Tube with external attachment	32 (8 x 4 Array)	240 x 120 x 120 mm	1

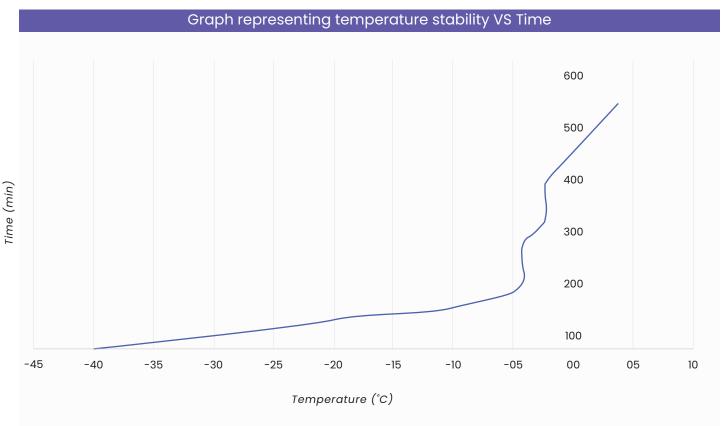

Note - Before use, Frosty Mate™ should be kept for 24 hours at - 40°C temperature deep freeze.

121 | Frosty Mate™ Colour Change Racks, PP

- These racks maintain a temperature of less than 4°C for almost 3.5 hours (with the lid on the rack) at room temperature.
- Frosty Mate[™] can be used for transportation of biological samples, chemicals etc. at a stable temperature for a long time.
- Consistently cooled samples FROSTY MATE[™] colour changes dramatically when the temperature of a rack containing samples reaches below 4°C.
- A clear visible colour change from Green to Yellow.








MCT Freezer Change Racks							
Code	Colour at cold temperature	Colour at warm temperature	Capacity	Places	L x W x H, mm	No. / Case	
P11106	Green	Yellow	1.5 - 2 ml Micro Tube & 0.5 ml Micro Tube with external attachment	24 (6 x 4 Array)	150 x 100 x 75 mm	1	

	PCR Freezer Change Racks, PP							
Code Colour at Colour at cold temperature warm temperature		Capacity	Places	L x W x H, mm	No. / Case			
	P11107	Green	Yellow	PCR tubes / 96 well plates / strip tubes	96 (12 x 8 Array)	150 x 100 x 75 mm	1	

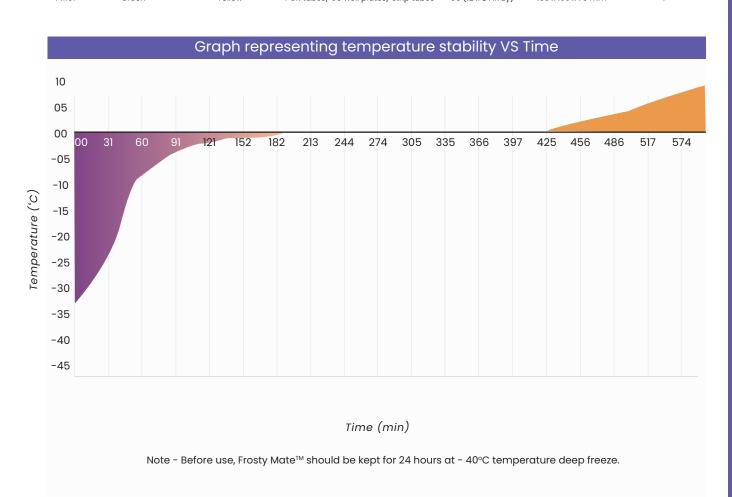

122 | Test Tube Rack, RPP & PC


- Holes are keyed with moulded-in numbers and letters for easy identification.
- Ergonomics design facilitates easy handling.
- Can be used in a wide temperature range.
- Superior chemical resistance.





Test Tube Rack, RPP						
Code	Tube	Places	Colour	LxWxH	No. / Case	
P20701	13 mm	31 Places	White, Yellow, Blue	275 x 65 x 110 mm	4	
P20702	16 mm	31 Places	White, Yellow, Blue	275 x 65 x 110 mm	4	
P20703	20 mm	20 Places	White, Yellow, Blue	324 X 73 X 127 mm	4	
P20704	25 mm	18 Places	White, Yellow, Blue	324 X 73 X 127 mm	4	
P20705	32 mm	12 Places	White, Yellow, Blue	280 X 84 X 127 mm	4	

Test Tube Rack, PC						
Code	Tube	Places	Colour	LxWxH	No. / Case	
P20706	13 mm	31 Places	White, Yellow, Blue	275 x 65 x 110 mm	4	
P20707	13 mm	62 Places	White, Yellow, Blue	275 x 133 x 112 mm	2	
P20708	16 mm	31 Places	White, Yellow, Blue	275 x 65 x 110 mm	4	
P20709	16 mm	62 Places	White, Yellow, Blue	275 x 133 x 112 mm	2	
P20710	20 mm	20 Places	White, Yellow, Blue	324 x 73 x 127 mm	4	
P20711	20 mm	40 Places	White, Yellow, Blue	324 x 143 x 127 mm	2	
P20712	25 mm	18 Places	White, Yellow, Blue	324 x 73 x 127 mm	4	
P20713	25 mm	36 Places	White, Yellow, Blue	324 x 143 x 127 mm	2	
P20714	32 mm	12 Places	White, Yellow, Blue	280 x 84 x 127 mm	4	
P20715	32 mm	24 Places	White, Yellow, Blue	280 x 170 x 128 mm	2	







123 | Double Jumbo Test Tube Rack, RPP

- These innovative double jumbo test tube racks are used for high capacity storage for tubes, vials and vessels.
- Extremely suitable for high throughput labs requiring large sample storage.
- Manufactured from robust, sturdy and lightweight material suitable for easy movement and transport.
- Holes are keyed with moulded-in numbers and letters for easy identification.
- Due to its sheer size, the rack eliminates the risk of using multiple racks.

 Use these racks for storing various grouping samples.






Double Jumbo Test Tube Rack, RPP						
Code	Tube	Places	Colour	LxWxH	No. / Case	
P20441	10 - 13 mm	432 Places	White, Blue	673 x 230 x 80 mm	1	
P20442	13 - 16 mm	240 Places	White, Blue	521 x 260 x 89 mm	1	

Jumbo Test Tube Rack, RPP							
Code	Tube	Places	Colour	LxWxH	No. / Case		
P20443	10 - 13 mm	216 Places	White, Blue	337 x 267 x 91 mm	1		
P20444	13 - 16 mm	120 Places	White, Blue	337 x 267 x 91 mm	1		

Add colour of your choice- White (W), Blue (B).



124 | Polygrid Test Tube Racks, PP

- Manufactured in the state of the art moulding facility using high purity virgin polypropylene (PP).
- Can be used in a wide temperature range.
- · Racks have precise grid and vents.
- Superior chemical resistance.





Code	Tubes	Places	LxWxH	No. / Case
P20716	13 mm	90 Places	248 x 116 x 64 mm	4
P20717	17 mm	60 Places	245 x 118 x 70 mm	4
P20718	21 mm	40 Places	248 x 116 x 70 mm	4

Add colour of your choice- White (W), Blue (B).



125 | Polywire Racks, Delrin

- · Polywire racks are durably moulded in a single continuous piece, so no assembly required and there are no detachable pieces.
- Manufactured from derlin® which is very tough, highly resistant to acids, bases solvents and heat.
- Superior performance to Nylon.
- · Moulded in indexing for easy identification.
- These racks have flat labelling area for easier identification.
- Stable in water bath.
- Can be used in a wide temperature range from 40°C to 140°C.





Polywire Rack Half, Delrin						
Code	Tube	Places	Colour	LxWxH	No. / Case	
P20720	13 mm	36 Places	White, Blue, Red	104 x 104 x 59 mm	4	
P20721	16 mm	36 Places	White, Blue, Red	127 x 127 x 70 mm	4	
P20722	20 mm (15 ml tube)	20 Places	White, Blue, Red	100 x 127 x 83 mm	4	
P20723	25 mm	16 Places	White, Blue, Red	120 x 122 x 92 mm	4	
P20724	30 mm (15 ml tube)	9 Places	White, Blue, Red	110 x 110 x 85 mm	4	



Polywire Rack Full, Delrin					
Code	Tube	Places	Colour	LxWxH	No. / Case
P20725	13 mm	72 Places	White, Blue, Red	104 x 202 x 59 mm	4
P20726	16 mm	72 Places	White, Blue, Red	127 x 250 x 70 mm	4
P20727	20 mm (15 ml tube)	40 Places	White, Blue, Red	100 x 252 x 83 mm	4
P20728	25 mm	40 Places	White, Blue, Red	120 x 300 x 92 mm	4
P20729	30 mm (15 ml tube)	24 Places	White, Blue, Red	110 x 282 x 85 mm	4

Add colour of your choice- White (W), Blue (B), Red (R).



#CommittedtotheEarth



09 BOTTLE & CARBOYS

NARROW MOUTH BOTTLES,
WIDE MOUTH BOTTLES,
ASPIRATOR BOTTLES,
CARBOYS & MORE

126 | Narrow Mouth Bottle Graduated, PP

- These bottles come with inner thread for superior sealing and better security.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- · Complete emptying is guaranteed through inclination of shoulders.







Code	Capacity	Mouth Diameter	Height	No. / case
P11135	4 ml	12.2 mm	39.0 mm	100
P11136	8 ml	17.5 mm	42.3 mm	100
P11137	15 ml	17.5 mm	56.1 mm	100
P11138	30 ml	17.5 mm	60.0 mm	12
P11131	60 ml	17.5 mm	82.4 mm	12
P11132	125 ml	21.0 mm	97.6 mm	12
P11133	250 ml	21.0 mm	130.7 mm	12
P11134	500 ml	24.6 mm	165.5 mm	12



127 | Narrow Mouth Bottle Graduated, LDPE

- These bottles come with inner thread for superior sealing and better security.
- These bottles are used for packing, shipping and storage purposes.
- · Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.
- Suitable for storage of low density liquids.





Code	Capacity	Mouth Diameter	Height	No. / case
P11145	4 ml	12.2 mm	39 mm	100
P11146	8 ml	17.5 mm	42.3 mm	100
P11147	15 ml	17.5 mm	56.1 mm	100
P11148	30 ml	17.5 mm	60 mm	12
P11141	60 ml	17.5 mm	82.4 mm	12
P11142	125 ml	21 mm	97.6 mm	12
P11143	250 ml	21 mm	130.7 mm	12
P11144	500 ml	24.6 mm	165.5 mm	12



128 | Narrow Mouth Bottle Graduated, HDPE

- These bottles come with inner thread for superior sealing and better security.
- These bottles are used for packing, shipping and storage purposes.
- · Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.
- Suitable for storage of low density liquids.





Code	Capacity	Mouth Diameter	Height	No. / case
P11155	4 ml	12.2 mm	39.0 mm	100
P11156	8 ml	17.5 mm	42.3 mm	100
P11157	15 ml	17.5 mm	56.1 mm	100
P11158	30 ml	17.5 mm	60.0 mm	12
P11151	60 ml	17.5 mm	82.4 mm	12
P11152	125 ml	21.0 mm	97.6 mm	12
P11153	250 ml	21.0 mm	130.7 mm	12
P11154	500 ml	24.6 mm	165.5 mm	12



129 | Amber Narrow Mouth Bottle Graduated, HDPE

- These bottles come with inner thread for superior sealing and better security.
- Opaque amber colour reduces UV light transmissions to protect light sensitive
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- · Complete emptying is guaranteed through inclination of shoulders.
- · Suitable for storage of low density liquids.





Code	Capacity	Mouth Diameter	Height	No. / case
P11155 A	4 ml	12.2 mm	39.0 mm	100
P11156 A	8 ml	17.5 mm	42.3 mm	100
P11157 A	15 ml	17.5 mm	56.1 mm	100
P11158 A	30 ml	17.5 mm	60.0 mm	12
P11151 A	60 ml	17.5 mm	82.4 mm	12
P11152 A	125 ml	21.0 mm	97.6 mm	12
P11153 A	250 ml	21.0 mm	130.7 mm	12
P11154 A	500 ml	24.6 mm	165.5 mm	12



130 | Narrow Mouth Bottle (Carboy Type), PP

- · These bottles come with long inner thread for superior sealing and better security.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- · Complete emptying is guaranteed through inclination of shoulders.





Code	Capacity	Mouth Diameter	Height	No. / case
P11127	2000 ml	24.9 mm	248.1 mm	6
P11128	4000 ml	25.6 mm	333 mm	6
P11129	8000 ml	38.3 mm	410 mm	6



131 | Wide Mouth Bottle Graduated, PP

- · These bottles come with inner thread for superior sealing and better security.
- · Wide mouth of bottles allows for easy filling and emptying.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.





Code	Capacity	Mouth Diameter	Height	No. / case
P11160	30 ml	21.2 mm	58.9 mm	12
P11161	60 ml	24.8 mm	81 mm	12
P11162	125 ml	32 mm	94.5 mm	12
P11163	250 ml	32.2 mm	126.7 mm	12
P11164	500 ml	47.5 mm	163.2 mm	12



132 | Wide Mouth Bottle Graduated, LDPE

- These bottles come with inner thread for superior sealing and better security.
- Wide mouth of bottles allows for easy filling and emptying.
- These bottles are used for packing, shipping and storage purposes.
- · Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.





Code	Capacity	Mouth Diameter	Height	No. / case
P11170	30 ml	21.2 mm	58.9 mm	12
P11171	60 ml	24.8 mm	81 mm	12
P11172	125 ml	32 mm	94.5 mm	12
P11173	250 ml	32.2 mm	126.7 mm	12
P11174	500 ml	47.5 mm	163.2 mm	12



133 | Wide Mouth Bottle Graduated, HDPE

- These bottles come with inner thread for superior sealing and better security.
- · Wide mouth of bottles allows for easy filling and emptying.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.





Code	Capacity	Mouth Diameter	Height	No. / case
P11180	30 ml	21.2 mm	58.9 mm	12
P11181	60 ml	24.8 mm	81 mm	12
P11182	125 ml	32 mm	94.5 mm	12
P11183	250 ml	32.2 mm	126.7 mm	12
P11184	500 ml	47.5 mm	163.2 mm	12



134 | Amber Wide Mouth Bottle Graduated, HDPE

- These bottles come with inner thread for superior sealing and better security.
- Opaque amber colour reduces UV light transmissions to protect light sensitive samples.
- · Wide mouth of bottles allows for easy filling and emptying.
- · These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.





	ζ	ζ	3	3
1	2	1		С

Code	Capacity	Mouth Diameter	Height	No. / case
P11180 A	30 ml	21.2 mm	58.9 mm	12
P11181 A	60 ml	24.8 mm	81 mm	12
P11182 A	125 ml	32 mm	94.5 mm	12
P11183 A	250 ml	32.2 mm	126.7 mm	12
P11184 A	500 ml	47.5 mm	163.2 mm	12



135 | Aspirator Bottle with Stopcock, PP

- Aspirator bottles are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP).
- These bottles come with secure sealing cap for better security and long-term storage.
- These bottles are used for storing and shipping reagents, chemicals, culture media, and standards.
- These are very strong and durable for extended use over time with a strong carrying handle.
- Comes with high quality and durable stopcock or tap for easy withdrawal of liquids, chemicals, reagents, culture media and standards.
- Can be used at a temperature below 0°C.
- Superior chemical resistance.







Code	Capacity	Mouth Diameter	Height	No. / case
P11515	5 LTS	51.4 mm	374 mm	1
P11516	10 LTS	51.4 mm	445 mm	1
P11517	20 LTS	51.4 mm	525 mm	1



136 | Carboy, PP

- Abdos Carboys are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP).
- These carboys come with secure sealing cap for better security and long-term storage.
- These carboys are used for storing and shipping reagents, chemicals, culture media, and standards.
- These are very strong and durable for extended use over time with a strong carrying handle on both sides of the carboy.
- Can be used at a temperature below 0°C.
- · Superior chemical resistance.







Code	Capacity	Mouth Diameter	Height	No. / case
P11518	10 LTS	63.8 mm	378 mm	1
P11519	20 LTS	64.2 mm	525 mm	1

137 | Carboy with Stopcock, PP

- Abdos Carboys are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP).
- These carboys come with secure sealing cap for better security and long-term storage.
- These carboys are used for storing and shipping reagents, chemicals, culture media, and standards.
- These are very strong and durable for extended use over time with a strong carrying handle on both sides of the carboy.
- Comes with high quality and durable stopcock or tap for easy withdrawal of liquids, chemicals, reagents, culture media and standards.
- Can be used at a temperature below 0°C.
- Superior chemical resistance.







Code	Capacity	Mouth Diameter	Height	No. / case
P11520	10 LTS	63.8 mm	378 mm	1
P11521	20 LTS	64.2 mm	525 mm	1



138 | Carboy Wide Mouth, PP

- · Abdos Carboys are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP).
- These carboys come with secure sealing cap for better security and long-term storage.
- These carboys are used for storing and shipping reagents, chemicals, culture media, and standards.
- · These are very strong and durable for extended use over time with a strong carrying handle on both sides of the carboy.
- Comes with wide mouth easy withdrawal and refill of liquids, chemicals, reagents, culture media and standards.
- Can be used at a temperature below 0°C.
- Superior chemical resistance.







Code	Capacity	Mouth Diameter	Height	No. / case
P11522	10 LTS	76 mm	378 mm	1
P11523	20 LTS	85 mm	525 mm	1



139 | Heavy Duty Wide Mouth Carboy with Stopcock, HDPE

- Abdos Carboys are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP).
- These carboys come with secure sealing cap for better security and long-term storage.
- · These carboys are used for storing and shipping reagents, chemicals, culture media, and standards.
- These heavy-duty carboys are large with wide mouth capable of handling large volume.
- These are very strong and durable for extended use over time with a strong carrying handle on both sides of the carbov.
- Comes with high quality and durable stopcock or tap for easy withdrawal of liquids, chemicals, reagents, culture media and standards.
- · Superior chemical resistance.





· [](

Code	Capacity	Mouth Diameter	Height	No. / case
P11511	30 LTS	250 mm	440 mm	1
P11512	50 LTS	250 mm	650 mm	1
P11513	100 LTS	250 mm	800 mm	1
P11510	Spare Stopcock	9 mm	NA	1

140 | Spray Bottle, LDPE

- These bottles are used to spray, clean and disinfect bench top space, laminar flow, incubators, bench-top instruments and production floor.
- Can also be used for spraying into areas difficult to access as well as applications in thin layer chromatography.
- Spray bottles have stable smooth operated pump trigger and adjustable spray nozzle that can be regulated from finest mist to precise liquid jet.
- Superior chemical resistance.





121°C

Code	Capacity	No. / case
P11191	500 ml	6
P11192	1000 ml	6
P11200	Spare Pump	1



141 | Dropping Bottle, LDPE

- · These dropping bottles are used for routine storage and pouring applicatations in laboratory.
- These bottles can be squeezed to ensure precise and steady dropping of liquid from the bottle.
- Moulded from high quality virgin low-density polyethylene to ensure excellent results.
- Superior chemical resistance.





Code	Capacity	Mouth Diameter	Height	No. / case
P11301	60 ml	23.6 mm	94.2 mm	12
P11302	125 ml	22.8 mm	101.8 mm	12



142 | Dropping Bottle Euro Type, LDPE

- · These dropping bottles are used for routine storage and pouring applicatations in laboratory.
- These bottles can be squeezed to ensure precise and steady dropping of liquid from the bottle.
- Moulded from high quality virgin low-density polyethylene to ensure excellent results.
- Superior chemical resistance.





Capacity	Mouth Diameter	Height	No. / case
30 ml	17.5 mm	60 mm	12
60 ml	17.5 mm	82.4 mm	12
125 ml	23.6 mm	94.2 mm	12
250 ml	22.8 mm	101.8 mm	12
	30 ml 60 ml 125 ml	30 ml 17.5 mm 60 ml 17.5 mm 125 ml 23.6 mm	30 ml 17.5 mm 60 mm 60 ml 17.5 mm 82.4 mm 125 ml 23.6 mm 94.2 mm



143 | Wash Bottle, LDPE

- Moulded from high quality virgin low-density polyethylene to ensure excellent results.
- · These wash bottles are used for routine storage and pouring applications in the laboratory.
- · These bottles have an internal spray to ensure precise dropping of liquid from the bottle.
- · Superior chemical resistance.





Code	Capacity	Mouth Diameter	Height	No. / case
P11311	250 ml	24 mm	148 mm	12
P11312	500 ml	23.8 mm	173 mm	6



144 | Wash Bottle (Comet), LDPE

- Moulded from high quality virgin low-density polyethylene to ensure excellent results.
- These wash bottles are used for routine storage and pouring applications in the laboratory.
- · These bottles have an internal spray to ensure precise dropping of liquid from the bottle.
- These bottles are ideal for Distilled water and suitable for foodstuff.



Code	Capacity	Mouth Diameter	Height	No. / case
P11313	250 ml	28.2 mm	134.5 mm	12
P11314	500 ml	28.2 mm	165.7 mm	12





10 GENERAL LABORATORY PRODUCTS

VOLUMETRIC FLASKS & DESSICATORS
BIOHAZARD & AUTOCLAVE DISPOSABLE BAGS
GLOVES & SAFETY GOGGLES
& MORE

145 | Beakers Without Handle, PP & TPX

- Manufactured in state of the art moulding facility using high purity virgin polypropylene (PP) & polymethylpentene (TPX).
- PP Material conforming to US FDA 21 CFR.
- TPX Material has distinct advantage of high transparency & chemical resistivity, also has higher thermal withstand capacity over PP beakers.
- Tapered stacking style saves space and makes it easy to handle.
- All sizes have easy to read silk-screened graduations.
- Precise pouring spouts.















Beakers W	Beakers Without Handle, PP				
Code	Capacity	Height	No. / case		
P50601	50 ml	59 mm	12		
P50602	100 ml	73 mm	12		
P50603	250 ml	94 mm	12		
P50604	500 ml	128 mm	6		
P50605	1000 ml	150 mm	4		
P50606	2000 ml	192 mm	4		
P50607	5000 ml	263 mm	2		
P50608	10000 ml	328 mm	1		



Beakers Without Handle, TPX					
Code	Capacity	Height	No. / case		
P50701	50 ml	59 mm	12		
P50702	100 ml	73 mm	12		
P50703	250 ml	94 mm	12		
P50704	500 ml	128 mm	6		
P50705	1000 ml	150 mm	4		
P50706	2000 ml	192 mm	4		
P50707	5000 ml	263 mm	2		
P50708	10000 ml	328 mm	1		

146 | Beakers With Handle, PP & TPX













Beakers With Handle, PP					
Code	Capacity	Height	No. / case		
P50802	100 ml	73 mm	6		
P50803	250 ml	94 mm	6		
P50804	500 ml	128 mm	6		
P50805	1000 ml	150 mm	4		
P50806	2000 ml	192 mm	4		
P50807	5000 ml	263 mm	2		
P50808	10000 ml	330 mm	1		



Beakers With Handle, TPX					
Code	Capacity	Height	No. / case		
P50902	100 ml	73 mm	6		
P50903	250 ml	94 mm	6		
P50904	500 ml	128 mm	6		
P50905	1000 ml	150 mm	4		
P50906	2000 ml	192 mm	4		
P50907	5000 ml	263 mm	2		
P50908	10000 ml	330 mm	1		

147 | Measuring Cylinder, PP Class "B"

- Moulded-in large easy to read graduation.
- Moulded-in from highest quality translucent virgin polypropylene.
- · Cylinders have generous pour spout for smooth flow of liquid during pouring.
- · Hexagonal shape gives stability to the base.











Code	Capacity	Sub division	Eerror Limit	Height	No. / Case
P50301	10 ml	0.2 ml	± 0.2 ml	138 mm	12
P50302	25 ml	0.5 ml	± 0.5 ml	170 mm	12
P50303	50 ml	1 ml	± 1 ml	198 mm	12
P50304	100 ml	1 ml	± 1 ml	257 mm	6
P50305	250 ml	2 ml	± 2 ml	314 mm	6
P50306	500 ml	5 ml	± 5 ml	344 mm	3
P50307	1000 ml	10 ml	± 10 ml	412 mm	3
P50308	2000 ml	20 ml	± 20 ml	482 mm	3



148 | Measuring Cylinder, TPX Class "B"

- These transparent graduated cylinders have excellent value.
- Moulded in large neat and easy to read graduations.
- · Hexagonal shape gives stability to the base.
- · Cylinders have generous pour spout for smooth flow of liquid during pouring.











Code	Capacity	Sub division	Eerror Limit	Height	No. / Case
P50401	10 ml	0.2 ml	± 0.2 ml	138 mm	12
P50402	25 ml	0.5 ml	± 0.5 ml	170 mm	12
P50403	50 ml	1 ml	± 1 ml	198 mm	12
P50404	100 ml	1 ml	± 1 ml	257 mm	6
P50405	250 ml	2 ml	± 2 ml	314 mm	6
P50406	500 ml	5 ml	± 5 ml	344 mm	3
P50407	1000 ml	10 ml	± 10 ml	412 mm	3
P50408	2000 ml	20 ml	± 20 ml	482 mm	3



149 | Measuring Cylinder, TPX Class "A"

- These transparent graduated cylinders have excellent value.
- Moulded in large neat and easy to read graduations.
- Hexagonal shape gives stability to the base.
- Cylinders have generous pour spout for smooth flow of liquid during pouring.
- Meet accuracy requirements of class A under "DIN 12681/ISO 6706".
- · Supplied with conformity test certificate that indicates batch number and year of production that is also marked on the cylinder.











Code	Capacity	Sub division	Eerror Limit	Height	No. / Case
P50501	10 ml	0.2 ml	± 0.1 ml	138 mm	1
P50502	25 ml	0.5 ml	± 0.25 ml	170 mm	1
P50503	50 ml	1 ml	± 0.5 ml	198 mm	1
P50504	100 ml	1 ml	± 0.5 ml	257 mm	1
P50505	250 ml	2 ml	± 1 ml	314 mm	1
P50506	500 ml	5 ml	± 2.5 ml	343 mm	1
P50507	1000 ml	10 ml	± 5 ml	412 mm	1
P50508	2000 ml	20 ml	± 10 ml	482 mm	1



150 | Volumetric flask. TPX, Class B

- These Volumetric Flasks are manufactured from the medical grade TPX polymer conforming to 21 CFR free of heavy metal and natural rubber.
- These Flasks are made from Glass like TPX offering excellent clarity.
- These Volumetric Flask Come with polypropylene stopper.
- Meet accuracy requirements of class B under "ISO 1042".
- These flasks are recommended to be washed at max 60°C.
- · Can be autoclaved.









Code	Capacity	Error Limit	Bulb Diameter	Height with stopper	Neck Size	No. / Case
P50101	25 ml	±0.08 ml	40 mm	115 mm	10/19	1
P50102	50 ml	±0.12 ml	50 mm	150 mm	12/21	1
P50103	100 ml	±0.20 ml	60 mm	180 mm	14/23	1
P50104	250 ml	±0.30 ml	80 mm	235 mm	19/26	1
P50105	500 ml	±0.50 ml	100 mm	270 mm	19/26	1
P50106	1000 ml	±0.80 ml	125 mm	310 mm	24/29	1



151 | Volumetric flask. TPX, Class A

- These Volumetric Flasks are manufactured from the medical grade TPX polymer conforming to 21 CFR free of heavy metal and natural rubber.
- These Flasks are made from Glass like TPX offering excellent clarity.
- These Volumetric Flask Come with polypropylene stopper.
- Meet accuracy requirements of class A under "ISO 1042".
- Supplied with conformity test certificate that indicates batch number & year of production.
- These flasks are recommended to be washed at max 60°C.
- · Can be autoclaved.









Code	Capacity	Error Limit	Bulb Diameter	Height with stopper	Neck Size	No. / Case
P50201	25 ml	±0.04 ml	40 mm	115 mm	10/19	1
P50202	50 ml	±0.06 ml	50 mm	150 mm	12/21	1
P50203	100 ml	±0.10 ml	60 mm	180 mm	14/23	1
P50204	250 ml	±0.15 ml	80 mm	235 mm	19/26	1
P50205	500 ml	±0.25 ml	100 mm	270 mm	19/26	1
P50206	1000 ml	±0.40 ml	125 mm	310 mm	24/29	1



152 | Drying Rack, SS

- These Drying Racks are used for draining and drying test tubes, beakers, flasks & other labware.
- There are 55 pegs in the rack, 50 smaller pegs for products with small diameter & 5 large brackets are designed to hold Erlenmeyer flasks, beakers, etc.
- These pegs are plastic coated for better protection.
- The racks come with a tray at the bottom in order to avoid drops on the surface or table.

Code	Places	L x W x H	No. / Case
P20302	55 places	360 x 160 x 650 mm	1



153 | Scoop, HDPE

- These scoops are used for withdrawal and movement of solid, granulates, gels and other samples.
- · Round bottom for better use.
- With precise formed filling edge and comfortable, stable and robust handle.
- · Natural in colour.
- Superior chemical resistance.



Code	Capacity	Total Length	No. / Case
P11901	100 ml	180 mm	12
P11902	250 ml	240 mm	12
P11903	500 ml	300 mm	6
P11904	1000 ml	360 mm	6
P11905	2500 ml	400 mm	3



154 | Dual Purpose Scoop, PS

- ABDOS Dual purpose Scoop is designed to combine the function of a scoop, weigh boat, and funnel to make this product economically beneficial.
- These Scoops are made from high quality anti-static polystyrene that is waterproof and reduces the probability of materials sticking to the scoop.
- These scoops have locking tabs that help to retain materials.
- These scoops can withstand powders, gels, and semi-solids.
- The broad tip design keeps the scoop stable while on the scale and enables materials to be easily scooped and dispensed.
- The dosage requirements for electron beam sterilization that results in sterilized products is determined by procedures that are compliant with ISO 11137.







Code	Size	Dimension	Color	No. / Case
P11907	Large	127 x 90 mm	White	100
P11908	Small	127 x 63 mm	White	100



155 | Conical Flask, PP

- Moulded from high quality virgin Polypropylene to ensure excellent results.
- These Conical Flasks are used for routine storage and pouring applications in the laboratory.

No. / case

12

12

 These Flasks have a screw cap designed with inner thread for superior sealing and better security.



P11621

P11622





250 ml

500 ml

121°C	
Code	Capacity
P11620	125 ml



156 | Plain and Vacuum Dessicator

Plain Dessicator

- Dessicators are enclosures containing desiccants for preserving moisture sensitive products.
- These dessicators are moulded-in from high quality plastics which is light and easy to handle.
- Silicone O-ring assures tight seal down to 0°C without using grease.
- · Bottom part of the dessicators comes with thick perforated polypropylene disc with big holes in the middle for easy lifting.
- Use with disposable or reusable desiccant.
- Bottom part of the dessicators is white in color.

Vacuum Dessicator

- · Vacuum dessicator are moulded in high quality plastics which is light and easy to handle.
- Silicone O-ring assures tight seal down to 0°C without using grease.
- Polypropylene stopcock with PTFE.
- · Bottom part of the dessicators comes with thick perforated polypropylene disc with big holes in the middle for easy lifting.
- Bottom part of the dessicator is transparent in all clear vacuum dessicator.



Plain Dessicator
(PP/PC)



Vacuum Dessicator
(PP/PC)



All Clear Vacuum Dessicator
(PC/PC)

Code	Product	Plate Diameter	Inside Diamter	Flange Outer Diameter	Overall Height	No. / Case
E11601	Plain Dessicator	150 mm	145 mm	170 mm	210 mm	1
E11602	Plain Dessicator	200 mm	195 mm	230 mm	270 mm	1
E11603	Plain Dessicator	250 mm	240 mm	275 mm	330 mm	1
E11604	Plain Dessicator	300 mm	297 mm	338 mm	410 mm	1
E11605	Vacuum Dessicator	150 mm	145 mm	170 mm	210 mm	1
E11606	Vacuum Dessicator	200 mm	195 mm	230 mm	270 mm	1
E11607	Vacuum Dessicator	250 mm	240 mm	275 mm	330 mm	1
E11608	Vacuum Dessicator	300 mm	297 mm	338 mm	410 mm	1
E11609	All Clear Vacuum Dessicator	150 mm	145 mm	170 mm	210 mm	1
E11610	All Clear Vacuum Dessicator	200 mm	195 mm	230 mm	270 mm	1
E11611	All Clear Vacuum Dessicator	250 mm	240 mm	275 mm	330 mm	1
E11612	All Clear Vacuum Dessicator	300 mm	297 mm	338 mm	410 mm	1

SPARE ACCESSORIES FOR ALL DESICCATOR				
Code	Product	No. / Case		
E11620	Stop Cock for Vacuum Dessicator	1		
E11621	Silicone Ring for 150 mm Dessicator	1		
E11622	Silicone Ring for 200 mm Dessicator	1		
E11623	Silicone Ring for 250 mm Dessicator	1		
E11624	Silicone Ring for 300 mm Dessicator	1		

157 | Vacuum Guage Round / Cubic Dessicator

- These vacuum dessicators feature a round design with light weight yet high tensile strength.
- Maximum vacuum of 1 Torr (1.33 x 10-4 Mpa) for 72 hours.
- · High quality silicone gasket ensures greaseless airtight seal for cost effective and clean test environment.
- Highly transparent, shatterproof, non-corrosive, and easy to clean polycarbonate construction.
- Three-way stopcock ensures consistent and uniform vacuum draw, vacuum release, or gas exchange. The barbed fitting on each side secures attachment of tubing.
- Flange lock holds the top and the bottom together during non-vacuum conditions.
- · UV-blocking model minimizes damage and discoloration of light-sensitive samples.
- In Vacuum Gauge Round Dessicator, vacuum gauge is attached at the centre of the lid while it is attached at the front door in Vacuum Gauge Cubic Dessicator.



Vacuum Guage Round Dessicator



Vacuum Guage Cubic Dessicator

Code	Capacity	DxH	Colour	No. / Case	Code	Capacity	WxDxH	Colour	No. / Case
E11617	6 LTS	242 x 354 mm	Natural	1	E11613	11 LTS	322 x 285 x 271 mm	Natural	1
E11617 A	6 LTS	243 x 354 mm	Amber	1	E11613 A	11 LTS	323 x 285 x 271 mm	Amber	1
E11618	10 LTS	308 x 400 mm	Natural	1	E11614	23 LTS	420 x 397 x 281 mm	Natural	1
E11618 A	10 LTS	308 x 400 mm	Amber	1	E11614 A	23 LTS	421 x 397 x 281 mm	Amber	1
E11619	20 LTS	385 x 475 mm	Natural	1	E11615	35 LTS	420 x 397 x 381 mm	Natural	1
E11619 A	20 LTS	385 x 475 mm	Amber	1	E11615 A	35 LTS	421 x 397 x 381 mm	Amber	1
					E11616	45 LTS	420 x 397 x 491 mm	Natural	1
					E11616 A	45 LTS	421 x 397 x 491 mm	Amber	1

SPECIFICATIONS:

Code	E11617 & E11617 A	E11618 & E11618 A	E11619 & E11619 A	E11613 & E11613 A	E11614 & E11614 A	E11615 & E11615 A	E11616 & E11616 A
Internal Volume	6 L / 0.2 cu ft	10 L / 0.4 cu ft	20 L / 0.7 cu ft	11 L / 0.4 cu ft	23 L / 0.8 cu ft	35 L / 1.2 cu ft	45 L / 1.6 cu ft
Guage Range	0 to -0.1 Mpa	0 to - 0.1 Mpa	0 to - 0.1 Mpa	0 to -0.1 Mpa			
Nozzle Diameter	9.5 mm / 0.37 inch	9.5 mm / 0.37 inch	9.5 mm / 0.37 inch	9.5 mm / 0.37 inch			
Max. Permissible Vacuum	1.33 x 10-4 Mpa	1.33 x 10-4 Mpa	1.33 x 10-4 Mpa	1.33 x 10-4 Mpa			
Max Load per shelf	-	-	-	3 Kg	5 Kg	5 kg	5 kg
Number of Shelves	-	-	-	2 standard / 4 maximum	2 standard / 4 maximum	3 standard / 5 maximum	3 standard / 6 maximum
Material - Body	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Material - Perforated Sample Tray	Polypropylene	Polypropylene	Polypropylene	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Material - Drying Agent Tray / Locker	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene
Material - Vacuum Seal	Silicone Rubber	Silicone Rubber	Silicone Rubber	Silicone Rubber	Silicone Rubber	Silicone Rubber	Silicone Rubber
Dimension - Interior(W x D x H)	-	-	-	248 x 254 x 238 mm	346 x 365 x 246 mm	355 x 375 x 345 mm	355 x 374 x 445 mm
Dimension - Exterior (Dia X H)	242 x 354 mm	308 x 400 mm	385 x 475 mm	-	-	-	-
Dimension - Exterior(W x D x H)	-	-	-	322 x 285 x 271 mm	420 x 397 x 281 mm	420 x 397 x 381 mm	420 x 397 x 491 mm
Net Weight	1.5 Kg	2.5 Kg	4.2 Kg	4.2 Kg	8.2 Kg	10.8 Kg	12.2 Kg

E11617 A, E11618 A, E11619 A, E11613 A, E11614 A, E11615 A, E11615 A, E11616 A codes are translucent (Amber colour) Vacuum dessicators with Ultra Violet block effect. All models come with vacuum gauge.

158 | Funnel, PP

- Designed specifically for analytical chemistry.
- Each size takes a standard size filter paper.
- The body of the funnel is 60° angle.
- · Provided with external and internal ribs.









Code	Size Diameter	Internal Diameter	Stem Length	No. / Case
P70314	50 mm	50 mm	50 mm	72
P70315	62 mm	62 mm	67 mm	36
P70316	75 mm	75 mm	77 mm	36
P70317	100 mm	100 mm	95 mm	36



159 | Powder Funnel, PP

- These Powder Funnels are used for transferring material in narrow bottles without spillage.
- Various sizes for different container sizes and volumes.
- Moulded from high quality virgin Polypropylene to ensure excellent results.









Code	Internal Diameter	No. / Case
P70318	65 mm	36
P70319	80 mm	36
P70320	100 mm	36



160 | Separatory Funnel, PP

- ABDOS Separatory funnel is moulded from high quality virgin Polypropylene to ensure excellent clarity and strength.
- This Funnel is pear shaped and has screw cap for superior sealing and leak proof.
- This funnel comes with PTFE plug for easy usage.
- · Push Fit Plugs make the assembly easy and convenient.







Code	Capacity	No. / Case
P70321	125 ml	2
P70322	250 ml	2
P70323	500 ml	2



161 | Funnel Holder, PP

- These are corrosion free and can hold funnels with diameter 3 in to 6 in.
- Extra plate provided can be placed to hold funnels with diameter 1 in to 3 in.
- Two tapered wedges are provided to have a firm grip on rods.



Code	Places	No. / C
P70311	Single	12
P70312	Double	6



162 | Separatory Funnel Holder, PP

- These are corrosion free with a front opening that allows a clear view of the solution and allows unobstructed placement of separating funnels.
- Two tapered wedges are provided to have a firm grip on rods.



Code	Places	No. / Case
P70313	Single	12



163 | Retort Stand, PP/PE Coated Rod

- Retort stand is used to attach clamp that holds test tubes and other equipment like burettes.
- It is used for titration, distillation and filtering of samples.
- It is available in both central and side holes.
- · Base of the stand is PP and the rod is coated in PE.

Code	L x B, mm	Height of Rod	No. / Case
P70211	225 x 150 side hole	750 mm	1
P70212	300 x 200 centre hole	750 mm	1
P70213	301 x 200 side hole	750 mm	1



164 | Burette Clamp, PP

- Burette clamps are used to hold burettes, test tubes, etc.
- Completely corrosion proof as it is moulded in polypropylene.
- Spring-loaded jack in the middle provides grip to the burette and prevents it from slipping.
- Two tapered wedges are provided to ensure firm grip on the rods.
- Available in both single and double clamp.

Code	Places	No. / Case
P70601	Single	12
P70602	Double	6



165 | Assorted Workstation storage Bin, ACRYLIC

- Users can organize most of their commonly used laboratory disposables in one location.
- First section of the bins can be used to store tubes, vials, pipette tips, hair cap or masks.
- Second section of the bin is used to store and dispense tissue paper, kimwipes and Parafilm M (supplied with super-sharp serrated blade).
- · Third section of the bin is used to store and dispense gloves.

Code	No. of Compartment	LxWxH	No. / Case
P70104	5	255 x 135 x 368 mm	1



166 | Workstation storage/ Dispenser Bin, ACRYLIC

- Ideal for storing and dispensing small laboratory product such as Pipette tips, Pasteur Pipette, Micro Centrifuge Tubes.
- Removable top cover allows easy filling in to the box.
- Hinged opening at the front to take out items from the bin.
- Holes at the back of the bin help it to be placed or stuck on to the wall.

Code	Size	LxWxH	No. / Case
P70101	Small	200 x 140 x 190 mm	1
P70102	Large	200 x 140 x 275 mm	1



167 | Animal Cage, PP/SS

- · These provide excellent shelter for animal species in the laboratory.
- Metallic top provides good ventilation and provides for feeding the animal species.
- Excellent chemical resistance.





Code	Places	LxWxH	No. / Case
P20501	Single Grill	290 x 220 x 140 mm	1
P20502	Single Grill	430 x 270 x 150 mm	1
P20503	Twin Grill	290 x 220 x 140 mm	1
P20504	Twin Grill	430 x 270 x 150 mm	1



168 | Water Bottle for Animal Species, PP/SS

- These narrow mouth bottles come with attached stainless steel pipe for release of liquid.
- Easy to fill, empty and wash.
- · Leak proof.





Code	Capacity	Mouth Diamter	Height	No. / Case
P20511	125 ml	290 x 220 x 140 mm	97.6 mm	12
P20512	250 ml	430 x 270 x 150 mm	130.7 mm	12



169 | Utility Tray

- Moulded from high quality virgin Polypropylene to ensure excellent results.
- · These Utility Trays are used for routine washing and keeping labware and transporting material.
- This tray is designed for easy grip and handling heavy loads.







121°C				
Code	LxWxH	No. / Case		
P90115	350 x 275 x 75 mm	10		
P90116	360 x 310 x 130 mm	6		



170 | Biohazard Disposable Bags, PP

- Polypropylene bags include black biohazard symbol and precautionary procedures printed in four languages (English, Spanish, French, German) for added safety.
- These bags are easy to open and close and used to dispose biohazard waste and other plastic laboratory disposables.
- High temperature steam autoclavable to 135°C (275°F).
- Pass ASTM 1922 Tear Resistance and ASTM 1709 Dart Impact Tests.



			l
Code	WxL	Colour	No. / Case
U40105	12 x 18 inches	Red, Yellow & Natural	200
U40106	12 x 24 inches	Red, Yellow & Natural	200
U40107	16 x 24.5 inches	Red, Yellow & Natural	200
U40103	18 x 22 inches	Red, Yellow & Natural	200
U40104	25 x 35 inches	Red, Yellow & Natural	200
U40114	24 x 31.5 inches	Red, Yellow & Natural	100
U40120	42 x 42 inches	Red, Yellow & Natural	100





171 | Autoclavable Bags, PP

- These polypropylene autoclave bags made of 2 mil thickness are used for discarding used petri dishes, membrane filters, cell culture flasks, pipettes, culture plates & other plastic products.
- These bags are transparent.



Code	WxL	No. / Case
U40112	8 x 12 inches	100
U40113	12 x 24 inches	100
U40108	16 x 18 inches	100
U40109	16 x 24 inches	100



172 | Transport/ Resealable Bags with Zip Lock, PE

- These Bags can be used to store and ship samples, solids and food/suitable for use with food.
- Though it can be used for all applications it is especially used in food, water, forensic science and quality control laboratory.
- Using the rim and channel closure the bag can be closed by finger pressure and reopened repeatedly.
- Content stored in the bag would be dust free and free of contaminates.

Code	WxL	No. / Case
U40110	9.8 x 10.2 inches	100
U40111	13 x 13.35 Inches	100



173 | Sharp Container, PP

- A complete Line of Containers for needle, sharps and cutting waste, hospital waste.
- · Secure lock on lid makes it safe to discard with sharp waste.
- · Special design on lid makes it user-friendly to use with one hand while disposing sharp needles.
- · Opening design inhibits hand entry to reduce the risk of needle stick when disposing sharps.
- · Clear top and translucent containers allow you to monitor the fill level.
- Puncture-resistant, durable polypropylene, can be autoclaved or incinerated.
- · Clearly marked with biohazard label.



Code	Capacity(ml)	No. / Case
P50111	800 ml	40
P50112	1200 ml	60
P50113	3000 ml	60
P50114	5000 ml	60



174 | Parafilm M Dispenser, ACRYLIC

- Ideal for storing, dispensing and cutting Parafilm® M tape and labels.
- · Openable top lid allows easy filling into the Dispenser.
- These dispensers can hold both 2 inches and 4 inches Rolls.
- · Tapes and Labels can be easily cut through super-sharp serrated blade.

Code	Capacity	LxWxH	No. / Case
P70401	2 inch & 4 inch	180 x 120 x 160 mm	1

^{*} Dispenser does not include Parafilm M



175 | Parafilm M Dispenser, ABS

- Ideal for storing, dispensing and cutting Parafilm® M tape and labels.
- · Openable top lid allows easy filling into the Dispenser.
- These dispensers can hold both 2 inches and 4 inches Rolls.
- · These dispensers are designed with safety razor that sides and cuts with no danger to fingers.

Code	Capacity	LxWxH	No. / Case
P70402	2 inch & 4 inch	156 x 120 x 156 mm	1

^{*} Dispenser does not include Parafilm M



176 | Safety Goggles, PC

- · Polycarbonate lens with side shield.
- Impact resistant and lightweight frames for comfortable eyewear.
- 99.9% UVA/UVB protection.
- U50103 are best suitable for the complete protection of the eye.
- U50104 can be worn over spectacles for complete protection of the eyes.

No. / Case
2
2
2



177 | Safety Goggles Box, ACRYLIC

- This safety box can be set on the bench top or mounted on the wall for storage of googles, glasses and other small lab products.
- Safety Lid keeps the box free of dust and contamination.
- Clear window helps to view the inventory from the outside.

Code	LxWxH	Size	No. / Case
P70106	23 x 16 x 18 cm	Small	1
P70107	23 x 16 x 25 cm	Large	1



178 | Safety Face Shield, PC

- Clear face shield of polycarbonate provides high impact and splash protection.
- · Ratched adjustment on the headgear provides comfortable fit.

Code	LxWxH	No. / Case
U40102	15.5 x 8 x 0.04 inches	1



179 | Abdos Brand - Derma Guard Blue Nitrile Gloves - 9.5 Inches Length

- These gloves are the ideal product to protect you from exposure to bacteria, viruses and chemicals. They also enhance your ability to offer maximum security against cross-contamination.
- Its unique blue color provides quick, visual differentiation from natural rubber latex and other synthetic gloves.
- Ambidextrous, textured fingertips and beaded cuff enhanced wet and dry grip.
- · Custom design enhances comfort and fit.
- These gloves are powder free, minimizing the potential for powder related complications.
- Conforms to ASTM D6319 and EN 455 Standards.

Code	Sizes	No. / Pack	No. / Case
U20447	X Small	100	1000
U20341	Small	100	1000
U20342	Medium	100	1000
U20343	Large	100	1000
U20448	X Large	100	1000



180 | Abdos Brand - Derma Guard White Latex Gloves - 9.5 Inches Length

- These gloves are the ideal product to protect you from exposure to bacteria, viruses and chemicals. They also enhance your ability to offer maximum security against cross-contamination.
- Ambidextrous, textured fingertips and beaded cuff enhanced wet and dry grip.
- Softness provides superior comfort and natural fit.
- These gloves are powder free, minimizing the potential for powder related complications, irritation and dermatitis.
- Lower level of extractable proteins and chemical residue, hence lower incidences of allergic reactions.
- · Conforms to ASTM D6319 and EN 455 Standards.

Code	Sizes	No. / Pack	No. / Case
U20449	X Small	100	1000
U20344	Small	100	1000
U20345	Medium	100	1000
U20346	Large	100	1000
U20450	X Large	100	1000



181 | Glove Box Holder, ACRYLIC

- · They designate a place for gloves.
- · Clear and pristine holder to give clean appearance.
- Top loading of the glove box.
- Easy to dispense the gloves through the holder.
- Each holder has holes that help it to be installed in a convenient location to the proximity of your work and tasks.

Code	No. of places	LxWxH	No. / Case
P70301	1	260 x 100 x 138 mm	1
P70302	2	260 x 100 x 270 mm	1
P70303	3	260 x 100 x 415 mm	1



182 | Abdos N95 Respirator Mask

- These masks are disposable respirators that provide protection from particulates.
- Bacterial Filtration Efficiency ≥95% approved as per guidelines.
- Confirm Minimum Splash Resistance Pressure.
- · Satisfy all regulations of all accredited NABL labs.
- Particulate Filtration Efficiency ≥95% Confirms FFP2 as BIS:
 IS: 9473-2002 With / Without Expiratory Valve.



Code	Description	Colour	No. / Case
U20417A	N95 Mask	Grey/White	100
U20418A	N95 Mask with Exhalation Valve	Grey/White	100



183 | PPE Kit

Coverall Body Suit with Heat Seal Taped

- Impermeable to blood and body fluids. Thumb / Finger loops to anchor sleeves in place.
- 90 GSM, Single Use. ISO 16603:2004 Certified.
- Free Size suitable for all fits. Colors available: White / Blue.
- Elasticated Hood, Wrist & Ankle.

Gloves

- · Nitrile, Non Sterile, Powder Free.
- Sizes 6.5, 7 & 7.5 can be supplied.

Shoe Cover

- Made up of the same fabric of coverall, 100 GSM.
- Reaches above ankles.

Goggles

- Comes with transparent glass, zero power, well fitting, covered from all sides. Seals well with the skin.
- Covers the eye and the surrounding areas. Protects the Mucous Membranes of the Eyes. Flexible frame to easily fit all face contours without too much pressure.
- Fog and scratch resistant.
- May be re-usable (provided appropriate arrangements for decontamination are in place) or disposable.

3 Ply Surgical Face Mask

- Triple Layer Surgical mask of non-woven material with elastic band.
- Filter efficiency of 99% for 3 micron particle size.

N95 Face Mask

- Bacterial Filtration Efficiency ≥95% SITRA approved. Conforms to all regulations of all accredited NABL labs.
- Confirmed Minimum Splash Resistance Pressure.
- Particulate Filtration Efficiency ≥95%.
- Conforms to FFP2 as BIS: IS: 9473-2002.
- With / Without Expiratory Valve.





Code	Description	No. / Pack	No. / Case
U50110	PPE KIT- NON STERILE (with 3 ply mask)	1	10
U50111	PPE KIT- STERILE (with 3 ply mask)	1	10
U50112	PPE KIT - NON STERILE (With N95 Mask)	1	10
U50113	PPE KIT - STERILE (With N95 Mask)	1	10
U50114	PPE KIT -NON STERILE (With N95 Mask With Exhalation Valve)	1	10
U50115	PPE KIT -STERILE (With N95 Mask with Exhalation Valve)	1	10



184 | Weighing Boats, PS


- Abdos weighing boats are flexible with smooth surfaces to provide accurate pour-outs with minimal sample loss.
- Biologically inert and resistant to dilute weak acids, aqueous solutions, alcohols, and bases.
- All Abdos weighing boats are anti-static and facilitate the weighing of the static-affected sample.
- These boats can withstand temperature between 10°C to 70°C.
- · Can be used with microwave moisture analysers.
- · Suitable for use with food.
- Standard Weighing Boats are shallow with a wide, flat bottom to resist tipping.
- · They have rounded corners to simplify transfer.
- Pour spout weighing boat have an innovative unique design for easy dispense of the sample without flexing the dish. 12-mil thickness provides good strength, stability and handling.







Weighing Boats Standard, PS				
Size	Colour	LxWxH	No. / Case	
Small	Blue	46 x 46 x 8 mm	250	
Medium	Blue	85 x 85 x 24 mm	250	
Large	Blue	140 x 140 x 22 mm	250	
	Size Small Medium	Size Colour Small Blue Medium Blue	Size Colour L x W x H Small Blue 46 x 46 x 8 mm Medium Blue 85 x 85 x 24 mm	






185 | Spatula, PP

- Abdos Spatula is moulded in polypropylene.
- Spatula consists of a spoon on one side while the other end is a flat construction with a knife edge.
- The edge is helpful in breaking up crystals of different salts while the spoon is used to draw salts from containers.
- Suitable for use with food.





Spatula, PP			
Code	Length	No. / Case	
P70707	150 mm	12	
P70708	200 mm	12	





11 EQUIPMENTS

DIGITAL DRY BATH & THERMO MIX
ROTATING MIXERS & SHAKERS
DIGITAL INCUBATORS
OIL FREE VACUUM PUMPS & MORE

186 | Swirltop – Ultra Flat & Eco Magnetic Stirrer

- SWIRLTOP magnetic stirrer is used in biotech labs, provides better mixing & is ideal for application of physical & chemical analysis.
- Its body is made of ABS material.
- It comes with automatic reverse rotation for better mixing result.
- Top plate is made from chemically resistant materials (PET).



Code	Product	Workplate Size	No. / Case
E11307	Ultra Flat Magnetic Stirrer	9 x 9 cm	1
E11308	Eco Magnetic Stirrer	12 x 12 cm	1

Code	E11307	E11308
Voltage	220-240V	220-240V
Frequency	50-60Hz	50-60Hz
Motor Type	Motor less	Brushless DC Motor
Stirring position	01	01
Speed range	15-1500 rpm	300-2000 rpm
Max. stirring quantity (H ₂ O)	0.8L	1.5L
Maximum magnetic bar (length)	40mm	40mm
Dimensions of work plate	90x90mm	120x120mm
Dimensions	175x120x15 mm	150x145x50 mm
Weight	0.3kg	0.3kg
Speed setting	Button	Scale
Permissible ambient Temperature &	5-40°C	5-40°C
Humidity		
Permissible relative humidity	80%	80%
Protection Class	IP65	IP21





187 | Swirltop - Digital (LED) Magnetic Stirrer & Hot Plate

- Swirl Top unit features an extremely durable, chemical resistant white stainless steel ceramic coated surface that allows immediate heat transfer.
- LED Display shows temperature and speed.
- External Temperature sensor accessory is available with accuracy of ± 0.5°C.
- Extremely accurate digital control system is ideal for applications of analytical and biological laboratory.
- Swirl Top has advanced microprocessor control with convenient turn knobs that allows quick, precise adjustment and maintains accurate temperature and speed.
- Large, backlit LCD display provides constant visualization of speed and temperature while safety LED indicates when the top plate is above 50°C.
- · This digital system is compatible with a wide variety of popular glass beakers, flasks, bottles and vessels.
- · Heat resistant ABS casing.



SWIRLTOP -	SWIRLTOP - LED Digital Magnetic Stirrer & Hot Plate		
Code	Product	Circular Workplate Size	No. / Case
E11231	LED Digital Magnetic Stirrer & Hot Plate with support rod & external temperature probe	13.5 cm	1
E11234	LED Digital Magnetic Stirrer & Hot Plate	13.5 cm	1

Spare Acc	cessories	
Code	Product	No. / Case
E11232	SP - Support Rod	1
E11233	ETP - External Temeperature Probe	1

SPECIFICATIONS.	
Voltage	220-240V
Frequency	50-60Hz
Motor type	DC Motor
Maximum stirring capacity	3L
Work plate dimensions diameter	Diameter 5 Inch
Work plate material	SS Cover Ceramic
Shaking movement	Orbital
Temperature range	Room Temperature - 280°C
Speed range	200 – 1500 rpm
Dimension	150 x 260 x 80 mm
Weight	1.8 kg
Permissible ambient temperature	5 - 40°C
Permissible relative humidity	80%
Protection Class	IP21



188 | Swirltop - Digital (LCD) Magnetic Stirrer & Hot Plate

- · Swirl Top unit features an extremely durable, chemical resistant white ceramic work surface.
- It has advanced microprocessor control with convenient turn knobs that allows quick, precise adjustment and maintains
 accurate temperature and speed.
- Large, backlit LCD display provides constant visualization of speed and temperature while safety LCD indicates when the top plate is above 50°C.
- · This digital system is compatible with a wide variety of popular glass beakers, flasks, bottles and vessels.
- Optional probe is available to derive precise temperature control. When connected, the probe provides direct feedback to the microprocessor that continuously adjusts and maintains the selected temperature in the sample within an accuracy of ±0.5°C.



SWIRLTOP - LCD Digital Magnetic Stirrer & Hot Plate			
Code	Product	Workplate Size	No. / Case
E11227	Digital Magnetic Stirrer & Hot Plate	16.5 x 16.5 cm	1

Spare Ac	Spare Accessories		
Code	Product	No. / Case	
E11228	Support Rod	1	
E11229	External Temeperature Probe	1	

Voltage	220-240V
Frequency	50-60 Hz
Shaking movement	Orbital
Maximum stirring capacity	5 L
Temperature range	5 - 380°C
Speed Range	200-1500rpm
Dimension	177 x 265 x 100mm
Weight	1.8kg
Permissible ambient temperature	5 - 40°C
Permissible relative humidity	80%



189 | Swirltop - 7 inch LCD Digital Magnetic Stirrer & Hot Plate

- LCD display for precise monitoring of speed and temperature for Magnetic stirrer & Hot plate.
- Built in PID Controller ensures the safe heating of the medium with overheating and protection.
- Max heating plate temperature 550°C.
- · Glass ceramic work plate provides excellent chemical resistant performance and efficient heat transfer.
- External temperature control is possible by connecting the temperature sensor (PT 1000) with an accuracy at ±0.2°C.
- · Digital speed control.
- · Maximum Speed at 1500rpm.
- Outstanding brushless DC motor performance enables more stirring power.
- Two rotating knobs enable the easy and direct change of speed and temperature.
- HOT WARNING will flash when the work plate temperature is above 50°C or even the hot plate is turned off.
- Remote Function provides PC Control and data transmission via RS232 using 3rd Party Software.



SWIRLTOP	SWIRLTOP - LED Digital Magnetic Stirrer & Hot Plate			
Code	Code Product		No. / Case	
E11650	LCD DIGITAL Magnetic Stirrer & Hotplate with support Rod & External Temperature Probe	18.4 x 18.4 cm	1	
E11651	LCD DIGITAL Hotplate with support Rod & External Temperature Probe	18.4 x 18.4 cm	1	
E11652	LCD DIGITAL Magnetic Stirrer & Hotplate	18.4 x 18.4 cm	1	
E11653	LCD DIGITAL Hotplate	18.4 x 18.4 cm	1	

Spare Accessories		
Code	Product	No. / Case
E11654	SS/Support Rod-Seven Inch	1
E11233	ETP - External Temeperature Probe	1

Code	E11650 & E11652	E11651 & E11653
Voltage	220-240V	220-240V
Frequency	50-60 Hz	50-60 Hz
Motor Type	Brushless DC Motor	Brushless DC Motor
Maximum stirring capacity	20 L	NA
Work plate dimensions diameter	184 x 184mm (7Inch)	184 x 184mm (7Inch)
Work plate material	Glass Ceramic	Glass Ceramic
Temperature range	Room Temperature – 550°C,	Room Temperature – 550°C,
	Increment 1°C	Increment I°C
Overheating protection	580°C	580°C
Temperature control accuracy	±0.1°C	±0.1°C
Speed display	LCD	NA
Temperature display	LCD	LCD
Speed range	100 – 1500 rpm, resolution± 1rpm	NA
Maximum magnetic bar (length)	80mm	NA
Dimension	215x360x112mm	215x360x112mm
Weight	5.3kg	5.3kg
Permissible ambient temperature &	5 - 40°C	5 - 40°C
Humidity		
Permissible relative humidity	80%	80%
Protection class	IP21	IP21
		25370von
		ABOS
	7	

190 | Swirltop - Multi Channel Magnetic Stirrer & Hot Plate

- SWIRLTOP Unit features an extremely durable stainless steel plate with anti-slip and anti-corrosion silicon surface.
- SWIRLTOP advanced Microprocessor based electronic speed control motor provides constant speed.
- High performance multi-position magnetic stirrer with uniform temperature distribution.
- Micro-processor based stirring controls to provide consistency with various samples.
- Brushless DC Motor for maintenance free & quiet operations.



Code	Product	Workplate Size	No. / Case
E11235	10 Channel Magnetic Stirrer	18 x 45 cm	1
E11236	10 Channel Magnetic Stirrer & Hot Plate	18 x 45 cm	1

SPECIFICATIONS:		
Code	E11235	E11236
Voltage	220-240V	220-240V
Frequency	50-60 Hz	50-60 Hz
Dimension of work plate	180 x 450 mm	180 x 450 mm
Speed display	Scale	Scale
Shaking Movement	Orbital	Orbital
Temperature range	NA	Room Temperature – 120°C
Motor Type	DC Motor	DC Motor
Stirring Speed	0 – 1100 rpm	0 – 1100 rpm
Stirring Position	10	10
Maximum Stirring capacity	0.4 L(Each stirring position)	0.4 L(Each stirring position)
Max. Stirring Bar	40 mm	40 mm
Plate Material	Stainless Steel with silicon	Stainless Steel with silicon
Dimension	Film	Film
Weight	182 x 622 x 65mm	182 x 622 x 65mm
Permissible ambient temperature &	5.3 kg	5.3kg
Humidity	5 – 40°C	5 - 40°C
Permissible relative humidity	80%	80%
Protection class	IP42	IP42



191 | Swirlmax - Tube Roller

- Swirlmax is a classic tube roller that can be used for rocking and rolling for complete mixing.
- It has a wide speed range of 0-70rpm.
- It has a total of six rollers with small footprints and it is very easy to clean.
- Swirlmax has a quiet DC brushless motor which is reliable, sound free and maintenance free.
- Swirlmax can be used in cold rooms or in incubators.



Code	Product	No. / Case
E11230	Tube Roller	1

220-240V
50Hz
25W
DC Motor
Rocking and Rolling
24mm
4kg
6
280mm
0-70rpm
Scale
Continuous operation
450 X 260 X 120 mm
4.5 kg
5-40°C
80%
IP21



192 | HOTBLOCK - LED Digital Dry Bath

- ABDOS-LED Digital Dry Bath Heaters are available in single and dual block configurations and provide a broad temperature range up to 150°C, which makes them useful for a variety of applications in molecular biology, histology, clinical, environmental, and industrial laboratories.
- They have been designed to incorporate the best combination of features including block capacity, dual displays, and an external temperature probe that gives life science researchers the confidence and efficiency they need when working with precious lab samples.
- This is ideal for including melting and boiling point determination, enzyme reactions, incubation and activation of cultures, immunoassays, DNA denaturation, culture and media tests, coagulation, tests, blood urea nitrogen determinations and in-situ hybridizations.
- The blocks are precision machined to match the conical size and shape of 0.5, 1.5, 2.0, 15 and 50ml tube sizes, providing unsurpassed temperature transfer. Assorted blocks are available for compatibility with nearly all common laboratory tubes and plates.
- Various optional blocks are available for best performance.
- Protection class according to DIN EN 60529.



HOTBLOCK - LED Digital Dry Bath				
Code	Product	Block Capacity	Temperature Range	No. / Case
E11330	LED Digital Dry Bath with one Heating Block	Single	Ambient +5°C −120°C	1
E11360	LED Digital Dry Bath with one heating Block	Single	Ambient +5°C -105°C	1
E11370	LED Digital Dry Bath with two Heating Block	Dual	Ambient +5°C -105°C	1
E11380	LED Digital Dry Bath with one heating Block	Single	Ambient +5°C -150°C	1
E11390	LED Digital Dry Bath with two Heating Block	Dual	Ambient +5°C -150°C	1

Spare A	Spare Accessories of E11330			
Code	de Product Places		No. / Case	
E11331	Heating Block, used for 0.2 ml	54	1	
E11332	Heating Block, used for 0.5 ml	40	1	
E11333	Heating Block, used for 1.5 ml	40	1	
E11338	Heating Block, used for 2.0 ml	40	1	
E11334	Heating Block, used for 5/15 ml	28	1	
E11335	Heating Block, used for 50 ml	8	1	
E11336	Heating Block, used for 0.2, 0.5, 1.5/2.0 ml	18	1	
E11337	Heating Block, used for 96/384 Microplate	96 /384 Microplate	1	
E11339	Heating Block, used for 2.0 ml (Thin)	40	1	
E11368	Heating Block, used for 1.5 ml (Thin)	40	1	



E11331





E11335



E11336

E11333

Spare Accessories of E11360, E11370, E11380, E11390					
Code	Product	Places	No. / Case		
E11361	Heating Block, used for 0.2 ml	30	1		
E11362	Heating Block, used for 0.5 ml	20	1		
E11363	Heating Block, used for 1.5 ml	20	1		
E11364	Heating Block, used for 2 ml	20	1		
E11365	Heating Block, used for 5 ml	12	1		
E11366	Heating Block, used for 15 ml	12	1		
E11367	Heating Block, used for 50 ml	4	1		





E11364





E11365

E11367

SPECIFICATIONS:	E11330	E11360	E11370	E11380	E11390
Voltage	220-240V	220-240V	220-240V	220-240V	220-240V
Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Adaptor block material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Maximum heating rate	5.5°C/min	5.5°C/min	5.5°C/min	5.5°C/min	5.5°C/min
Heating temperature Range	Room Tempearture +5-120°C	Room Tempearture +5-105°C	Room Tempearture +5-105°C	Room Tempearture +5-150°C	Room Tempearture +5-150°C
Temperature Setting Range	25-120	25-105	25-105	25-150	25-150
Temperature Control accuracy	±0.5°C	25-90:±0.3 90-105:±0.6	25-90:±0.3 90-105:±0.6	25-90: ±0.3 90-150: ±0.6	25-90:±0.3 90-150:±0.6
Temperature Uniformity @ 37°C	±0.5	±0.2	±0.2	±0.2	±0.2
Sound Alarming Function	-	Yes	Yes	Yes	Yes
Timer	Yes	Yes	Yes	Yes	Yes
Time setting range	1 Min - 99Hr 59Min	0 Min - 99Hr 59Min			
Operation type	Continuous/timed operation				
External Sensor	-	Yes	Yes	Yes	Yes
USB Interface	-	Yes	Yes	Yes	Yes
Dimension (W x D x H)	175 x 220 x 85mm	290 x 210 x 120mm			
Permissible ambient temperature	5-40°C	5-40°C	5-40°C	5-40°C	5-40°C
Permissible humidity	80%	80%	80%	80%	80%
Protection Class	IP21	IP21	IP21	IP21	IP21



E11330



E11360 & E11380



E11370 & E11390

193 | THERMO MIX- LCD Digital

- ABDOS Thermo Mix Series allows for precise and efficient shaking and mixing as well as excellent temperature
 accuracy and uniformity, offering a wide range of applications, such as Gene Synthesis, Gene Purification, Gene
 Denaturation, Protein Denaturation, Enzymatic reaction, Bacterial growth and many more.
- ABDOS Thermo Mix is equipped with quick interchange of blocks with magnet Adhesion technology and without any tools.
- It is programmable and has three points calibration with precise temperature control for heating and cooling.



Thermo Mi	x - LCD Digital	
Code	Product	No. / Case
E11340	LCD Digital Thermo Mix with Heating and Cooling and Mixing with 1.5 ml Heating Block	1
E11341	LCD Digital Thermo Mix with Heating and Cooling with 1.5 ml Heating Block	1
E11342	LCD Digital Thermo Mix with Heating and Mixing with 1.5 ml Heating Block	1

Spare Accessories				
Code	Product	Speed	Places	No. / Case
E11343	Heating Block, used for 0.2 ml / 96 well PCR plate	1500rpm	96	1
E11344	Heating Block, used for 96/384 well microplate	1500rpm	96/384	1
E11345	Heating Block, used for 0.5 ml	1500rpm	24	1
E11346	Heating Block, used for 1.5 ml	1500rpm	24	1
E11347	Heating Block, used for 2.0 ml	1500rpm	24	1
E11348	Heating Block, used for 5 ml (Round Bottom)	1500rpm	8	1
E11358	Heating Block, used for 5ml (Conical Bottom)	1400rpm	8	1
E11349	Heating Block, used for 15 ml	800rpm	8	1
E11350	Heating Block, used for 50 ml	600rpm	4	1

Code	E11340	E11341	E11342
Voltage	220-240 V	220-240 V	220-240 V
Frequency	50-60 Hz	50-60 hz	50-60 hz
Functions	Heating, cooling & Mixing	Heating & Cooling	Heating & Mixing
Adaptor Block Material	Aluminium	Aluminium	Aluminium
Temperature Range	Heating: 25°C-100°C	Heating: 25°C-110°C	Heating: 25°C-100°C
	Cooling: 25°C - below 15°C	Cooling: 25°C - below 25°C	
Setting Temperature Range	0.1~100°C	-5~100°C	15~100°C
Temperature Uniformity @ 20-45°C	±0.5°C	±0.5°C	±0.5°C
Temperature control accuracy@ 20-45°C	±0.5°C	±0.5°C	±0.5°C
Maximum Heating Rate	5.5°C/min	5.5°C/min	5.5°C/min
Maximum Cooling Rate	5.5°C/min(100°C-25°C)	2.5°C/Min(100°C-25°C)	-
	0.5°C/min(below 25°C)	0.5°C/Min(below 25°C)	-
Mixing Frequency	200-1500 rpm	NA	200-1500 rpm
Mixing Orbit	3 mm	NA	3 mm
Program	9	9	9
Overheating Protection	150°C	150°C	150°C
Dimension(WXDXH)	200 x 235 x 120mm	200 x 235 x 120mm	200 x 235 x 120mm
Weight	7.3 kg	7.3 kg	7.3 kg





194 | Swirlex - LCD Digital Overhead Stirrer

- Swirlex overhead stirrer is widely used in chemical synthesis, pharmaceutical synthesis, physical and chemical analysis, petrochemical industry and more.
- Reliability, long continuous service and outstanding performance are its hallmarks.
- Digital LCD display for precise monitoring of set and actual speed.
- LCD Torque displays real time information on viscosity changes.
- · Protection and safety circuits ensure automatic cut-off in an anti-stall or overload conditions.
- Provides a constant speed even with changes in viscosities of sample.
- RS232 interface PC can control and document all operation values.



Swirlex -	Swirlex - Digital Overhead Stirrer				
Code	Product	Maximum Stirring Quantity	No. / Case		
E11310	LED Digital Overhead Stirrer with Universal Plate Stand including support holder and fixing device and (E11312) Stainless Steel crossed Stirrer(E11313)	20L	1		
E11311	LED Digital Overhead Stirrer with Universal Plate Stand including support holder and fixing device and (E11312) Stainless Steel crossed Stirrer(E11313)	40L	1		
E11321	LCD Digital Overhead Stirrer with Timer with Universal Plate Stand including support holder and fixing device and (E11312) Stainless Steel grand crossed Stirrer(E11324)	70L	1		
E11322	LCD Digital Overhead Stirrer with Timer with Grand Plate Stand including support holder and fixing device and (E11323) Stainless Steel grand crossed Stirrer(E11324)	70L	1		

Spare Accessories for E11310, E11311, E11321 & E11322				
	Code	Product	Dimensions	No. / Case
	E11312	Universal Plate Stand including support holder & fixing device	20 x 31 cm (L x W)	1
	E11313	Stainless Steel Crossed Stirrer	40 x 5 cm (L x Φ)	1
	E11314	Stainless Steel Straight Stirrer	40 x 6 cm (L x Φ)	1
	E11315	Stainless Steel Blade Stirrer	40 x 6.8 cm (L x Φ)	1
	E11316	Stainless Steel Centrifugal Stirrer	40 x 9 cm (L x Φ)	1
	E11317	PTFE Crossed Stirrer	35 x 6.5 cm (L x Ф)	1
	E11318	PTFE Straight Stirrer	35 x 7 cm (L x Φ)	1
	E11319	PTFE Blade Stirrer	35 x 6.8 cm (L x Ф)	1
	E11320	PTFE Centrifugal Stirrer	35 x 8.5 cm (L x Ф)	1

Spare Accessories for E11321 & E11322				
	Code	Product	Dimension	No. / Case
	E11323	Universal Grand Plate Stand including support holder & fixing device	33.5 x 46.3 cm (L x W)	1
	E11324	Stainless Steel Grand Crossed Stirrer	60 x 10 cm (L x Φ)	1
	E11325	Stainless Steel Grand blade Stirrer	60 x 10 cm (L x Φ)	1
	E11326	Stainless Steel grand anchor Stirrer	60 x 10 cm (L x Φ)	1
	E11327	Stainless Steel grand Centrifugal Stirrer	60 x 10 cm (L x Φ)	1





Code	E11310	E11311	E11321 & E11322
Voltage	220-240V	220-240V	220-240V
Frequency	50-60Hz	50-60Hz	50-60Hz
Power	70W	130W	200W
Speed Range	50 – 2200rpm	50 – 2200rpm	50 – 1100rpm
Speed Display	LED	LED	LCD
Max. Stirring Quantity	20L	40L	70L
Max Torque	40Ncm	60Ncm	300Ncm
Max Viscosity	10000mPas	50000mPas	100000mPas
Chuck range diameter	0.5 – 10mm	0.5 – 10mm	0.5 – 10mm
Overload Protection Display	LED Lights, Motor Automatically	LED Lights, Motor Automatically	LED Lights, Motor Automatically
	Stops	Stops	Stops
Dimensions	83 x 220 x 186 mm	83 x 220 x 186 mm	83 x 220 x 186 mm
Weight	2.8 kg	2.8 kg	3.2 kg
Data Interface RS232	No	No	Yes
Permissible ambient Temperature	5-40°C	5-40°C	5-40°C
Permissible ambient Humidity	80%	80%	80%
Protection class according to DIN/	IP21	IP21	IP21
EN 60529			



195 | Swirlex - Vortex Shaker

- Swirlex-Vortex is suitable for touch or continuous or fixed operation.
- Used for gentle mixing to vigorous re-suspension of biological cells and canonical liquid components in tubes using eccentric mechanism.
- These vortex shakers contain specially designed silicone feet and steel base excellent for damping vibration.
- Swirlex vortex Shaker is eccentric with oil less ball bearing.
- A wide range of accessories are also available.



SWIRLEX	SWIRLEX - Vortex Shaker			
Code	Product	Work Plate Diameter	No. / Case	
E11190	Swirlex Adjustable Vortex Shaker	4 mm	1	

Spare A	Spare Accessories		
Code	Product	No. / Case	
E11191	Tube holding Rod	1	
E11192	Universal 100mm top plate with 4 vaccum suction feet	1	
E11198	Platform pad for tubes and vessels $\acute{\phi}$ 99 mm	1	
E11197	Tube Adapter for 48 holes test tube \acute{o} 6mm	1	
E11193	Tube Adapter for 15 holes test tube \acute{o} 10mm	1	
E11194	Tube Adapter for 16 holes test tube \acute{o} 12mm	1	
E11195	Tube Adapter for 8 holes test tube \acute{o} 16mm	1	
E11196	Tube Adapter for 8 holes test tube \acute{o} 20mm	1	

 $\textit{Kindly Note: E11192} \ \ \textit{is required to run E11198, E11197, E11193, E11194, E11195, E11196 \& E11196 Adapter. \\$

of Low To Articles.				
Voltage	220-240V			
Frequency	50-60Hz			
Speed Range	0 – 2500 rpm			
Shaking Movement	Orbital			
Motor Type	Shaded Pole Motor			
Outer Diameter	4mm			
Speed Display	Analog Type			
Run Type	Continuous/Touch operation			
Dimensions	127x130x160 mm			
Weight	3.5 kg			
Power	60W			
Permissible ambient temperature	5-40°C			
Permissible relative humidity	80%			
Protection Class	IP21			



196 | Swirlex - Microplate Mixer

- SWIRLEX-Micro plate Mixer is used for holding single or double micro plates with an SBS footprint.
- This is widely used in life sciences including microbiology, cell and molecular biology, immunology and biotechnology for various mixing applications with optional adapters.
- The high speed and small diameter combine to offer a true vortexing action in each well of the micro plate. This action ensures both complete and uniform mixing.



SWIRLEX - I	SWIRLEX - Microplate Mixer		
Code	Product	No. / Case	
E11200	Swirlex Microplate Mixer Including Microplate Clamp(E11201) as standard	1	
	Spare Accessories		
Spare Acce	ssories		
Spare Acce	ssories Product	No. / Case	
		No. / Case	



Voltage	220-240V
Frequency	50-60Hz
Shaking Movement	Orbital
Speed Range	Single Microplate : 0-1500 rpm
	Double Microplate : 0-1000 rpm
Orbit Diameter	4.5 mm
Maximum Shaking Weight (With accessory)	0.5 Kg
Motor Type	Brushless DC Motor
Dimensions	260x150x80mm
Permissible ambient temperature	5-40°C
Permissible relative humidity	80%
Protection Class	IP21





197 | Wavex - Classic Tube Rotator

- Wavex tube rotators provide gentle but effective mixing of biological samples, held in 1.5 ml to 50 ml tubes.
- Used in a variety of applications including immune precipitations, prevention of blood coagulation & latex diagnostics.
- Wavex-Classic Tube Rotator has Disk Type Design.



SWIRLEX	SWIRLEX - Classic Tube Rotator		
Code	Product	No. / Case	
E11300	Wavex-Classic Tube Rotator	1	

Spare A	Spare Accessories		
Code	Product	No. / Case	
E11301	Plastic Clips for 1.5 ml x 12 micro centrifuge tubes,Disk accessory	12	
E11302	Plastic Clips for 15 ml x 12 micro centrifuge tubes, Disk accessory	12	
E11303	Plastic Clips for 50 ml x 12 micro centrifuge tubes,Disk accessory	12	

of Edit Ida Hotto:	
Voltage	220-240V
Frequency	50-60Hz
Power	20W
Motor Type	DC Motor
Tilt Angle	90°
Speed Range	0-80rpm
Speed Display	Scale
Operation Type	Continuous
Dimensions	300 x 220 x 310mm
Weight	2 kg
Permissible ambient Temperature	5-40°C
Permissible ambient Humidity	80%
Protection Class	IP21



198 | Wavex - LCD Tube Rotator

- Wavex tube rotators provide gentle but effective mixing of biological samples, held in 1.5 ml to 50 ml tubes.
- Used in a variety of applications including immune precipitations, prevention of blood coagulation & latex diagnostics.
- Wavex tube rotator has a disk type design.
- LCD displays and digital speed control allows procedures to be accurate.
- Speed range of 10 to 70 rpm.
- Wavex tube rotator has an adjustable mixing angle between 0 90°.
- Wavex tube rotator has dual dish accessories for larger tubes.



SWIRLEX - Microplate Mixer		
Code	Product	No. / Case
E11270	Wavex-LCD Digital Tube Rotator with Disk accessory for 50ml x 8 Centrifuge Tubes	1

Spare Accessories		
Code	Product	No. / Case
E11271	Disk accessory for 1.5 ml x 60 micro centrifuge tubes	1
E11272	Disk accessory for 50 ml x 8 centrifuge tubes	1
E11273	Disk accessory for 15 ml x 16 centrifuge tubes	1
E11274	Disk support rods used with disk accessories	4


SPECIFICATIONS:

Voltage	220-240V
Frequency	50Hz
Power	40 W
Motor Type	DC Motor
Tilt Angle	0 - 90°
Speed Range	0-70 rpm
Speed & Timer Display	LCD
Time Setting Range	1 - 1199 min.
Operation Type	Continuous / timed operation
Dimensions	510 x 190 x 260 mm
Weight	8 kg
Permissible ambient Temperature	5-40°C
Permissible ambient Humidity	80%
Protection Class	IP 21











E11271 E11272 E11273 E11274

199 | Wavex - Classic Rotating Mixer

- Wavex tube rotators provide gentle but effective mixing of biological samples, held in 1.5 ml to 50 ml tubes.
- Used in a variety of applications including immune precipitations, prevention of blood coagulation and latex diagnostics.
- Wavex-Classic Tube Rotator has Disk Type Design.



SWIRLEX - Vortex Shaker		
Code	Product	No. / Case
E11305	Wavex-Classic Rotating Mixer	1

Spare Accessories		
Code	Product	No. / Case
E11301	Plastic Clips for 1.5 ml x 12 micro centrifuge tubes,Disk accessory	12
E11302	Plastic Clips for 15 ml x 12 micro centrifuge tubes, Disk accessory	12
E11303	Plastic Clips for 50 ml x 12 micro centrifuge tubes, Disk accessory	12

Voltage	220-240V	
Frequency	50-60Hz	
Power	20W	
Motor Type	DC Motor	
Tilt Angle	90°	
Speed Range	0-80rpm	
Speed Display	Scale	
Operation Type	Continuous	
Dimensions	150 x 530 x 190mm	
Weight	1.7 kg	
Permissible ambient Temperature	5-40°C	
Permissible ambient Humidity	80%	
Protection Class	IP21	



200 | Wavex-LCD Rotating Mixer

- Wavex –LCD Rotating Mixer give gentle but effective mixing of biological samples to be held in 1.5 ml to 50 ml tubes used in a variety of applications including immune precipitations, prevention of blood coagulation and latex diagnostics.
- Wavex rotating mixer has a rotisserie type design.
- LCD displays and digital speed control allows procedures to be accurate.




Wavemax	Wavemax - LCD Rotating Mixer		
Code	Product	No. / Case	
E11280	LCD Digital Rotating Mixer with Rotisserie accessory for 50 ml x 24 centrifuge tubes horizontally	1	

Spare Accessories		
Code	Product	No. / Case
E11281	Rotisserie accessory for 1.5 ml x 48 micro centrifuge tubes horizontally	1
E11282	Rotisserie accessory for 50 ml x 24 centrifuge tubes horizontally	1
E11283	Rotisserie accessory for 15 ml x 24 centrifuge tubes horizontally	1
E11284	Rotisserie accessory for 1.5 ml x 32 micro centrifuge tubes vertically	1
E11285	Rotisserie accessory for 50 ml x 16 centrifuge tubes vertically	1
E11286	Rotisserie accessory for 15 ml x 16 centrifuge tubes vertically	1
E11274	Disk support rods with disk accessories	4

220-240V
50Hz
40 W
DC Motor
0 - 90°
0-70 rpm
LCD
1 - 1199 min.
Continuous / timed oper-
ation
510 x 190 x 260 mm
8 kg
5-40°C
80%
IP 21



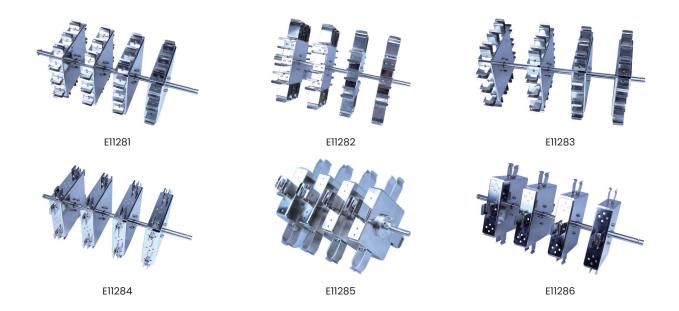

201 | Wavemax - Digital Rocking Shaker

- Abdos Digital rocking shakers are used for staining and destaining gels, hybridization procedures, haematology
 and blotting techniques. Designed to provide precise speed and tilt angles required for broad range of molecular
 and biological mixing applications.
- It boasts of digital speed control and large LED display, speed and timer can be viewed simultaneously.
- Aluminium-alloyed platform provides strong bearing capability, with non-slip mat that holds vessels and prevents it from slipping.
- · Specially designed and developed compact space-saving design fits easily in the incubator.
- Space Accessories have a wide range of platforms for use with a variety of vessels.



WAVEMAX - LED Digital Rocking Shaker		
Code	Product	No. / Case
E11410	Wavemax – Digital Rocking Shaker with platform with Dish Attachment with non-Slip Mat	1

Spare Accessories for Digital Rocking Shaker (E11410)		
Code	Product	No. / Case
E11451	Universal attachment with 3 Bars	1
E11452	Dish attachment with non-slip mat	1
E11453	Fixing clip attachment	1
E11415	Fixing clip for 25 ml flask	1
E11416	Fixing clip for 50 ml flask	1
E11417	Fixing clip for 100 ml flask	1
E11418	Fixing clip for 200/250 ml flask	1
E11419	Fixing clip for 500 ml flask	1



^{*} Pls note E11453 is required to run E11415, E11416, E11417, E11418 & E11419.

Voltage	220-240V	
Frequency	50-60Hz	
Power	50W	
Motor type	DC Motor	
Rocking motion	See-saw rocking	
Maximum load capacity (With	3.0 kg	
Platform)		
Tilt angle	7°	
Speed range	10-70rpm	
Speed & timer display	LED	
Time range	1 min – 19 h 59 min	
Operation Type	Continuous /timed operation	
Dimensions	270 x 330 x 130mm	
Weight	3.2 Kg	
Permissible ambient temperature	5-40°C	
Permissible ambient Humidity	80%	
Protection class	IP21	



Universal attachment with bars



Dish attachment with non-slip mat

202 | Wavemax - Digital (3D) Dancing Shaker

- Wavemax classic dancing shakers are used for staining and destaining gels, hybridization procedures, haematology and blotting techniques.
- This 3 dimensional shaker is designed to provide precise speed and tilt angles required for broad range of molecular and biological mixing applications.
- Abdos LED dancing shaker boasts of digital speed control and large LED display, speed and timer can be viewed simultaneously.
- Aluminium-alloyed platform provides strong bearing capability, with non-slip mat that holds vessels and prevents it from slipping.
- · Specially designed and developed compact space-saving design fits easily in the incubator.
- Space accessories have a wide range of platforms for use with a variety of vessels.



WAVEMAX - LED Digital Dancing (3D) Shaker		
Code	Product	No. / Case
E11430	Wavemax – Digital Dancing Shaker with platform with Dish Attachment with non-Slip Mat	1

Spare Accessories for Digital (3D) Dancing Shaker (E11430)		
Code	Product	No. / Case
E11451	Universal attachment with 3 Bars	1
E11452	Dish attachment with non-slip mat	1
E11453	Fixing clip attachment	1
E11415	Fixing clip for 25 ml flask	1
E11416	Fixing clip for 50 ml flask	1
E11417	Fixing clip for 100 ml flask	1
E11418	Fixing clip for 200/250 ml flask	1
E11419	Fixing clip for 500 ml flask	1

^{*}Please note E11453 is required to run E11415, E11416, E11417, E11418 & E11419.



Voltage	220-240V
Frequency	50-60Hz
Power	40W
Motor type	DC Motor
Rocking motion	3 Dimensional
Maximum load capacity (With Platform)	3.0 kg
Tilt angle	7°
Speed range	10-80 rpm
Speed & timer display	LED
Time range	1 min - 19h59min
Operation Type	Continuous /timed operation
Dimensions	270 x 330 x 130mm
Weight	2.7Kg
Permissible ambient temperature	5-40°C
Permissible ambient Humidity	80%
Protection class	IP21



Universal attachment with bars



Dish attachment with non-slip mat

203 | Wavemax – Orbital Shaker Junior

- Abdos orbital shaker has digital speed control of upto 300 rpm.
- These shakers have horizontal circular 19 mm orbit for aeration and mixing.
- Universal magnetic clamp can be instantly exchanged.
- These shakers have a capacity of up to 20 x 50ml, 12 x 125 ml, 8 x 250 ml, 5 x 500 ml, 4 x 1L flasks.



WAVEM	WAVEMAX - Orbital ShakerJunior			
Code	Product	Platform Dimension	No. / Case	
E11260	Wavemax – Orbital Shaker Junior with flat mat	9.5" x 8"	1	
Spare A	Spare Accessories			
spure A	ccessories			
Code	Product	Platform Dimension	No. / Case	
•		Platform Dimension	No. / Co	

Kindly Note: Flask clamps and Fixed Platforms are sold separately. See page No. 159 for complete listing

SPECIFICATIONS:

Voltage	220-240 V
Frequency	50 Hz
Shaking Movement	Orbital
Timer	1min-99hrs59min
Speed Range	50 – 300 rpm, Variable
Speed Increment	10 rpm
Orbit	19 mm
Load Capacity	Maximum 4 kg
Dimension	280 x 270 x 130 mm
Weight	5.5 kg
Permissible ambient temperature	+4 to +65° C
Permissible relative humidity	80%



204 | Wavemax - Orbital Shaker

- Abdos powerful orbital shaker is capable of mixing liquids upto a load capacity of 6 kg in bottles, flasks, test tubes & dishes.
- · Abdos orbital shaker has digital speed control of upto 300 rpm.
- These shakers have high capacity of upto 24 x 125 ml, 14 x 250 ml, 9 x 500 ml, 5 x 11 and 2 x 21 flasks and bottles.
- These shakers have horizontal circular 19 mm orbit for aeration and mixing.
- Universal magnetic clamp can be instantly exchanged.



WAVEMAX - Orbital ShakerJunior			
Code	Product	Platform Dimension	No. / Case
E11290	Wavemax – Orbital Shaker with flat mat	13"x 12"	1

Spare Accessories			
Code	Product	Platform Dimension	No. / Case
E11291	Universal Magnetic platform for flasks and tube racks	14"x 12"	1

Kindly Note: Flask clamps and Fixed Platforms are sold separately. See page No. 159 for complete listing SPECIFICATIONS:

Voltage	220-240V
Frequency	50 Hz
Shaking Movement	Orbital
Speed Range	30 – 300 rpm, Variable
Speed Increment	1 rpm
Orbit	19 mm
Load Capacity	Maximum 6 kg
Dimension	280 x 330 x 75 mm
Weight	11.25 kg
Permissible ambient temperature	+4 to +65° C
Permissible relative humidity	80%



205 | Wavemax - LED Digital Orbital & Linear Shaker

- Abdos orbital and linear shakers are capable of mixing and shaking liquids in bottles, flasks, vessels, test tubes & dishes.
- · Independent LED display for adjusting speed and time. Speed and timer can be viewed simultaneously.
- Maximum load capacity of 3.0 kg with platform.
- Specially designed and developed compact space-saving design fits easily in the incubator and refrigerator.
- Electronic time switching clock controls time or continuous operation mode.
- Space Accessories have a wide range of platforms for use with a variety of vessels.
- Over speed detection and protection.



WAVEMAX	- Digital Orbital Shaker	
Code	Product	No. / Case
E11460	Wavemax – LED Digital Orbital Shaker with dish attachment with non-slip mat.	1
WAVEMAX	- Digital Linear Shaker	
Code	Product	No. / Case
E11470	Wavemax – LED Digital Linear Shaker with dish attachment with non-slip mat.	1
Spare Acc	essories for E11460 & E11470	
Code	Product	No. / Case
E11451	Universal attachment with 3 Bars	1
E11452	Dish attachment with non-slip mat	1
E11453	Fixing clip attachment	1
E11415	Fixing clip for 25 ml flask	1
E11416	Fixing clip for 50 ml flask	1
E11417	Fixing clip for 100 ml flask	1
E11418	Fixing clip for 200/250 ml flask	1

^{*} Pls note E11453 is required to run E11415, E11416, E11417, E11418 & E11419.

SPECIFICATIONS:	E11460	E11470
Voltage	220-240V	220-240V
Frequency	50-60Hz	50-60Hz
Power	20W	20W
Motor Type	Brushless DC Motor	Brushless DC Motor
Shaking Motion	Orbital	Linear
Orbital Diameter	20mm	20mm
Maximum load capacity (With Platform)	3.0 kg	3.0 kg
Speed Range	40-200rpm	40-200rpm
Speed & Timer Display	LED	LED
Time Range	1 min – 19h59min	1 min – 19h59min
Operation Type	Continuous /timed operation	Continuous/timed operation
Dimensions	270x330x110mm	270x330x110mm
Weight	3.1 Kg	3.1 Kg
Permissible ambient Temperature	5-40°C	5-40°C
Permissible ambient Humidity	80%	80%
Protection Class	IP21	IP21







Universal attachment with bars



Dish attachment with non-slip mat



Fixing clamp attachment

206 | Wavemax - Heavy Duty LCD Digital Orbital & Linear Shaker

- Abdos orbital and linear shakers are capable of mixing and shaking liquids in bottles, flasks, vessels, test tubes & dishes.
- Independent LCD display for adjusting speed and time, speed and timer can be viewed simultaneously.
- Maximum load capacity of 7.5 kg with platform.
- Specially designed and developed compact space-saving design fits easily in the incubator and refrigerator.
- Electronic time switching clock controls time or continuous operation mode.
- Space Accessories have a wide range of platforms for use with a variety of vessels.
- Over speed detection and protection.



WAVEMAX - Heavy Duty LCD Digital Orbital Shaker			
Code	Product	No. / Case	
E11480	Wavemax – Heavy Duty Orbital Shaker with universal Attachment with 4 Bar	1	
WAVEMAX	C – Heavy Duty LCD Digital Linear Shaker		
Code	Product	No. / Case	
E11490	Wavemax – Heavy Duty Linear Shaker with universal Attachment with 4 Bar	1	
Spare Acc	cessories for E11480 & E11490		
Code	Product	No. / Case	
E11411	Universal attachment with 4 Bars	1	
E11413	Dish attachment with non-slip mat & fixed string	1	
E11414	Fixing clip attachment	1	
E11415	Fixing clip for 25 ml flask	1	
E11416	Fixing clip for 50 ml flask	1	
E11417	Fixing clip for 100 ml flask	1	
E11418	Fixing clip for 200/250 ml flask	1	
E11419	Fixing clip for 500 ml flask	1	

^{*} Pls note E11414 is required to run E11415, E11416, E11417, E11418 & E11419.

SPECIFICATIONS:	E11480	E11490
Voltage	220-240V	220-240V
Frequency	50-60Hz	50-60Hz
Power	30W	30W
Motor Type	Brushless DC Motor	Brushless DC Motor
Shaking Motion	Orbital	Linear
Orbital Diameter	10 mm	10 mm
Maximum load capacity (With Platform)	7.5kg	7.5kg
Speed Range	100-500 rpm	100-350 rpm
Speed & Timer Display	LCD	LCD
Time Range	1 min – 19 h 59 min	1 min – 19 h 59 min
Operation Type	Continuous /timed operation	Continuous /timed operation
Data Connector	RS232	RS232
Dimensions	370 x 420 x 100 mm	370 x 420 x 100 mm
Weight	13.5 Kg	13.5 Kg
Permissible ambient Temperature	5-40°C	5-40°C
Permissible ambient Humidity	80%	80%
Protection Class	IP21	IP21







Fixing Clamps



Universal attachment with bars



Dish attachment with non-slip mat

207 | Wavemax-Digital Incubator


- Wavemax-Digital Incubators provide the facility to monitor the chamber temperatures in real time.
- Has large internal chambers with two adjustable shelves for increased space. Internal Power Outlet for Installation of other Equipment for sample agitation within the Digital Incubators.
- Wavemax-Digital Incubator is available in a heating unit or heating and cooling for lower temperature applications.



Wavemax - Digital Incubator		
Code	Product	No. / Case
E11355	Heating Digital Incubator	1
E11356	Heating & Cooling Digital Incubator	1

Spare Accessories			
Code	Product	Platform Dimension	No. / Case
E11357	Extra Shelf, 10.5 x 8 inch, Plastic(not autoclavable)	10.5" x 8"	1

SPECIFICATIONS:	E11355	E11356
Voltage	220-240 V	220-240 V
Frequency	50-60 Hz	50-60 Hz
Temp. Range (Heating)	Ambient +5°C to 60°C	Ambient -15°C to 60°C
Temp. Operation	Only Heating	Heating & Cooling
Temp. Accuracy	±0.5°C (at 37°C)	±0.5°C (at 37°C)
Temp. Uniformity	±1.5°C (at 37°C)	±1.5°C (at 37°C)
Temp. Increment	1°C	l°C
Platform Dimensions	235 x 290 mm(9.5x11.5 in)	235 x 290 mm(9.5x11.5 in)
Operating Temp. Range	+4 to +65°C	+4 to +65°C
Exterior	335 x 370 x 475 mm	335 x 370 x 475 mm
Interior	260x235x325mm	260x235x325mm
Capacity	20L	20L
Weight	6.5 kg	6.5 kg





208 | Wavemax - Incu-shaker Mini

- Wavemax-Incu-Shaker Mini is a compact shaking incubator that can accept a variety of flasks, tubes, trays, etc.
- The standard platform features a non-slip surface ideal for staining trays, tissue culture flasks, and Petri dishes.
- Abdos Incu-Shaker offer exceptional temperature uniformity and accuracy due to a proprietary heat distribution technology that ensures temperatures are precisely maintained throughout the chamber within 0.25%, even in the corners.
- Featuring the MAGIC Clamp platform, this shaker lets you customize the size and types of vessels being used by simply exchanging clamp sizes. Clamps utilize a powerful magnetic base to securely attach to the shaking platform without screws, bolts, or tools.
- · Speed, temperature, and time are controlled with a push of a button and are displayed on the LED panel.
- · Over temperature and over speed controls ensure safety, long life, and sample integrity.
- Advanced motor isolation system minimizes noise and vibration.



WAVEMAX	- INCU-SHAKER		
Code	Product	Platform Dimension	No. / Case
E11920	Wavemax-Incu-Shaker Mini with Non-Slip Rubber Mat	9.5" x 11.5"	1
Spare Acc	essories		
Code	Product	Platform Dimension	No. / Case
E11925	Universal Magnetic Platform for Flasks and Tube racks (For E11920)	9.5" x 11.5"	1

Kindly Note: Flask clamps and Fixed Platforms are sold separately, see page No. 159 for complete listing

Voltage	220-240V
Frequency	50-60Hz
Speed	Variable, 30 to 300rpm
Speed Adjustment	lrpm
Shaking Orbit	19mm
Temperature Range	Room Temperature +5°C to 70°C
Temperature Increment	0.1°C
Temperature Accuracy	±0.1°C
Temperature Uniformity	±0.25%
Timer	1 min to 48 hours/continuous
Platform Dimensions	23.5 x 29cm (9.5"x11.5")
Overall Dimensions (W x D x H)	280 x 410 x 330mm
Weight	11.5kg



Spare .	Accessories for E11260,E11290 & E11920		Spare A	Spare Accessories for E11290 & E11920									
Code	Product	No. / Case	Code	Product	No. / Case								
E11928	Universal Magnetic Clamp for 125ml, 250ml, 500ml flasks	1	E11939	Magnetic Clamp for Tube Rack 4x500ml or 600ml conical bottles	1								
E11929	Magnetic Clamp for 1000 ml flask	1	E11940	Magnetic Clamp for Tube Rack 12x1.5/2.0 ml tubes horizontal	1								
E11930	Magnetic Clamp for 500 ml flask	1	E11941	Magnetic clamp for tube Rack 4x15ml tubes horizontal	1								
E11931	Magnetic Clamp for 250 ml flask	1	E11942	Magnetic Clamp for Tube Rack 2x50ml tubes horizontal	1								
E11932	Magnetic Clamp for 125 ml flask	1	E11943	Magnetic Clamp for tilted holder for 15ml and 50ml tube rack	1								
E11933	Magnetic Clamp for 50 ml flask	1	E11944	Universal spring Platform	1								
E11934	Magnetic Clamp for one Microplate	1	E11948	Platform for 5 x 500 ml	1								
E11935	Magnetic Clamp for Tube Rack 30x15ml &20x50ml tubes	1	E11949	Platform for 8 x 250 ml	1								
E11936	Magnetic Clamp for Tube Rack 72x14mm culture tubes	1	E11950	Platform for 1 x 125 ml	1								
E11937	Magnetic Clamp for Tube Rack 32x15ml, tubes	1	E11951	Platform for 4 microplates	1								
E11938	Magnetic Clamp for Tube Rack 15x50ml, tubes	1											

209 | AEROVAC-Oil-Free Vacuum Pumps

- ABDOS Aerovac Oil Free Vacuum Pump is a compact, lightweight and mobile oil-free piston Vacuum pump.
- It features manual pressure control and a gauge for pressure monitoring.
- The unit is maintenance-free and its oil-free design reduces its environmental impact.
- \bullet The pump can achieve flow rates of up to 52 L/min and an ultimate vacuum down to 13 mbar.
- A wide range of optional accessories are available.
- Application Areas: Abdos Vaccum Pump is useful for Biology laboratories, Food industry, Microbiological detection, Vacuum extraction, Liquid filtration, Vacuum drying, Suspended solids measurement.



Oil Free Va	ccum Pump		
Code	Product	Product Dimension	No. / Case
E11800	Aerovac-300	Vacuum: 100mbar; Max. Flow Rate: 17 L/min(220V)	1
E11801	Aerovac-400	Vacuum: 100 mbar; Max. Flow Rate: 34 L/min(220V)	1
E11802	Aerovac-600	Vacuum: 100 mbar; Max. Flow Rate: 60 L/min(220V)	1
E11803	Aerovac-410	Vacuum: 30 mbar; Max. Flow Rate: 19 L/min(220V)	1
E11804	Aerovac-610	Vacuum:30 mbar; Max. Flow Rate: 40 L/min(220V)	1
E11805	Aerovac-430	Vacuum:150/ 5.5 bar(max.pressure); Max. Flow Rate: 28L/min(220V)	1
E11806	Aerovac-800	Vacuum: 100 mbar; Max. Flow Rate: 80 L/min(220V)	1
E11807	Aerovac-810	Vacuum: 30 mbar; Max. Flow Rate: 50 L/min(220V)	1

Spare Accs	sories		
Code	Product	Product Dimension	No. / Case
E11810	Connectors	Outlet diameter: 9.5mm	1
E11815	L-shape connector	Outlet diameter: 8mm	1
E11816	Quick connection outlet	Outlet diameter: 12mm	1
E11821	Silencer	Suitable for Aerovac300 / Aerovac400 / Aerovac410	1
E11822	Silencer	Suitable for Aerovac600 / Aerovac610	1
E11823	Vacuum regulator / filter	Incl. pressure gauge	1
E11824	Vacuum regulator / filter	without pressure gauge	1
E11825	Foot pedal	Suitable for Aerovac series vacuum pumps	1
E11826	FEP tubing	Outer diameter: 6mm, Inner diameter: 4mm, Thickness: 1 mm, Length : 1m	1
E11830	Silicon tubing	Outer diameter: 12mm, Inner diameter: 6mm, Thickness: 3mm, Length : 1m	1



SPECIFICATIONS:	E11800	E11801	E11802	E11803	E11804	E11805	E11806	E11807
Volt	220 V	220 V	220 V					
Frequency	50 Hz	50 Hz	50 Hz					
Maximum Power	60 W	80 W	190 W	80 W	210 W	125 W	220 W	220 W
Maximum Current	0.3 A	0.4 A	1.0 A	0.4 A	1.0 A	0.6 A	1.0 A	1.0 A
Maximum Vacuum	100 mbar	100 mbar	100 mbar	30 mbar	30 mbar	150/5.5 bar	100 mbar	30 mbar
Maximum Flow Rate	17 L/min	34 L/min	60 L/min	19 L/min	40 L/min	28 L/min	80 L/min	50 L/min
Motor Rotation	1450 rpm	1450 rpm	1450 rpm					
Dimension (W x D x H)mm	272 x 142 x 165	310 x 152 x 165	340 x 155 x 195	310 x 152 x 165	340 x 155 x 195	247 x 235 x 200	340 x 185 x195	340 x 185 x 195
Weight	4.4 Kg	5.4 Kg	8.6 Kg	5.4 Kg	8.6 Kg	5.5 Kg	8.6 Kg	8.6 Kg
Noise Level	50 dB	60 dB	52 dB	50 dB	52 dB	50 dB	52 dB	52 dB

General Conversion

Table

Instructions for using the Table

To Convert one unit of (A) into (B) multiply by (C)

To Convert one unit of (B) into (A) multiply by (D)

A	В	C (X 1 unit of A = B)	D (X 1 unit of B = A)	Α	В	C (X1 unit of A = B)	D (X 1 unit of B = A)
Inches	Centimetres	2.54	0.3937	Lb. per sq. in	H'd of water (M.)	0.7	1.4285
Feet	Centimetres	30.48	0.0328	Lb. per sq. in	Atmospheres	0.068	14.7
Yards	Metres	0.194	1.094	Tons per sq. in	Kgm. / sq. mm.	1.575	0.635
Miles	Metres	1, 609.30	0.000621	Lb. per sq. ft	Kgm. / sq. metre	4.883	0.205
Nautical miles	Metres	1, 853.2 7	0.000539	Lb. per cub. yd.	Kgm. / cub. metre	0.593	1.686
Square inches	Sq. cms	6.45	0.155	Lb. per cub. ft	Kgm. / cub. metre	16.02	0.0624
Square feet	Sq. Metres	0.093	10.764	Lb. per gallon	Kgm. / litre	0.0998	10.02
Square yards	Sq. Metres	0.836	1.196	Foot-Ib	K'gram-metres	0.1833	7.23
Cubic inches	Cub. cms .	16.39	0.061	Foot-tons	Tonne-metres	0.33	3
Cubic feet	Litres	28.3	0.0353	Hors-Power	Force de Cheval	1.014	0.9861
Cubic feet	Gallons	6.24	0.1602	Hors-Power	Watts	746	0.00134
Cubic yards	Cub. metres	0.765	1.308	Hors-Power	Ftlb / min	33, 000	0.00003
Pounds (Troy)	Kilogrammes	0.3732	2.68	Hors-Power	Kgm. / sec	73	0.01316
Ounces (Troy)	Grammes	31.1	0.03216	Watts	FtIb. / min	44	0.0227
Pounds (Avoir.)	Kilogrammes	0.4536	2.2046	Watts	Kgm. / sec	0.1	10
Pounds (Avoir.)	Grains (Troy)	7, 000	0.000143	Heat units	Cal ories	0.252	3.97
Ounces (Avoir.)	Grammes	28.35	0.0353	Atmospheres	Lb. / sq. inch	14.7	0.068
Grains	Grammes	0.065	15.38	German candles	English candles	0.90	1.1111
Cwt.	Kilogrammes	50.8	0.01968	Carcels	Candles.	9.55	0.1047
Tons	Kilogrammes	1, 016	0.000984	Joules	Ft. / Ib	0.737	1.357
Gallons	Litres	4.546	0.22	Miles / hour	Ft. / Min	88	0.01134
Gallons of water	Pounds	10	0.1	Metres / sec	Ft / Min .	197	0.00508
Pounds of water	Litres	0.454	2.202	C.H.U	B. Th. U .	1.8	0.5555
Lb per sq. in .	Gm./sq. cm.	70.3	0.0142	Centipoise	Lb. force sec. / Sq. ft.	0.208	4.8
Lb per sq. in .	H'd of water (ft.)	2.3	0.434				
To obtain	From		Multiply-by above	To obtain	From		Multiply-by above

PERIODIC TABLE OF THE ELEMENTS

	18.	helium 2 2 4.0026	Neon 10 10	20.180	argon 18	39.948	krypton 36	83.798	xenon 54	131.29	Reson	radon 118 000
		17.	fluorine o	18.998	chlorine 44	35.453	bromine 35	79.904	iodine 53	126.90	astatine 85 At	astatine 117
10		16.	oxygen	15.999	sulfur P P	32.065	selenium 34	V 28.96	tellurium 52	127.60	84 84	polonium 116
Semi-Metallics	Actinides	15.	nitrogen 7	14.007	phosphorus 15	30.974	arsenic 33	AS 74.922	antimony 51	121.76	Bismuth 833	bismuth 115
Sem	Acti	4.	carbon ©		silicon 4 to		germanium 32	72.64 72.64	≅ 8 (,	118.71	82 82 0	lead 14
n Metals	des	13.	boron 5	10.811	aluminium 13	26.982	gallium 31	6 8.723	mipui 64 C	114.82	thallium 81	thallium 113
Transition Metals	Lanthanides					15.	zinc 30	65 .38	cadmium 48	112.41	80 80	ō
als							copper 29	63.546	silver 47	107.87	Au	roentgenium
Alkaline-Earth Metals	es		ımber	mbol	eight	10.	nickel 28	28.693	palladium 46	106.42	platinum 78 78 78 78 78 78 78 78 78 78 78 78 78	darmstadtium 110
Alkaline-	Inert Gases		Atomic Number	Atomic Symbol	Atomic Weight	· 0	cobalt 27	58.933	rhodium 45	102.91	iridium 77	meitnerium 109 Mt
tals						ω.		1 000	ruthenium 44		osmium 76 OS	hassium 108 HS
Alkali Metals	Halogens	KEY	hydrogen		1.0079	7.	manganese 25	54.938		[86]	-	bohrium 107
vi	als		hy		_	9.	chromium 24	51.996	molybdenum 42	95.96	tungsten 74	seaborgium 106
Non-Metals	Other Metals					5.	-					dubnium 105
						4.	titanium 22	47.867	zirconium 40	91.224	hafnium 72 Hf	rutherfordium 104
						ა.	scandium 21	1 44.956	yttrium 39	88.906	57-71	89-103
		2.	beryllium 4	9.0122	magnesium 12	24.305	calcium 20	40.078	strontium 38	87.62	56 Danium	radium 88
	-	hydrogen	lithium 3	6.941	sodium 1	22.990	potassium 19	39.098	and	85.468	Caesium 55 CS	francium 87

174.97	lawrencium 103
	102 102 NO [259]
thulium 69 69 168.93	nendelevium 101 Md
erbium 68	fermium 100 Fm
holmium 67 164.93	einsteinium 99 199 [252]
dysprosium 66 66 105 105 105 105 105 105 105 105 105 105	californium 98
terbium 65 65 158.93	97 97 M E47]
gadolinium 64 God 157.25	Ourium 96 CM CM CM P (247)
europium 63 151.96	americium 95 Am [243]
Samarium 62 Sm 150.36	94 94 DU [244]
promethium 61 Pm [145]	93 83 N
neodymium 60 60 144.24	uranium 92
praseodymium 59 PT	protactinium 91
58 58 140.12	thorium 90 90 232.04
138.91	actinium 89 AC [227]

Physical Properties

Of Abdos Labware

Resin	Max Use	Brittleness	Transparency			Sterilizator	1		Specific Gravity	Flexibility	Water Absorption
	Temp °C	Temp °C		Autoclaving	Gas	Dry Heat	Radiation	D i sinfectant			%
HDPE	120	-100	Translucent	No	Yes	No	Yes	Yes	0.95	Rigid	< 0.01
LDPE	80	-100	Translucent	No	Yes	No	Yes	Yes	0.92	Excel	< 0.01
PC	135	-135	Clear	Yes+	Yes	No	No	Yes	1.20	Rigid	0.35
PMMA	50	20	Clear	No	Yes	No	Yes	Some	1.20	Rigid	0.30
PP	135	0	Translucent	Yes	Yes	No	No	Yes	0.90	Rigid	< 0.02
PS	90	20	Clear	No	Yes	No	Yes	Some	1.05	Rigid	0.05
PSF	165	-10	Clear	Yes	Yes	Yes+	Yes	Yes	1.24	Rigid	0.30
PTFE	270	-200	Opaque	Yes	Yes	Yes	No	Yes	2.17	Excel	< 0.01
PVDF	110	-62	Translucent	Yes	Yes	No	No	Yes	1.75	Rigid	0.05
TPX*	175	20	Clear	Yes	Yes	Yes+	No	Yes	0.83	Rigid	< 0.01

Sterilization

• Autoclaving (121°C, 15 psi for 20 minutes) Clean and rinse item with distilled water before autoclaving. Certain chemicals which have no appreciable effect on resins at room temperature may cause deterioration at autoclaving temperatures.

ALWAYS COMPLETELY DISENGAGE THREADS BEFORE AUTOCLAVING.

· Gas - Ethylane oxide, formaldehyde.

- Dry Heat 106°C for 120 minutes.
- Disinfection Benzalkonium chloride, Formalin, Ethanol, etc.
- Radiation Gamma irradiated at 2.5 Mard with unstabilized plastic.
- + Sterilizing reduces mechanical strength. Do not use PC vessels for vacuum application if they have been autoclaved.

Chemical Resistance for ABDOS Labware

Class of Substance at Room Temperature	HDPE	LDPE	PC	PMMA	PP	PS	PSF	PTFE	PVDF	TPX*	Resin (Code High-density polyethene
Acids, Dilute or Weak Acids, Strong and Concentrated Alcohols, Aliphatic Aldehydes Bases Esters Hydrocarbons, Aliphatic Hydrocarbons, Hologenated	E E G G G G F	E E G F F N	E N G F N N F N N N	G N N G F N G	E E G G F F	E F N E N N N N	E G G F E N G N	E E E E E E	E E E G E E N	E E G F F N	LDPE PC PMMA PP PS PSF PTFE PVDF TPX*	Low-density polyethylene Polycorbonate
Ketones Oxidizing Agents, Strong	G	G	N N	N	G F	N N	N G	E	N G	F		

Chemical Resistance Classification

- E = Excellent 30 Days of constant exposure cause no damage. Plastics may even tolerate for years.
- G = Good Little or no damage after 30 Days of constant exposure to the reagent.
- F = Fair Some effect after 7 days of constant exposure to the reagent, like cracking, loss of strength or discoloration.
- N = Not Recommended Not for continuous use. Immediate damage may occur.

^{*}TPX is the registered Trade Mark of Mitsui & Company Limited

Thermoplastics Chemical and Properties

CHEMICAL STABILITY OF PLASTICS

	PT	FE	РМР	(TPX)	Р	Р	HD	PE	LC	PE	Р	С	P0	M	P.	A	SA	ιN	РМ	MA	Р	S	NR
MEDIUM	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C
Acetaldehyde	E	Е	G	F	Е	F	Е	G	Е	F	G	F	Е	Е	G		F	F	F	F	F	F	F
Acetic acid (glacial acetic acid), 100%	Е	Е	Е	G	Е	G	Е	Е	Е	G	F	F	F	F	F	F					F	F	G
Acetic acid 50%	Е	Е	Е	Е	Е	Е	E	Е	Е	Е	Е	G	G	F	F	F	Е	G	F	F	G	G	F
Acetic anhydride	Е	Е	Е	G	G	G	G	G	F	F	F	F	F	F	G	G					F	F	G
Acetone	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	F	F	Е	Е	Е		F	F	F	F	F	F	G
Acetonitrile	Е	Е	G	F	Е	G	Е	G	Е	G	F	F	Е		Е		F	F	F	F	F	F	F
Acetophenone	Е	Е	G	F	G	G	G	G	F	F	F	F	Е		Е		F	F	F	F	F	F	F
Acetyl chloride (acetic acid chloride)	Е	Е			Е		Е		Е		F	F			F	F	F	F	F	F	F	F	F
Acetylacetone	Е	Е	Е		Е		E		Е		F	F	Е				F	F	F	F	F	F	F
ACRYLIC acid(2- propenic acid)	Е	Е	Е		Е		Е		Е		F	F	F	F			F	F	F	F	F	F	F
Acrylonitrile	Е	Е	F	F	G	F	Е	Е	Е	Е	F	F	F	F	Е		F	F	F	F	F	F	F
Adipic acid	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е		Е	Е	Е	Е	Е	Е	E
Allyl alcohol(2-propan-1-ol)	Е	Е	Е	G	Е	Е	Е	Е	Е	Е	G	G	Е	Е	G		G	F	F	F	G	G	G
Alumminium chloride	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	F	F	Е	G	G	F	Е	Е	Е	Е	Е	Е	G
Alumminium hydroxide	Е	Е	Е	G	Е	Е	Е	Е	Е	Е	G	F	Е	Е	Е	Е	G	G	G	G	G	G	E
Amino acid	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е
Ammonium chloride	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	G	Е	Е	Е		Е	Е	G	G	Е	Е	E
Ammonium fluoride	Е	Е	Е	Е	Е	Е	E	Е	Е	Е	G	G	Е	Е	E		Е	Е	G	G	Е	Е	F
Ammonium hydroxide,30%(ammonia)	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	F	F	G	G	G		Е	G	Е	Е	G	F	E
Ammonium sulphate	Е	Е	Е	Е	Е	Е	E	Е	Е	Е	E	Е	Е	Е	E		Е	Е	E	Е	Е	Е	G
n-Amyl acetate (pentyl acetate)	Е	Е	Е	G	G	F	E	G	G	F	F	F	Е	Е	G		F	F	Е	Е	F	F	G
Amyl alcohol (pentanol)	Е	Е	Е	Е	Е	Е	E	Е	Е	Е	Е	Е	Е	Е	Е		Е	Е			G	G	G
Amyl chloride (chloropentane)	Е	Е	F	F	F	F	F	F	F	F	F	F	E	Е	Е		F	F	F	F	F	F	F
Aniline	E	E	E	G	E	E	E	E	E	G	G	F	G	G	G	F	F	F	F	F	F	F	F
Aqua regia	E	E	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Barium chloride	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E
Benzaldehyde	E	E	E	E	E	E	E	E	E	E	G	F	E	E	G		F	F	F	F	F	F	F
Benzene	E	E	G	G	E	G	E	E	G	F	F	F	E	G	E		F	F	F	F	F	F	F
Benzoyl chloride	E	E	G	G	E	G	E	E	G	F	F	F	E	G	F	F	F	F	F	F	F	F	F
Benzyl alcohol	E	E	G	F	G	F	G	F	G	F	G	G	E	E	F	F	F	F	F	F	F	F	F
Benzyl chloride	E	E		ļ.						•			E	_	E			·			F	F	F
Benzylamine	E	E	G		G		G		G	F	F	F	E		_		F	F	F	F	F	F	F
Boric acid, 10%	E	E	E	Е	E	Е	E	Е	E	F	E	E	E	Е	E		E	E	E	E	E	E	E
Bromine	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Bromobenzene	E	E	F	F	F	F	F	F	F	F	F	F	'	'	E	'	F	F	F	F	F	F	F
Bromoform	E	E	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Bromonapthalene	E	E	ı.	i.	<u>'</u>				•				•	•	•		F	F		i.	F	F	
Butanediol	E	E	Е	Е	Е	Е	E	Е	Е	Е			Е	E	E		F	F			F	F	G
1-Butanol (butyl alcohol)	E	E	E	G	E	E	E	E	E	E	G	G	E	E	E	G	E	G	G	F	G	F	E
n-Butyl acetate (acetic acid n-butyl ester)	E	E	E	G	G	G	E	E	G	G	F	F	E	G	E	0	F	F	F	F	F	F	F
Butyl methyl ether	E	E	E	F	E	G	G	F	G	F	F	F	E	E	_		F	F	F	F	F	F	F
Butylamine	E	E	_	i i	_		0	<u> </u>	-		'	H	E	E			F	F	<u>'</u>	<u>'</u>	F	F	F
Butyric acid (butanoic acid)	E	E			F	F	G	F	F	F	G	F		_	G	G	F	F			F	F	F
Calcium carbonate	E	E	Е	Е	E	E	E	E	E	E	E	E	Е	Е	E	E	E	E	E	Е	E	E	E
Calcium Chloride	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	E	E	E
Calcium Chloride Calcium hydroxide	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	1-	E	G	E	E	E	G	E
·	E	E	E	G	E	E	E	E	E	E	G	F	E	E	E	F	E	E	G	G	E	E	F
Carbon disulphide	E	E	F	F	F	F	F	F	F	F	F	F	E	E	G	г	F	F	F	F	F	F	F
Carbon disulphide	E	E	F	F	F	F	G	F	G	F	F	F	G		F	F	F	F	G	F	F	F	F
Carbon tetrachloride	-		-	-	٢	F	U	٢	G	۲	-	٢	G	G	F							F	r
Chloroacetaldehyde, 45%	E	E	-		_		_	_	_	_		_	_	_		F	F	F	F	F	F	F	
Chloroacetic acid (monochloroacetic acid)	E	E	Е	G	Е	G	E	Е	Е	Е	G	F	F	F	F	F	F	F	G	F	G		F
Chloroacetone	Е	Е															F	F	F	F	F	F	G

	PTI	FE	PMP(TPXI	Р	Р	HD	PE	LD	PE	PC	.	PO	м	P/	<u> </u>	SAI	v I	PMI	MΑ	Р	s	NR
MEDIUM		50°C	20°C	50°C						_	20°C				_		20°C						20°C
Chlorobenzene	Е	Е	F	F	F	F	F	F	F	F	F	F			F	F	F	F	F	F	F	F	F
Chlorobutane	Е	E	G	F	G	F	G	F	G	F			F	F			F	F	F	F	F	F	F
Chloroform	Е	Е	G	F	F	F	G	F	G	F	F	F	F	F	G	F	F	F	F	F	F	F	F
Chloronapthalene	Е	Е											F	F									F
Chlorosulphonic acid	Е	Е											F	F	F	F							F
Cromic acid, 10%	Е	Е	Е	Е	Е	E	Е	Е	Е	Е	Е	G	G	G	F	F	F	F	G	F	F	F	F
Cromic acid , 50%	E	E	G	G	G	G	E	G	E	G	G	F	F	F	F	F	G	G	F	F	F	F	F
	ļ.	_		_		_		_	_		_			L.		·				Ė		Ľ	
Cromic sulphuric acid	E	Е	G	F	F	F	F	F	F	F	F	F	F	F	F	F	G	G	F	F	G	G	F
Copper sulphate	E	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	E	E		Е	G	Е	E	Е	E	G
Cresol	E	Е	F	F	G	G	G	F	F	F	F	F			F	F					F	F	F
Cumene(Isopropylbenzene)	E	Е	F	F	G	F	E	G	G	F	F	F	Е	F			F	F	F	F	F	F	F
Cyclohexane	E	Е	F	F	G	F	G	F	G	F	F	F	Е	E	E						F	F	F
Cyclohexenone	E	E	G	G	G	F	G	F	F	F	F	F			Е						F	F	F
Cyclopentane	E	Е	G	F	G	F	G	F	F	F	F	F									F	F	F
Decane	Е	Е	G		G		G	F			G		Е										F
1-Decanol	Е	Е	Е		Е		Е				G		Е				G				G		G
Di-ethylene glycol	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	G	Е	G	G		Е	Е	F	F	G	F	E
Dibenzyl ether	Е	Е	G		Е		Е						Е				F	F	F	F	F	F	F
Dibromoethane	Е	Е																					
Dibutylphthalate	Е	Е	Е	G	Е	G	G	F	G	F	F	F	Е	Е			F	F	F	F	F	F	F
Di-chloroacetic acid	Е	Е	Е	Е	G	F	G	G	G	F	G	F			F	F					G	F	F
Dichlorobenzene	Е	Е	F	F	G	F	G	F	G	F	F	F	F	F	Е		F	F	F	F	F	F	F
Dichloroethane	Е	Е	G	F	G	F	G	F	G	F			F	F	G								F
Dichloromethane (Methylene chloride)	Е	Е	G	F	G	F	G	F	G	F	F	F			G	F					F	F	F
Diesel oil	Е	Е	G	F	Е	G	Е	G	G	F	F	F	Е	Е	Е	Е	F	F	G	F	F	F	F
Diethanolamine	Е	Е			G		G				F	F					F	F	F	F	F	F	
Diethyl ether	Е	Е	F	F	G	F	G	F	F	F	F	F	Е	Е	Е	Е	F	F	F	F	F	F	F
Di-ethylamine	Е	Е	G	G	G	F	G	F	F	F	F	F									G	G	G
1,2 Diethylbenzene	Е	Е	F	F	F	F	G	F	F	F	G	F									F	F	F
Dimethyl sulphoxide(DMSO)	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	F	F					F	F	F	F	F	F	
Dimethylaniline	Е	Е									F	F					F	F	F	F	F	F	F
Dimethylformamide(DMF)	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	F	F	Е	Е	E		F	F	F	F	F	F	G
1,4-Dioxane	Е	Е	G	G	Е	G	Е	Е	Е	G	G	G	G	G	E		F	F	F	F	F	F	F
Diphenyl ether	Е	Е											G		G		F	F	F	F	F	F	F
1,2 Ethanediol (ethylene glycol, glycol)	Е	E	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	G	Е	Е	Е	Е	Е	Е	F
Ethanol (ethyl alcohol)	E	E	E	G	E	Е	E	E	E	E	E	G	E	E	E	-	G	F	F	F	G	F	G
Ethanolamine	Е	Е			Е																		F
Ethyl acetate (acetic acid ethyl ester)	Е	Е	G	F	Е	G	Е	Е	Е	Е	F	F			Е						F	F	F
Ethyl methyl Ketone(MEK)	E	E	F	F	E	G	G	F	G	F	F	F	F	F	E		F	F			F	F	F
Ethylbenzene	E	E	F	F	F	F	F	F	F	F	F	F					F	F	F	F	F	F	F
Ethylene Oxide	E	E	G	F	G	F	G	G	G	G	G	F	Е	Е	G		F	F	F	F	F	F	F
Fluroacetic acid	E	-				<u>'</u>					F	F	F	F			F	F	F	F	F	F	F
Formaldehyde, 40%	E	E	Е	E	E	E	E	E	Е	E	E	G	E	E	E	G	E	E	F	F	F	F	G
Formanide	E	E	E	E	E	E	E	E	E	E	-	-	F	F	E	<u> </u>	_	-	L'	Ė		i i	E
Formic acid, 98-100%	E	E	E	G	E	E	E			E	Е	G	F	F	F	F	G	G	F	F	E	G	G
Gasoline	E	E	G	G	G	G	E	E	E G	F	G	F	E	E	E	<u> </u>	F	F	E	<u>'</u>	F	F	F
	E	E	E	E	E	E	E	E	E	E	E	E	G	G	E	Е	E	E	E	F	E	E	G
Glycerine	-										E	E	G	U		F	E	E	E	E	E	E	
Glycolic acid, 70%	E	E	E G	E F	E	E G	E	E G	E G	E F	F	F	E	E	F E	-	F	F	G	F	F	F	E F
Heating oil [Diesel oil]													-				-	_					
Heptane	E	E	G	G	G	G	G	G	G	F	E	G	-	-	E		-	-	G	F	F	F	F
Hexane	E	E	G	F	E	G	E	G	G	F	F	F	Е	E	E		Е	Е	G	G	F	F	F
Hexonic acid	E	E				_			_	_									E				-
Hexanol	E	E	E	E	E	E	E	E	E -	E									E				G
Hydrochloric acid,10%	E	E	E	E	E	E	E	E	E	E	F	F	F	F	F	F	G	F	G		E	E	G
Hydrochloric acid,20%	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	F	F	F	F	F	F	G	F	G	F	Е	Е	G
Hydrochloric acid, 37%	Е	Е	Е	Е	E	Е	E	Е	E	E	F	F	F	F	F	F	G	F	G	F	G	G	G

MEDIUM		_						PE		PE	P		P0	171	P/	۱ ۱	SA	N	PMI	MA	P	'S	NR
	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C
Hydrofluoric acid, 40%	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	F	F	F	F	F	F	Е	G	F	F	Е	Е	F
Hydrofluoric acid, 70%	Е	G	Е	G	Е	G	Е	G	Е	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Hydrogen bromide	Е	Е	Е	Е	E	Е	Е	Е	Е	Е	Е	Е	F	F	F	F					G	F	G
Hydrogen peroxide, 35%	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	F	F	F	Е	Е	F	F	Е	Е	F
Hydroiodic acid	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е													
Isoamyl alcohol (3-methyl-1-butanol)	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е			Е	Е									G
Isobutanol (isobutyl alcohol)	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е			G	F	G	F	G	G	E
Isooctane	Е	Е									G				Е		G	F			G	F	F
Isopropanol (2-propanol)	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е		Е	F	G	F	G	G	E
Isopropyl ether	Е	Е	F	F	F	F	F	F	F	F	F	F			F	F					F	F	F
Lactic acid (2-hydroxypropionic acid)	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	F	G	F	Е	Е	G	F	Е	Е	G
Lugol's solution (Iodine/potassium iodine solution)	Е	Е	Е	G	Е	Е	F	F	F	F	G	F	G	G			G	F	F	F	G	F	E
Mercury	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е		Е	Е	Е	Е	Е	Е	E
Mercury chloride	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	G	F	F	Е	Е	Е	Е	Е	G	E
Methanol	Е	Е	Е	Е	E	Е	Е	Е	Е	G	Е	G	Е	Е	G		G	F	F	F	G	F	G
Methoxybenzene	Е	Е									F	F	G				F	F	F	F	F	F	F
Methyl butyl ether	Е	Е	E	G	Е	Е	G	F	F	F	F	F	G				F	F	F	F	F	F	F
Methyl ethyl ketone(MEK)	E	E	F	F	E	G	G	F	G	F	F	F	F	F			F	F	F	F	F	F	F
Methyl formate (formic acid methyl ester)	E	E					-		-		F	F	E				F	F	F	F	F	F	F
Methyl propyl ketone	E	E	G	G	E	G	Е	Е	Е	G	F	F	E	E			F	F	F	F	F	F	F
Methylene chloride (dichloromethane)	E	E	F	F	G	F	G	F	G	F	F	F	F	F	G	F	F	F	F	F	F	F	F
Mineral oil	E	E	E	E	E	E	E	E	E	G	F	F	E	E	-		E	Ė	E	E	E		F
Monochloroacetic acid	E	E	E	G	E	G	E	E	E	E	G	F	F	F	F	F	F	F	G	F	G	F	F
Nitric acid, 10%	E	E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	E	G	E	G	F	F	F
Nitric acid, 30%	E	E	G	F	G	F	G	F	G	G	E	G	F	F	F	F	G	F	G	G	F	F	F
Nitric acid, 70%	E	E	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F.	F	F .
Nitrobenzene	E	E	F	F	F	F	G	F	F	F	F	F	G	F	F	F	F.	F	F	F	F	F	F
Oleic acid	E	E	i i							Ė	L'			_	G		F	F	F	F	F	F	F
Oxalic acid	E	E	E	Е	E	Е	Е	Е	Е	E	Е	Е	Е	Е	F	F	E	E	E	E	E	E	G
Ozone	E	E	E	E	G	F	G	F	G	F	F	F	F	F	F	F	G	G	E	G	G	G	F
n-Pentane	E	E		_	-	'	0		0		'	'	-		G	'	-	0			-	0	F
Peracetic acid	E	E									F	F	F	F									'
Perchloric acid	E	E	G	F	E	F	E	F	E	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Perchloroethylene	E	E	F	F	F	F	F	F	F	F	F	F	E	G	F	F	G	G	G	F	F	F	F
Petroleum	E	E	G	G	G	F	G	F	G	F	G	G	E	E	E	'	- 0	0	E	'	F	F	F
Petrolium ether	E	E	-	0	-	1	0	'	G	<u>'</u>	0	0	E	E	E				E		F	F	F
Phenol	E	E	G	G	E	Е	E	Е	E	G	F	F	F	F	F	F	F	F	F	F	F	F	F
Phenyl ethanol	E	E		U	G		G			U	Г	Г	Г	Г	G	Г	Г	Г	Г	Г	Г	Г	Г
Phenylhydrazine	E	E			G		G								U								G
· ·	E	E	E	Е	E	E	E	E	E	E	Е	Е	Е	F	F	F	E	Е	F	F	E	G	F
Phosphoric acid, 85% Piperadine	E	E		_	E	_	E		_		_	-		'	'	'		_	'	1		U	F
Potassium chloride	E	E	E	Е	E	E	E	Е	Е	E	Е	Е	Е	E	Е		G	G	Е	E	G	G	E
Potassium Dichromate	E	E	_	_	_	_	_	_	-	_	_	-	-	_	F	F	0	J	_	_	J	9	G
Potassium Dichromate Potassium hydroxide	E	E	E	Е	E	E	E	E	Е	E	F	F	Е	E	E	'	G	G	E	E	G	G	G
Potassium nydroxide Potassium permanganate	E	E	E	E	E	E	E	E	E	E	E	E	G	G	F	F	E	G	E	E	E	E	F
	E	E	E	E	E	E	E	E	E	E	G	E	E	E	E	E	E	E	G		G	E	E
Propingie acid	E	E	E	G	E	G	E	G	G	F	F	F	F	F	G	G			U		G	F	F
Propionic acid Propionic acid Propionic acid Propionic acid	E	E	E	E	E	E	E	E	E	E	E			E	F	F	F	F	G		E		E
Propylene glycol (propanediol)												G	E			-	F			G		Е	F F
Pyridine	E	E	E	G	G	G	E	G	E	G	F	F	E	G	Е			F	F	F	F	F	F
Salicylaldehyde Salicylal a prid	E	E	E	E	E	E	E	E	Е	E	G	G	_	_	_		F	F			F	F	
Salicylic acid	E	E	E	E	E	E	E	E	E	E	-	_	F	F	Е		E	E	_	_	E	E	E
Silver acetate	E	E	E	E	E	E	E	E	E	E	E	E	G	G	_		G	G	G	G	G	G	E
Silver nitrate	E	E	E	E	E	E	E	E	E	E	E	E	G	G	E		E	E	E	E	G	G	E
Sodium acetate	E	E	E	E	E	E	E	E	E	E	E	E	E	G	E		E	E	F	F	E	E	E
Sodium Chloride	E _	E _	E _	E -	E	E _	E _	E	E	E _	E	E	E	E	E		E _	Е	E	E	E _	Е	E
Sodium dichromate	Е	Е	E	E	E	E	E	E	E	E	E	F	E	E	E		E	G	E	G	E	G	E
	_ '																				_		
Sodium fluoride Sodium hydroxide	E E	E	E	E	E	E E	E E	E E	E E	E	E F	E F	E E	E E	E	G	E	E	Е	Е	E	E	G G

Madhan	PT	FE	РМР	(TPX)	Р	Р	HD	PE	LE	PE	Р	С	PC	М	P.	A	SA	.N	PM	MA	Р	s	NR
Medium	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C
Sulphuric acid, 60%	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	G	F	F	F	F	Е	G	F	F	F	F	F
Sulphuric acid, 98%	Е	Е	Е	Е	F	F	G	F	G	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Tartaric acid	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	G	Е	Е	G	G	Е	Е	Е
Tetrachloroethylene	Е	Е													F	F							F
Tetrahydrofuran(THF)	Е	Е	G	F	F	F	G	F	G	F	F	F	G	G	Е		F	F	F	F	F	F	F
Tetramethylammonium hydroxide	Е	Е									F	F	F	F									
Toluene	Е	Е	G	F	G	F	G	G	G	F	F	F	Е	Е	Е		F	F	F	F	F	F	F
Tri-ethylene glycol	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	Е	G			Е	Е	G	G	Е	Е	G
Tri-propylene glycol	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	Е	G			Е	Е	G	G	Е	Е	Е
Trichloroacetic acid	Е	Е	Е	Е	G	F	G	G	G	F	G	F			F	F					G	F	G
Trichlorobenzene	Е	Е	G	G	F	F	F	F	F	F	F	F									F	F	
Trichloroethane	Е	Е	F	F	F	F	G	F	F	F	F	F	G	F	G		F	F	F	F	F	F	F
Trichloroethylene	Е	Е	F	F	F	F	G	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F
Trichlorotrifluoroethane	Е	Е													G		F	F			F	F	
Triethanolamine	Е	Е															F	F			F	F	G
Trifluoroacetic acid (TFA)	Е	G											F	F			F	F			F	F	
Trifluoroethane	Е	Е															F	F			F	F	F
Turpentine	Е	Е	G	G	F	F	G	F	G	F	F	F	Е	Е	Е		G	G	Е	Е	F	F	F
Urea	Е	Е	Е	Е	Ε	Е	Е	Е	Ε	Е	F	F	Е	Е	Е		Е	Е	Е	Е	Е	Е	Ε
Xylene	Е	Е	G	F	F	F	G	F	G	F	F	F	Е	Е	Е		F	F	F	F	F	F	F
Zinc Chloride, 10%	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	F	F	Е	Е	F	F	Е	Е	Ε
Zinc Sulphate, 10%	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	Е	G	F	F	F	Е	Е	G	G	Е	Е	G

E = Continuous exposure to media and solvents causes no harm to the product.

G = Continuous exposure for 7 -30 days to media and solvents causes minor damageto the product. (e.g. swelling, softening, mechanical strength, discolouration).

F= Not Suitable for continuous exposure to media and solvents. May damage the product. (e.g. deformation, cracking, liquification).

The above Chemical resistance chart is meant to be used as a guide only. As temperature, exposure time and functional conditions affect resistance and can vary for each application, Abdos highly recommends users to evaluate products under their own conditions prior to use. Abdos does not warrant (neither expressed or implied) that the information in this chart is accurate or that any material is suitable for any purpose.

WHAT IS GAMMA IRRADIATION?

Gamma rays are a form of electromagnetic radiation-like x-rays, but with higher energy. The primary industrial sources of gamma rays are radionuclide elements such as Cobalt 60, which emit gamma rays during radioactive decay. Gamma rays pass readily through plastics and kill bacteria by breaking the covalent bonds of bacterial DNA.

They are measured in units called kiloGrays (kGy).

Gamma irradiation provides a number of benefits in cost and sterility assurance. It can be applied under safe, well-defined, and controlled operating parameters, and is not a heat or moisture generating process. Consequently, there is no heat stress and condensate drainage or outgassing is not required. Most importantly, there is no residual radioactivity after irradiation.

DOSE VALIDATION

Gamma Radiation dose is validated according to IS. EN. ISO 11137-2 Method 1 to confirm the SAL $10^{\text{-}6}\,$

For that routine testing of bioburden & Sterility test carried out at our manufacturing facility.

VALIDITY OF STERILITY

We assure all sterile products have been sterile through Co-60 gamma radiation with valid certified dose and has been PASSED for all sterility tests. We confirm that the Sterile product would be Sterile until unless the packing pouch is not tampered/punctured/open or 3 yrs from date of Radiation.

SUITABILITY OF ABDOS PLASTICS FOR FOODSTUFF

The phthalates for which opinions have been given by EFSA (Europeann Food Safety Authority and TDI's (Tolerable Daily Intake) established for use in plastics for containers in food application, are not intentionally added in the manufacture of or the formulation of this product. The phthalates are di-isononly phthalate (DINP), DI-(2-ethylhexyl) phthalate (DEHP), di-nbutyl phthalate (DBP), di-iso-decyl phthalate (DIDP), butylbenzyl phthalate (BBP). In addition, di-iso-butyl phthalate (DIBP) has recently been classified by TC C&L of ECB (Commission Working Group on Classification & Labeling – European Chemicals Bureau) in accordance with the requirements of Directive 67/548/EC (Classification and labeling of dangerous substance), taking into account a NOAEL, the toxicity of DIBP is more than 100 times lower than DNBP's (product assessed by EFSA for use in plastics in contact with food). Phthalates are not used in the manufacture of or the formulation of any Abdos manufactured products.

Abdos manufactured products have passed the USP tests for a Class VI, physio-chemical testing and meets USP limits.

Abdos manufactured products are made from the base resin which meets the FDA requirements contained in the Code of Federal Regulation in 21 CFR 177. 1520 (a)(3)(i) and (c)3. 1a. 3. 2a. All other ingredients meet the requirements of their respective FDA regulations and 21 CFR 177.1520(b). All Abdos manufactured products meet the FDA criteria in 21 CFR 177.1520 for food contact applications, including cooking.

AUTOCLAVE GUIDE LINE

To ensure successful steam sterilization of your plastic labware please adhere to the following guideline: Autoclave all plastic consumables at 121°C for 20 minutes, 15psi/1 atm. Do not use a dry cycle as this may cause deformation or weakening of the plastic. Allow temperature within the autoclave to return to at least 80°C before removing product.

Autoclaving (steam sterilisation) is defined as the destruction or irreversible inactivation of all reproducible microorganisms under exposure to "saturated steam at a minimum of 120 °C." (DIN 58946-1, 1987). DIN EN 285 specifies a minimum exposure time (te) of 20 minutes (killing time and safety margin) at a sterilisation temperature of 121 °C. For the correct sterilisation procedure, including biological safety (DIN EN285), please contact your hygiene specialist.

Prior to autoclaving plastic labware, ensure that no soiling or residual contamination remains on the equipment. Otherwise, the residual contamination will bake on solidly during the autoclaving process.

Even substances that have no effect on the plastic at room temperature can still lead to destruction of the plastic during the autoclaving process. Additionally, microorganisms might not be killed effectively if they are protected by the residual contamination.

NOTES ON AUTOCLAVING

- Containers with screw tops or stoppers must be open during autoclaving to allow for pressure equalisation.
- Autoclaving of a closed container will lead to the deformation or destruction of the container.
- Plastic labware should be stood upright on a level surface during autoclaving to avoid shape deformation.
- Plastic labware should not be laid on its side during autoclaving.
- No mechanical stresses should be present during autoclaving.
- For example, do not stack items.
- Do not autoclave any container that contains residual contamination or even rinsing agent.
- Not all plastics are resistant to steam sterilisation! For example, polycarbonate loses its tensile strength.
- Mind the temperature limits for the plastics.
- Autoclavable products are identified with a "121 °C" symbol in this catalogue.

The surfaces of some plastics can be attacked by chemicals present during autoclaving, which can cause persistent clouding. Some transparent plastics can absorb minute quantities of steam, which can lead to reversible clouding. This clouding disappears upon drying, which can be accelerated through the use of a drying oven.

RPM VS. RCF "WHAT'S THE DIFFERENCE?"

RPM – stands for "Revolutions Per Minute" and is the speed that your rotor spins in your centrifuge.

RPM is specific to individual centrifuge brands and rotor sizes.

RCF – stands for "Relative Centrifugal Force" and is better known as g-force. This indicates the actual force resulting from the spinning action in the centrifuge.

It is g-force that drives sample separation.

The following equation can be used to convert RPM to RCF for any model centrifuge.

RCF = $0.00001118 \times \text{radius of rotation (cm)} \times \text{RPM2}$

Note: radius of rotation is given by the distance of the furthest most point of the tube from the axis of rotation. Please refer to your centrifuge user guide for radius value.

NON-PYROGENIC CERTIFICATE OF ANALYSIS

Every lot of Abdos Micro Tips, Micro Centrifuge Tubes, Centrifuge Tubes, Cryo Vials, Petri Dish, Radioimmunoassay (Ria) Vials, Pasteur Pipette & other products are tested for Pyrogenic.

This report certifies that samples of the above products obtained from finished products are Non-Pyrogenic. Endotoxin levels are <= 0.005 EU/device. Products were tested for Endotoxins as per USP by Chromogenic Assay Method.

PROCEDURE:

Lot samples of the products were extracted according to current FDA guidelines in Pyrogen free water and the extract solution was then assayed along with the positive and negative controls.

A. P11007 Lot no. A261118B

- B. P60116 Lot no. A251019A
- C. P10202 Lot no. M110919C07
- D. P10163 Lot no. A281119A
- E. P10401 Lot no. A110919A
- F. P10301 Lot no. M140919C06
- G. P10901 Lot no. M230919B12

RESULTS:

Endotoxin levels <= 0.005 EU/ml

COMMENTS:

Current FDA/USP guidelines set endotoxin limits for medical devices at 0.5 EU/ml, and 0.06 EU/ml for devices that contact cerebral spinal fluid. We test products according to the guidelines for medical devices that contact cerebral spinal fluid.

RNASE FREE CERTIFICATE OF ANALYSIS

Every lot of Abdos Micro Tips, Micro Centrifuge Tubes, Centrifuge Tubes, Cryo Vials, Petri Dish, Radioimmunoassay (Ria) Vials, Pasteur Pipette & other products are tested for RNase.

This report certifies that samples of the above products obtained from finished products are free of any detectable RNase contamination. Products were tested for RNase activity by the following protocol.


PROCEDURE:

Products were extracted in RNase free water. The extract was then added to an RNA standard. The RNA standard was incubated at 37°C for 1 hour then heated to 65°C for 5 minutes. RNA samples were then run on an agarose gel, photographed, and evaluated for degradation.

Lane (A) P10105 Lot No-1503001.(B) P60102 Lot No-1503007.(C) RNA standard exposed to RNase as a positive control (D) unexposed RNA standard as a negative control.

CONCLUSIONS:

No visible degradation is present in the product samples confirming that the products can be considered RNase free.




DNASE FREE CERTIFICATE OF ANALYSIS

Every lot of Abdos Micro Tips, Micro Centrifuge Tubes, Centrifuge Tubes, Cryo Vials, Petri Dish, Radioimmunoassay (Ria) Vials, Pasteur Pipette & other products are tested for DNase.

This report certifies that samples of the above products obtained from the finished products are free of any detectable DNase contamination. Products were tested for DNase activity by the following protocol.

PROCEDURE:

Products were extracted in DNase free water. The extract was then added to a DNA standard. The DNA standard was incubated at 37° C for 1 hour then heated to 65° C for 5 minutes. DNA samples were then run on an agarose gel, photographed, and evaluated for degradation.

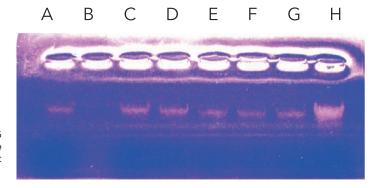

Lane (A) unexposed DNA standard as a negative control, (B) DNA standard exposed to DNase as a positive control, (C) P10105 Lot No-1503001, (D) P60102 Lot No-1503007, (E) P10202 Lot No-1503036, (F) P10401 Lot No-1503009, (G) P10403 Lot No-1503010, (H) P60103 Lot No-1502010.

CONCLUSIONS:

No visible degradation is present in the product samples confirming the products can be considered DNase free.

ATP FREE CERTIFICATE OF ANALYSIS

Every Lot of Abdos Micro Tips, Micro Centrifuge Tubes, Centrifuge Tubes, Cryo Vials, & Other Products are tested for ATP Free.

A. P11007 Lot no. A261118B

B. P60116 Lot no. A251019A

C. P10202 Lot no. M110919C07

D. P10163 Lot no. A281119A E. P10401 Lot no. A110919A

PROCEDURE:

Procedure is to provide guidelines for ATP FREE Test (by Glucose Oxidase/ATP Method). Glucose is a widely distributed simple sugar with an active aldehyde group. Estimation of glucose by glucose oxidase gives the true glucose concentrations eliminating the interference by other reducing sugars.

PRINCIPLE:

Glucose oxidase catalyses the oxidation of alpha-D-glucose to D-glucono-1, 5 lactone (gluconicacid) with the formation of hydrogen peroxide. The oxygen liberated from hydrogen peroxide by peroxide reacts with the O-dianisidine & oxidizes it to a red chromophore product. Read the colour intensity at 540 through UV Spectrophotometer or at 450 through ELISA.

Glucose + O₂

Glucose Oxidase -> H_2O_2 + Gluconic Acid H_2O_2 +O-dianisidine Peroxidase -> Red colour product

CONCLUSIONS

The tested products are free from ATP detectable contamination (<1.0fg).

HUMAN DNA FREE CERTIFICATE OF ANALYSIS

Every Lot of Abdos Micro Tips, Micro Centrifuge Tubes, Centrifuge Tubes , Cryo Vials, & Other Products are tested for ATP Free.

A. P11007 Lot no. A261118B B. P60116 Lot no. A251019A C. P10202 Lot no. M110919C07 D. P10163 Lot no. A281119A E. P10401 Lot no. A110919A

PROCEDURE:

Nucleic Acid (DNA) extraction and measurement were done by the procedures of Zachleder (50) as applied by Danovaro et al, (9) and Danovaro(10), with a few modifications to enhance DNA extraction from the sediment. Briefly, 1g of sediment (three replicates) was treated with 3.0 ml of 0.5N Perchloric acid, stirred for 3min & sonicated three times for 1min (with intervals of 30 sec). Nucleic acid extraction was carried out 75 °C for 30min under continuous stirring on water bath. After centrifugation (3000 rpm, 10min), the absorbance of the Total Nucelic Acid (TNA) in the supernatant was measured at 260 nm. For RNA take absorbance on 230 nm & for protein on 280 nm.

CONCLUSIONS:

The tested products are free from Human DNA detectable contamination (<0.5 pg/microliter).

Index

Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.
E10001	34	E11172D	64	E11283	150	E11346	142	E11542	23	E11712	65
E10002	34	E11173D	64	E11284	150	E11347	142	E11550	24	E11713	65
E10003	34	E11174D	64	E11285	150	E11348	142	E11551	24	E11714	65
E10004	34	E11175D	64	E11286	150	E11349	142	E11552	24	E11715	65
E10005	34	E11176D	64	E11290	153	E11350	142	E11601	122	E11716	65
E10006	34	E11177D	64	E11291	153	E11355	158	E11602	122	E11731	66
E10007	34	E11178D	64	E11300	147	E11356	158	E11603	122	E11732	66
E10008	34	E11179D	64	E11301	147	E11357	158	E11604	122	E11733	66
E10009	34	E11190	146	E11302	147	E11358	142	E11605	122	E11734	66
E10010	34	E11191	146	E11303	147	E11359	142	E11606	122	E11735	66
E11100	34	E11192	146	E11305	149	E11360	140	E11607	122	E11736	66
E11101	34	E11193	146	E11307	134	E11361	140	E11608	122	E11800	160
E11102	34	E11194	146	E11308	134	E11362	140	E11609	122	E11801	160
E11103	34	E11195	146	E11310	144	E11363	140	E11610	122	E11802	160
E11104	34	E11196	146	E11311	144	E11364	140	E11611	122	E11803	160
E11105	34	E11197	146	E11312	144	E11365	140	E11612	122	E11804	160
E11106	34	E11198	146	E11313	144	E11366	140	E11613	123	E11805	160
E11107	34	E11200	147	E11314	144	E11367	140	E11613 A	123	E11806	160
E11108	34	E11201	147	E11315	144	E11368	140	E11614	123	E11807	160
E11109	34	E11202	147	E11316	144	E11370	140	E11614 A	123	E11810	160
E11110	34	E11216	68	E11317	144	E11380	140	E11615	123	E11815	160
E11111	34	E11218	68	E11318	144	E11390	140	E11615 A	123	E11816	160
E11112	34	E11219	68	E11319	144	E11411	156	E11616	123	E11821	160
E11113	34	E11220	68	E11320	144	E11413	156	E11616 A	123	E11822	160
E11114	34	E11221	68	E11321	144	E11414	156	E11617	123	E11823	160
E11116	34	E11222	68	E11322	144	E11415	156	E11617 A	123	E11824	160
E11117	34	E11227	136	E11323	144	E11416	156	E11618	123	E11825	160
E11118	34	E11228	136	E11324	144	E11417	156	E11618 A	123	E11826	160
E11119	34	E11229	136	E11325	144	E11418	156	E11619	123	E11830	160
E11120	34	E11230	139	E11326	144	E11419	156	E11619 A	123	E11920	159
E11131	34	E11231	135	E11327	144	E11430	152	E11620	124	E11928	159
E11132	34	E11232	135	E11330	141	E11451	152	E11621	124	E11929	159
E11134	34	E11233	135	E11331	141	E11452	152	E11622	124	E11930	159
E11136	37	E11234	135	E11332	141	E11453	152	E11623	124	E11931	159
E11137	37	E11235	138	E11333	141	E11460	154	E11624	124	E11932	159
E11138	37	E11236	138	E11334	141	E11470	154	E11650	137	E11933	159
E11139	37	E11260	153	E11335	141	E11480	156	E11651	137	E11934	159
E11140	37	E11261	153	E11336	141	E11490	156	E11652	137	E11935	159
E11141	37	E11262	153	E11337	141	E11501	21	E11653	137	E11936	159
E11145	35	E11270	148	E11338	141	E11502	21	E11654	137	E11937	159
E11146	35	E11271	148	E11339	141	E11503	21	E11701	65	E11938	159
E11147	35	E11272	148	E11340	142	E11510	22	E11702	65	E11939	159
E11161	38	E11273	148	E11341	142	E11511	22	E11703	65	E11940	159
E11162	38	E11274	148, 150	E11342	142	E11512	22	E11704	65	E11941	159
E11163	38	E11280	150	E11343	142	E11513	22	E11705	65	E11942	159
E11164	38	E11281	150	E11344	142	E11540	23	E11706	65	E11943	159
E11171	64	E11282	150	E11345	142	E11541	23	E11711	65	E11944	159

Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.
E11948	159	E12244	99, 100, 101	E12415	79	P10101	42	P10168	42	P10405T	16
E11949	159	E12276	100	E12420	79	P10102	42	P10169	42	P10406	16
E11950	159	E12277	100	E12430	80	P10105	42	P10170	42	P10406T	16
E11951	159	E12278	100	E12431	80	P10106	42	P10171	43	P10407	16
E12100	94	E12279	100	E12432	80	P10107	43	P10172	51	P10407T	16
E12101	94	E12280	100	E12433	80	P10108	43	P10173	51	P10408	16
E12102	94	E12281	100	E12435	80	P10109	43	P10174	42	P10408T	16
E12103	94	E12282	100	E12436	80	P10110	43	P10175	42	P10409	17
E12104	94	E12283	100	E12437	80	P10111	43	P10176	43	P10410	17
E12126	95	E12284	100	P10001	46	P10112	43	P10177	43	P10411	17
E12127	95	E12285	100	P10002	46	P10113	43	P10178	43	P10412	17
E12128	95	E12286	100	P10003	46	P10114	43	P10201	14	P10413	17
E12129	95	E12287	100	P10004	46	P10115	42	P10201A	14	P10414	17
E12130	95	E12288	100	P10005	46	P10116	43	P10202	14	P10415	17
E12151	96	E12289	100	P10006	46	P10117	43	P10203	14	P10416	17
E12152	96	E12290	100	P10007	46	P10118	43	P10203A	14	P10417	17
E12153	96	E12291	100	P10008	46	P10119	43	P10204	14	P10418	17
E12154	96	E12292	100	P10010	46	P10120	43	P10204A	14	P10419	16
E12155	96	E12293	100	P10011	46	P10129	42	P10205	14	P10421	16
E12176	97	E12326	101	P10012	46	P10130	42	P10207	14	P10423	17
E12177	97	E12327	101	P10013	46	P10137	43	P10208	14	P10424	17
E12178	97	E12328	101	P10014	46	P10138	43	P10209	14	P10425	17
E12179	97	E12329	101	P10015	46	P10139	43	P10210	14	P10426	17
E12180	97	E12330	101	P10016	46	P10140	43	P10301	72	P10427	17
E12201	98	E12331	101	P10020	47	P10141	43	P10301A	72	P10430	16
E12202	98	E12332	101	P10021	47	P10142	43	P10301A1	72	P10431	16
E12203	98	E12333	101	P10022	47	P10144	43	P10302	72	P10432	17
E12204	98	E12334	101	P10023	47	P10145	43	P10303	72	P10441	16
E12205	98	E12335	101	P10024	47	P10147	43	P10304	72	P10442	16
E12226	99	E12336	101	P10025	47	P10148	43	P10304A	72	P10443	16
E12227	99	E12337	101	P10026	47	P10149	43	P10304A1	72	P10444	16
E12228	99	E12338	101	P10027	47	P10150	43	P10305	72	P10449	17
E12229	99	E12339	101	P10040	47	P10152	43	P10305A	72	P10450	17
E12230	99	E12340	101	P10041	47	P10153	43	P10305A1	72	P10451	17
E12231	99	E12341	101	P10042	47	P10154	43	P10306	72	P10452	17
E12232	99	E12342	101	P10043	47	P10155	43	P10307	72	P10453	17
E12233	99	E12343	101	P10044	47	P10156	43	P10308	72	P10480	18
E12234	99	E12376	102	P10045	47	P10157	43	P10309	72	P10481	18
E12235	99	E12377	102	P10046	47	P10158	43	P10310	72	P10482	18
E12236	99	E12400	85	P10047	47	P10159	43	P10311	72	P10483	18
E12237	99	E12401	85	P10060	47	P10160	43	P10312	72	P10484	18
E12238	99	E12402	85	P10061	47	P10161	42	P10313	72	P10485	18
E12239	99	E12410	79	P10062	47	P10163	42	P10401	16	P10486	18
E12240	99	E12411	79	P10063	47	P10164	42	P10402	16	P10487	18
E12241	99	E12412	79	P10064	47	P10165	42	P10403	16	P10488	18
E12242	99	E12413	79	P10065	47	P10166	42	P10404	16	P10501	55
E12243	99	E12414	79	P10099	55	P10167	42	P10405	16	P10503	55

Code	Page No.										
P10601	67	P10924	77	P11021	51	P11069	54	P11141	111	P11510	115
P10602	67	P10925	77	P11022	51	P11070	53	P11142	111	P11511	115
P10603	67	P10926	77	P11023	51	P11071	53	P11143	111	P11512	115
P10604	67	P10927	76	P11024	51	P11072	54	P11144	111	P11513	115
P10605	67	P10928	76	P11025	51	P11073	54	P11145	111	P11520	115
P10606	67	P10931	76	P11026	51	P11074	54	P11146	111	P11521	115
P10701	88	P10932	76	P11027	51	P11075	54	P11147	111	P11522	115
P10702	88	P10901	76	P11028	51	P11076	54	P11148	111	P11523	115
P10705	88	P10902	76	P11029	51	P11077	54	P11151	111	P11620	121
P10706	88	P10903	76	P11030	51	P11078	54	P11152	111	P11621	121
P10707	88	P10904	76	P11031	51	P11079	54	P11153	111	P11622	121
P10708	88	P10933	76	P11032	51	P11080	54	P11154	111	P11901	121
P10709	88	P10934	76	P11033	51	P11081	54	P11155	111	P11902	121
P10711	88	P10935	76	P11034	51	P11082	54	P11156	111	P11903	121
P10713	89	P10936	76	P11035	51	P11083	54	P11157	111	P11904	121
P10714	89	P10937	76	P11036	51	P11084	54	P11158	111	P11905	121
P10715	89	P10938	76	P11037	51	P11085	54	P11160	112	P11907	121
P10716	89	P10939	76	P11038	51	P11086	54	P11161	112	P11908	121
P10717	89	P10940	76	P11039	51	P11087	54	P11162	112	P21020	82
P10718	89	P10970	78	P11040	53	P11088	54	P11163	112	P21021	82
P10719	90	P10985	78	P11041	53	P11089	54	P11164	112	P21022	82
P10721	89	P10986	78	P11042	53	P11090	54	P11170	113	P21023	82
P10722	89	P10987	78	P11043	53	P11092	51	P11171	113	P21024	82
P10723	89	P10988	78	P11044	53	P11093	51	P11172	113	P21025	82
P10901	76	P10989	78	P11045	53	P11094	51	P11173	113	P21026	82
P10902	76	P10990	78	P11046	53	P11095	51	P11174	113	P21030	83
P10903	76	P10991	78	P11047	51	P11096	51	P11180	113	P21031	83
P10904	76	P11001	50	P11048	51	P11097	51	P11181	113	P21032	83
P10905	76	P11002	50	P11049	50	P11098	51	P11182	113	P21033	83
P10906	76	P11003	50	P11050	53	P11100	51	P11183	113	P21040	83
P10907	76	P11004	50	P11051	53	P11101	90	P11184	113	P21041	83
P10908	76	P11005	50	P11052	53	P11103	90	P11191	115	P21050	83
P10909	76	P11006	50	P11053	53	P11104	106	P11192	115	P21051	83
P10910	76	P11007	50	P11054	53	P11105	106	P11200	115	P21052	83
P10911	77	P11008	50	P11055	53	P11106	107	P11620	121	P21060	84
P10912	77	P11009	50	P11056	53	P11107	107	P11621	121	P21061	84
P10913	77	P11010	50	P11057	53	P11126	112	P11622	121	P21062	84
P10914	77	P11011	50	P11058	53	P11127	112	P11301	116	P21063	84
P10915	77	P11012	50	P11060	54	P11128	112	P11302	116	P21064	84
P10916	77	P11013	50	P11061	54	P11131	111	P11305	116	P21065	84
P10917	77	P11014	50	P11062	54	P11132	111	P11306	116	P21066	84
P10918	77	P11015	50	P11063	54	P11133	111	P11307	116	P21067	84
P10919	77	P11016	50	P11064	54	P11134	111	P11308	116	P21068	84
P10920	77	P11017	50	P11065	54	P11135	111	P11311	116	P21069	84
P10921	77	P11018	50	P11066	54	P11136	111	P11312	116	P21070	84
P10922	77	P11019	50	P11067	54	P11137	111	P11313	116	P21071	84
P10923	77	P11020	51	P11068	54	P11138	111	P11314	116	P21072	84

Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.
P20101	55	P20604	19	P21021	82	P21107	86	P50405	119
P20102	55	P20605	19	P21022	82	P21108	86	P50406	119
P20104	55	P20606	30	P21023	82	P21109	86	P50407	119
P20103	55	P20607	30	P21024	82	P31201	71	P50408	119
P20105	55	P20611	29	P21025	82	P31202	71	P50501	119
P20106	55	P20612	30	P21026	82	P31205	71	P50502	119
P20107	55	P20613	30	P21030	83	P31206	71	P50503	119
P20201	19	P20614	30	P21031	83	P31207	71	P50504	119
P20202	19	P20615	29	P21032	83	P31208	71	P50505	119
P20203	19	P20616	28	P21033	83	P31209	71	P50506	119
P20204	19	P20701	108	P21040	83	P31210	71	P50507	119
P20205	19	P20702	108	P21041	83	P40101	73	P50508	119
P20206	105	P20703	108	P21050	83	P40102	73	P50601	118
P20206 Assorted	105	P20704	108	P21051	83	P40103	73	P50602	118
P20207	105	P20705	108	P21052	83	P40104	73	P50603	118
P20207 Assorted	105	P20706	108	P21060	84	P40105	73	P50604	118
P20208	110	P20707	108	P21061	84	P40106	73	P50605	118
P20209	110	P20708	108	P21062	84	P40112	73	P50606	118
P20210	105	P20709	108	P21063	84	P40113	73	P50607	118
P20212	20	P20710	108	P21064	84	P50101	120	P50608	118
P20213	20	P20711	108	P21065	84	P50102	120	P50701	118
P20214	20	P20712	108	P21066	84	P50103	120	P50702	118
P20215	20	P20713	108	P21067	84	P50104	120	P50703	118
P20216	20	P20714	108	P21068	84	P50105	120	P50704	118
P20218	20	P20715	108	P21069	84	P50106	120	P50705	118
P20219	20	P20716	109	P21070	84	P50111	131	P50706	118
P20225	21	P20717	109	P21071	84	P50112	131	P50707	118
P20226	21	P20718	109	P21072	84	P50113	131	P50708	118
P20230	105	P20720	109	P21080	85	P50114	131	P50802	118
P20231	105	P20721	109	P21081	85	P50201	120	P50803	118
P20302	120	P20722	109	P21090	86	P50202	120	P50804	118
P20441	108	P20723	109	P21091	86	P50203	120	P50805	118
P20442	108	P20724	109	P21092	86	P50204	120	P50806	118
P20443	108	P20725	109	P21093	86	P50205	120	P50807	118
P20444	108	P20726	109	P21094	86	P50206	120	P50808	118
P20501	126	P20727	109	P21095	86	P50301	119	P50902	118
P20502	126	P20728	109	P21096	86	P50302	119	P50903	118
P20503	126	P20729	109	P21097	86	P50303	119	P50904	118
P20504	126	P21010	82	P21098	86	P50304	119	P50905	118
P20511	126	P21011	82	P21099	86	P50305	119	P50906	118
P20512	126	P21012	82	P21100	86	P50306	119	P50907	118
P20601	29	P21013	82	P21101	86	P50307	119	P50908	118
P20601 Assorted	29	P21014	82	P21102	86	P50308	119	P60106	28
P20602	29	P21015	82	P21103	86	P50401	119	P60106A	28
P20602 Assorted	29	P21016	82	P21104	86	P50402	119	P60106A1	28
P20603	29	P21017	82	P21105	86	P50403	119	P60107	28
P20603 Assorted	29	P21020	82	P21106	86	P50404	119	P60107A	28

Code	Page No.	Code	Page No.	Code	Page No.
P60107A1	28	P70401	128	U20418A	130
P60108	27	P70402	128	U20447	129
P60109	27	P70501	132	U20448	129
P60110	27	P70502	132	U20449	130
P60112	27	P70503	132	U20450	130
P60113	27	P70504	132	U40101	128
P60114 W	28	P70505	132	U40102	129
P60114 B	28	P70506	132	U40103	127
P60114 R	28	P70601	125	U40104	127
P60114 Y	28	P70602	125	U40105	127
P60114 G	28	P70707	132	U40106	127
P60115	26	P70708	132	U40107	127
P60116	26	U20307	31	U40108	127
P60117	26	U20307	31	U40109	127
P60118	26	U20309	31	U40110	127
P60119	28	U20309	31	U40111	127
			31	U40112	127
P60119A	28	U20311 U20312			
P60119A1	28		31	U40113	127
P70101	126	U20313	31	U40114	127
P70102	126	U20314	31	U40120	127
P70104	125	U20315	31	U50103	128
P70106	129	U20316	31	U50104	128
P70107	129	U20317	31	U50110	131
P70201	37	U20318	31	U50115	131
P70202	70	U20319	31		
P70203	38	U20320	31		
P70204	70	U20321	31		
P70205	69	U20322	31		
P70211	125	U20323	31		
P70212	125	U20324	31		
P70213	125	U20325	31		
P70301	130	U20326	31		
P70302	130	U20327	31		
P70303	130	U20328	31		
P70311	124	U20329	31		
P70312	124	U20330	31		
P70313	125	U20331	34		
P70314	124	U20332	34		
P70315	124	U20333	34		
P70316	124	U20334	34		
P70317	124	U20341	129		
P70318	124	U20342	129		
P70319	124	U20343	129		
P70320	124	U20344	130		
P70321	124	U20345	130		
P70322	124	U20346	130		
P70323	124	U20417A	130		

	Product	Page No.		Product Po	ıge No.
Α	Abdos Brand - Derma Guard Blue Nitrile Gloves - 9.5 Inches Length	129	F	Fast Release Pipette Pump	68
	Abdos Brand – Derma Guard White Latex Gloves – 9.5 Inches Length	130		Fixed Premium Pipette, PP	34
	Abdos N95 Respirator Mask	130		Filter Pipette Tips, Bulk in Resealable Bags, PP	50
	Assorted Workstation storage Bin, ACRYLIC	125		Filter Pipette Tips - Racked, PP	51
	ABDOS Mini Horizontal Gel Unit	94		Filter Pipette Tips, Sterile Racked, PP	51
	ABDOS Mini Plus Horizontal Gel Unit	95		Floating Rack For Micro Centrifuge Tube, PC	21
	ABDOS Midi Horizontal Gel Unit	96		Foldable Space Saving Rack, PP	20
				Freezing Cardboard Cryo Boxes, Cardboard	30
	ABDOS Maxi Horizontal Gel Unit	97		Frosty Mate™ Storage Racks, PC	106
	ABDOS Vertical Dual Mini Gel System	99		Frosty Mate™ Colour Change Racks, PP	107
	ABDOS Vertical Midi - Gel System	100		Funnel, PP	124
	ABDOS Vertical Dual Midi Gel System	101		Funnel Holder, PP	124
	Amber Wide Mouth Bottle Graduated, HDPE	113	G	Glove Box Holder, Acrylic	130
	Aspirator Bottle with Stopcock, PP	114			
	AEROVAC-Oil-Free Vacuum Pumps	160	Н	Handypette Pipette Aid	68 140
	Autoclavable Bags, PP	127		Hotblock - LED Digital Dry Bath	140
			L	Last Drop™ , Low Retention Micro Centrifuge Tubes, PP	14
В	Beakers Without Handle, PP & TPX	118		$Last Drop^{\text{TM}}, Low Retention Filter Pipette Tips, Bulk in Resealable Bags, PP$	53
	Beakers With Handle, PP & TPX	118		Last $Drop^{TM}$, Low Retention Filter Pipette Tips – Racked, PP	54
	Biohazard Disposable Bags, PP	127		Last Drop™, Low Retention Filter Pipette Tips - Sterile Racked, PP	54
	Bio Reaction Tubes, PP	84		$Last Drop^{\text{TM}}, Low Retention Refill Filter Pipette Tips - Sterile, PP$	54
	BIOFILL QUICK-CONNECT PEDESTAL SYSTEM	85		Last Drop™ Low Retention Pipette Tips, Bulk in Resealable Bags, PP	46
	BIOFILL Bottle Top Filtration System	86		Last Drop™ Low Retention Pipette Tips, Racked, PP	47
	Carlos DD	11.4		Last Drop™ Low Retention Pipette Tips, Sterile Racked, PP	47
С	Carboy, PP	114		Last Drop™ Low Retention Pipette Tips, Refill Pack, PP	47
	Carboy with Stopcock, PP	114		Large Volume Pipette Tips	42
	Carboy Wide Mouth, PP	115		Large Volume Filter Pipette Tips	50
	Cell Culture Flasks, PS	82	М	Measuring Cylinder, PP Class "B"	119
	Cell Culture Dish, PS	83	М	Measuring Cylinder, TPX Class "B"	119
	Cell Scraper, PP/HIPS	83		Measuring Cylinder, TPX Class "A"	119
	Cell Spreader	78		Micro Centrifuge Tubes, PP	14
	Cell Strainers	83		MaxiRCF™ Trace Metal Free Centrifuge Tubes	18
	Centrifuge Tubes Conical Bottom, PP/HDPE	16		Microprocessor based Programmable Power Supplies	102
	Centrifuge Tubes Conical Bottom, PS/HDPE	16		Multi Combination Racks, PP	104
	Centrifuge Tubes Self Standing, PP/HDPE	17		Media Bottles, PETG	85
	Centrifuge Tube Box, PP	19		Narrow Mouth Bottle Graduated, PP	111
	Click Together Conical Tube Racks, ABS	20	N	Narrow Mouth Bottle Graduated, FF	111
	Cryo Vial External Thread, PP	26		Narrow Mouth Bottle Graduated, HDPE	111
	Cryo Vial Internal Thread, PP	27		Narrow Mouth Bottle (Carboy Type), PP	112
	Cryo Coders for External & Internal Threaded Vials, HDPE	28			
	Cryo Box, PC	29	Р	Premium Plus Pipettes Fully-Autoclavable, PP	35
	·			Premium Pipettes Semi-Autoclavable, PP	34
	Cryo Box, System 100 places, PC	29		Premium Plus 8-Channel Adjustable Multichannel Pipette	37
	Cryo Cube Box / Storage Cube Box, PP	30		Premium Plus 12-Channel Adjustable Multichannel Pipette	37
	Cryo Apron	31		Premium Electronic Pipette Pipette Pack Stand, ACRYLIC	38
	Cryo Gloves	31		Pipette Rack Stand, ACRYLIC Pipette Rack Stand (Carsol Type), PP	37 38
D	Digital Model Power Supply	102		Pipette Rick Stand (Carson Type), PP Pipette Tips, Bulk in Resealable Bags, PP	42
_	Double Jumbo Test Tube Rack, RPP	108		Pipette Tips, Racked, PP	43
	National reservation in the second sec	.50		Pipette Tips, Sterile Racked, PP	43
E	Empty Micro Tip Box, PP	55		Pipette Tips, Refill Pack, PP	43
	Expanding Tube Rack, PP	105		Pipette Stand Vertical, PP	69

	Product	Page No.		Product	Page No.
Р	Pipette Stand Horizontal, PP	70		Supreme Bottle Top Dispenser	65
	Pipette Storage Rack with Magnet, ABS	70		Supreme Plus Bottle Top Dispenser	65
	Pipette Storage Rack, Assorted cargo	70		Supreme Duet Bottle Top Dispenser	66
	Pasteur Pipettes, LDPE	71		Swirl Mini Micro Centrifuge	21
	Petri Dish, PS	76, 77		Swirl Maxi Micro Centrifuge	22
	Petri Dish Stand, ACRYLIC	78		Swirl Clinical Centrifuge	23
	PCR Tubes, PP	88		Swirl Micro Plate Centrifuge	24
	PCR Plates Family, PP	89		Swirltop – Ultra Flat & Eco Magnetic Stirrer	134
	PCR Workup Rack, PP	90		Swirltop – Digital (LED) Magnetic Stirrer & Hot Plate	135
	PCR workstation rack with lid, PP	90		Swirltop – Digital (LCD) Magnetic Stirrer & Hot Plate	136
	Polygrid Test Tube Racks, PP	109		Swirlex - Digital Handheld Homogenizer	79
	Polywire Racks, Delrin	109		Swirlex - Flapping Homogenizer (Stomaker)	80
	PureRight™ Individually Wrapped Centrifuge Tube Conical Bottom	17		Swirltop - 7 inch LCD Digital Magnetic Stirrer & Hot Plate	137
	PureRight™ Pipette Tips, Individually Wrapped, Sterile, PP	42		Swirltop – Multi Channel Magnetic Stirrer & Hot Plate	138
	PureRight™ Last Drop Low Retention Pipette Tips, Individually	46		Swirlmax -Tube Roller	139
	Wrapped, Sterile, PP			Swirlex – LCD Digital Overhead Stirrer	144
	PureRight™ Filter Pipette Tips, Individually Wrapped, Sterile, PP	50		Swirlex – Vortex Shaker	146
	PureRight™ Last Drop Low Retention Filter Pipette Tips, Individually	53		Swirlex - Microplate Mixer	147
	Wrapped, Sterile, PP			Swirlex - Digital Handheld Homogenizer	79
R	Rack for Micro Centrifuge Tube, RPP	19		Swirlex - Flapping Homogenizer (Stomaker)	80
	Rack For Micro Centrifuge Tube, PC	19		Swillex Trapping normagenizer (Stornaker)	00
	Racked Centrifuge Tubes Conical Bottom, Paper	17	Т	Test Tube Rack, RPP & PC	108
	RIA Vial & Cap / Test Tube & Cap	72		THERMO MIX- LCD Digital	142
	Rave Pipette Controller, PP	68		Tissue Culture Treated Plates, PS	82
	Rave Pipette Filler	69		Transport/ Resealable Bags with Zip Lock, PE	127
	Refill Filter Pipette Tips, Sterile PP	51		Twisty Tube Rack, PP	105
	Reversible Rack with Cover, PP	105	U	Universal Centrifuge Tube Rack, PP	20
	Reagent Reservoir, HIPS	55			
	Retort Stand, PP/PE Coated Rod	125	V	Vacuum Guage Round / Cubic Dessicator	123
	Rotator Workstation, PP	105	w	Water Proof Cryo Gloves	31
	Roller Bottles, PS	84		Wide Mouth Bottle Graduated, PP	112
s	Sample Container, PP/HDPE	73		Wide Mouth Bottle Graduated, LDPE	113
Ū	Safety Face Shield, PC	129		Wide Mouth Bottle Graduated, HDPE	113
	Safety Goggles Box, ACRYLIC	129		Wash Bottle, LDPE	116
	Safety Goggles, PC	126		Wash Bottle (Comet), LDPE	116
	Scoop, HDPE	121		Workstation storage/ Dispenser Bin, ACRYLIC	126
	Separatory Funnel, PP	124		Water Bottle for Animal Species, PP/SS	126
	Separatory Funnel Holder, PP	125		Wavex – Classic Tube Rotator	147
	Sealing Films, Aluminium	90		Wavex-LCD Rotating Mixer	148
	Sealing Films, Polyester	89		-	149
	Sealing Mats, Silicone Rubber	89		Wavex - Classic Rotating Mixer	150
	Serological Pipettes Sterile, PS	67		Wavex-LCD Rotating Mixer	
	Single Hand Cryo Holder Rack, PP	28		Wavemax - Digital Rocking Shaker	151
	Soft Inoculation Loop, ABS	78		Wavemax – Digital (3D) Dancing Shaker	152
	Spatula, PP	132		Wavemax – Orbital Shaker Junior	153
	Spray Bottle, LDPE	115		Wavemax – Orbital Shaker	153
	Stepmate Stepper	64		Wavemax – LED Digital Orbital & Linear Shaker	154
	Storage Vial, PP	28		Wavemax - Heavy Duty LCD Digital Orbital & Linear Shaker	156
	Strip Tubes without Cap – 8 strips & 12 strips, PP	88		Wavemax-Digital Incubator	158
	Strip Caps, PP	88		Wavemax - Incu-shaker Mini	159

Terms & Conditions of Sale

- Buyer: The person, firm, or Company who purchases Goods from the Company.
- Company / Manufacturer: **Abdos Labtech Pvt Ltd., India.**
- Brand: Unless otherwise agreed, products will be supplied under the Abdos brand name.
- **Contract:** Any Contract between the Company and Buyer for the Goods sale and purchase, incorporating these conditions.
- **Goods:** Any Goods agreed in the Contract to be supplied to the Buyer by the Company [including any part of parts of them].
- **Price:** All prices are quoted as per Incoterms 2010. The Initial Purchase Price will be decided at the time of prevailing orders. At any time before delivery, the Company reserve the rights and may adjust the price to reflect any increase in the costs of supplying the Goods.
- **Currency:** The prime currency of the Contract will be US Dollar or Euro unless otherwise specified or agreed for any other currency.
- **Purchase Order:** Once a final purchase order has been placed by Buyer and accepted by Company, it shall not be cancelled or modified by Buyer without the written consent of Manufacturer, except in the case of manifest error.
- **Delivery:** Any dates specified by the Company for delivery of the Goods are intended to be estimated, and time for delivery shall not be made of the essence by notice. If no dates are so specified, delivery shall be within a reasonable time.
- Payment Terms: Abdos standard payment terms either 100% Advance along-with the order or 100% through Confirmed, Irrevocable & Freely Negotiable L/C Payable at Sight.
- **Shipping Terms:** Abdos standard shipping terms are ex-works. However, no additional charges will be borne by Abdos; we also supply goods on FCA, FAS, FOB, C&F, CFR, CIF, CIP & DAP Shipping Terms based on Buyer's specific requirement.
- **Delivery and Safety:** All Products delivered according to the above terms & conditions shall be considered delivered when suitably packed for shipment in Manufacturer's standard shipping containers, marked for shipment at Buyer's address, and placed with a carrier Incoterms2010. The buyer shall pay all applicable taxes, customs, duties, insurance, and similar charges that may be assessed against the Products after delivery by Manufacturer to the carrier.
- Note: Before you place an order, please check the Adapter plug, Power & frequency as per your requirement.



© April 2020. All rights reserved. Every effort has been made to ensure the content of this publication is correct. ABDOS Labtech Pvt. Ltd. cannot take responsibility for any errors or omissions. LASTDROP, FROSTY MATE, DERMA GUARD are registered Trademarks and owned by ABDOS LABTECH Pvt. Ltd. MaxiRCF, PureRight, Premium Plus, SUPER, SWIRL, SWIRLEX, Swirlmax, Swirltop, BIOFILL, AEROVAC, Wavemax, Wavex, Thermo

Mix, HOTBLOCK are Trademarks of ABDOS Labtech Pvt. Ltd.



ABDOS LABTECH PRIVATE LIMITED

Reg. Office: 13A, Govt. Place East, 2nd Floor, Kolkata – 700069, West Bengal - INDIA Head Office: 319, DLF Tower - A, DDA District Center, Jasola, New Delhi - 110025, INDIA

Europe: Columbusweg 10, 5928 LC Venlo, NETHERLANDS

Work: Shiv Ganga Industrial Estate, Plot No. 1 Lakeshwari, Bhagwanpur, Roorkee - 247667 Uttarakhand, INDIA Ph: +(91) 11 41081897 F: +(91) 11 45644222 E: labtech@abdosindia.com W: www.abdoslifesciences.com